PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 23, T 17N, R 29W COUNTY WASHINGTON

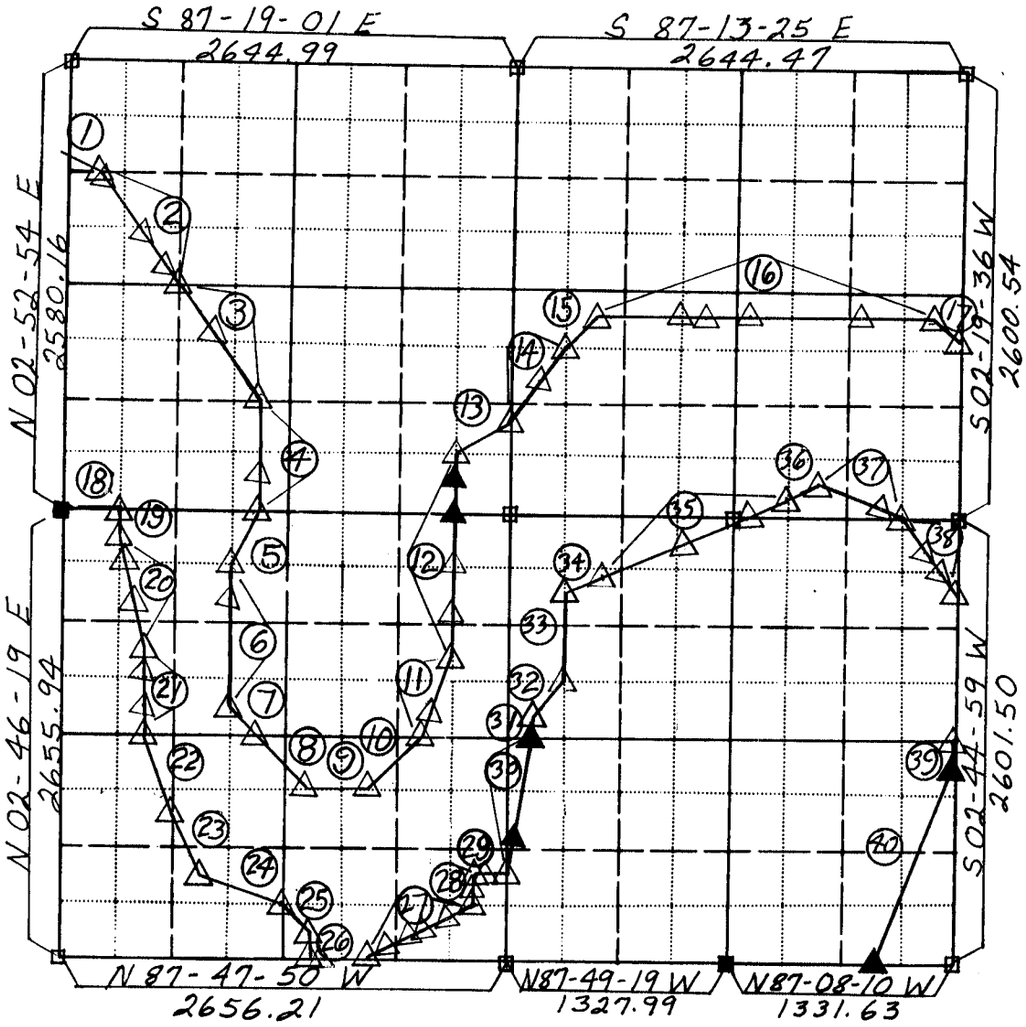

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2109-1-11A		1134.84	662,045.88	1,394,493.16	△ 18" rod in Sec. 22 T. 17N, R. 29W
	1		S61-18-15 E	206.76			
		2109-1-12		1164.19	661,946.50	1,394,674.50	△ with 18" rod
	2		S34-53-19 E	32.84			
		2109-1-12A		1184.95	661,919.63	1,394,693.37	△ cemeted in a drilled hole
	2		S34-53-19 E	390.01			
		2109-1-12B		1191.86	661,599.91	1,394,916.49	△ with 18" rod
			S34-53-19 E	210.04			

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____

COUNTY, ARKANSAS

Field Book No. 68-8-6 Chain, 68-8-7 TRANSIT, 68-8-2 LEVEL Date: _____ SEP 68

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 6

GN MN 1°10' 7°04'E

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 23, T 17 N, R 29 W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2109-1-12C		1141.46	661,427.67	1,395,036.58	△ with 18" I. rod
	2		S34-53-19E	181.95			
		2109-1-13= 2205-2-1		1133.41	661,278.42	1,395,140.36	△ "
	3		S34-49-30E	380.91			
		2205-2-1A		1127.85	660,965.67	1,395,357.57	△ "
	3		S34-49-30E	435.81			
		2205-2-2		1121.93	660,608.20	1,395,606.61	△ "
	4		S02-40-26W	430.76			
		2205-2-2A		1125.18	660,178.20	1,395,586.58	△ "
	4		S02-40-26W	216.30			
		2205-2-3= 2206-10		1132.33	659,962.29	1,395,576.47	△ with 30" I. rod
	5		S30-07-58W	377.06			
		2206-11		1125.01	659,636.43	1,395,387.33	△ "
	6		S02-45-40W	214.85			
		2206-11A		1132.62	659,421.80	1,395,376.98	△ "
	6		S02-45-40W	610.27			
		2206-12		1124.87	658,812.15	1,395,347.57	△ "
	7		S42-29-13E	233.84			
		2206-13= 2205-1-1		1129.04	658,639.70	1,395,505.52	△ "
	8		S42-34-08E	466.96			
		2205-1-2		1129.42	658,295.78	1,395,821.43	△ "
	9		S87-29-03E	332.08			
		2205-1-3		1127.91	658,281.20	1,396,153.17	△ with 18" I. rod
	10		N48-01-02E	467.67			
		2205-1-4		1128.93	658,593.99	1,396,500.77	△ "
	11		N21-26-53E	134.62			
		2205-1-4A		1132.05	658,719.27	1,396,549.99	△ with 30" I. rod
	11		N21-26-53E	384.30			
		2205-1-5		1157.84	659,076.90	1,396,690.49	△ "
	12		N02-44-11E	228.12			
		2205-1-5A		1173.91	659,304.73	1,396,701.37	△ "
	12		N02-44-11E	298.71			
		2205-1-5B		1174.07	659,603.06	1,396,715.62	△ "
	12		N02-44-11E	308.93			

SHEET 2 of 6

SWL FORM 136

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 23, T 17 N, R 29 W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2205-1-5C		1163.77	659,911.59	1,396,730.37	△ with 30" I. rod
	12		N02-44-11E	191.47			
		2205-1-5D		1179.67	660,102.82	1,396,739.52	▲ Conc. Mon.
	12		N02-44-11E	116.04			
		2205-1-6		1169.85	660,218.71	1,396,745.06	▲ Conc. Mon.
	13		N66-52-25E	368.45			
		2205-1-7= 2210-1		1129.08	660,363.41	1,397,083.87	△ with 18" I. rod
	14		N36-52-37E	292.81			
		2210-1A		1141.95	660,597.61	1,397,259.55	△ "
	14		N36-52-37E	295.73			
		2210-2		1126.10	660,834.14	1,397,436.99	△ "
	15		N48-14-40E	231.62			
		2210-3= 2211-1		1130.43	660,988.36	1,397,609.75	△ "
	16		S87-13-06E	494.00			
		2211-1A		1155.70	660,964.41	1,398,103.15	△ "
	16		S87-13-06E	138.21			
		2211-1B		1146.29	660,957.71	1,398,241.19	△ "
	16		S87-13-06E	265.12			
		2211-1C		1148.49	660,944.84	1,398,505.98	△ "
	16		S87-13-06E	666.58			
		2211-1D		1127.25	660,912.48	1,399,171.75	△ "
	16		S87-13-06E	424.72			
		2211-2		1136.16	660,891.85	1,399,595.95	△ "
	17		S51-11-51E	206.10			
		2211-3		1154.72	660,762.69	1,399,756.57	△ "

SHEET 3 of 6

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 23, T -17-N, R -29-W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2203-7		1141.58	660,019.92	1,394,408.19	▲old stone replaced with Conc. Mon.
	18		S86-54-16E	332.21			
		2206-1		1122.60	660,001.98	1,394,739.91	△with 30" I. rod
	19		S02-46-28W	165.67			
		2206-2		1141.99	659,836.50	1,394,731.89	△with 18" I. rod
	20		S11-17-26E	171.50			
		2206-2A		1139.59	659,668.46	1,394,765.44	△cemented in a drilled hole
	20		S11-17-26E	260.90			
		2206-2B		1164.77	659,412.75	1,394,816.49	△with 18" I. rod
	20		S11-17-26E	251.35			
		2206-3		1220.49	659,166.42	1,394,865.67	△ "
	21		S02-46-43W	142.13			
		2206-3A		1243.28	659 024.42	1,394,858.78	△ "
	21		S02-46-43W	201.99			
		2206-3B			658,822.62	1,394,848.99	△ "
	21		S02-46-43W	152.27			
		2206-4		1252.82	658,670.48	1,394,841.60	△ "
	22		S15-44-30E	234.79			
		2206-4A		1214.08	658,444.50	1394,905.30	△ "
	22		S15-44-30E	154.36			
		2206-4B		1203.96	658 295.93	1,394,947.18	△Cemeted in a drilled hole
	22		S15-44-30E	133.81			
		2206-5			658,167.34	1,394,983.42	△ "
	23		S23-57-36E	147.28			
		2206-5A		1227.73	658,032.71	1,394,043.25	△ "
	23		S23-57-36E	147.94			
		2206-5B		1228.43	657,897.48	1,395,103.34	△with 18" I. rod
	23		S23-57-36E	73.63			
		2206-6		1209.43	657,830.16	1,395,133.26	△ "
	24		S69-17-30E	210.66			
		2206-6A		1186.20	657,755.67	1,395,330.31	△ "
	24		S69-17-30E	312.80			
		2206-7		1186.40	657,645.06	1,395,622.90	△ "
	25		S42-42-25E	232.77			

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 23, T -17- N, R -29- W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2206-8		1153.08	657,474.01	1,395,780.78	△ with 18" I. rod
	26		S02-47-25W	63.58			
		2206-8A		1175.19	657410.54	1,395,777.69	△ "
	26		S02-47-25W	101.03			
		2206-9= 2209-1		1194.18	657,309.66	1,395,772.77	△ "
		2209-4		1138.11	657,296.90	1,396,104.55	△ "
	27		N66-05-40E	135.97			
		2209-4A		1163.92	657,352.00	1,396,228.86	△ "
	27		N66-05-40E	160.56			
		2209-4B		1142.47	657,417.06	1,396,375.64	△ "
	27		N66-05-40E	264.88			
		2209-4C		1149.32	657,524.40	1,396,617.80	△ "
	27		N66-05-40E	182.87			
		2209-5		1144.82	657,598.12	1,396,784.11	△ "
	28		N02-48-24E	99.76			
		2209-5A		1159.47	657,697.69	1,396,788.99	△ "
	28		N02-48-24E	63.96			
		2209-6		1138.86	657,761.50	1,396,792.12	△ with 30" I. rod
	29		S87-37-42E	91.49			
		2209-6A		1163.93	657,757.71	1,396,883.59	△ "
	29		S87-37-42E	74.41			
		2209-7		1163.52	657,754.63	1,396,958.00	△ "
	30		N14-16-48E	203.88			
		2209-7A		1130.45	657,952.29	1,397,008.31	▲ Conc. Mon.
	30		N14-16-48E	630.58			
		2209-8		1128.63	658,563.47	1,397,163.87	▲ Conc Mon
	31		N04-49-01W	63.33			
		2209-9= 2213-1		1128.01	658,626.58	1,397,158.55	△ with 30" I. rod
	32		N36-12-43E	316.85			
		2213-2		1127.86	658,882.23	1,397,345.74	△ "
	33		N02-48-34E	466.40			
		2213-3= 2210-5			659,348.07	1,397,368.60	△ This mon. set in water
	34		N69-48-24E	365.22			

SHEET 5 of 6

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 23, T - 17-N, R - 29-W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2210-6		1131.16	659,474.14	1,397,711.37	△ with 30" I. rod
	35		N68-48-22E	554.80			
		2210-6A		1133.26	659,674.71	1,398,228.65	△ "
	35		N68-48-22E	416.22			
		2210-6B		1129.74	659,825.23	1,398,616.81	△ "
	35		N68-48-22E	190.35			
		2210-7=2211-10		1133.15	659,894.09	1,398,794.40	△ "
	36		N60-46-08E	113.37			
		2211-11		1127.29	659,949.45	1,398,893.33	△ 30" I rod yield to top rock on line
	37		S69-10-09E	406.54			
		2211-11A		1129.83	659,804.88	1,399,273.34	△ with 30" I. rod
	37		S69-10-09E	118.45			
		2211-12		1126.48	659,762.73	1,399,384.08	△ "
	38		S31-29-02E	245.98			
		2211-12A		1132.43	659,552.96	1,399,512.55	△ "
	38		S31-29-02E	186.49			
		2211-12B		1133.84	659,393.85	1,399,609.99	△ "
	38		S31-29-02E	157.69			
		2211-13		1133.74	659,259.28	1,399,692.40	△ "
		2214-2-3		1135.79	658,447.25	1,399,653.40	△ "
	39		S02-44-60W	162.60			
		2214-1-1		1136.30	658,284.84	1,399,645.60	▲ Conc. Mon.
	40		S26-27-27W	1241.97			
		2214-1-2		1135.43	657,172.95	1,399,092.26	▲ Conc. Mon.

SHEET 6 of 6

SWL FORM 136
REVISED FEB. 66