PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 25, T 17N, R 29W COUNTY WASHINGTON

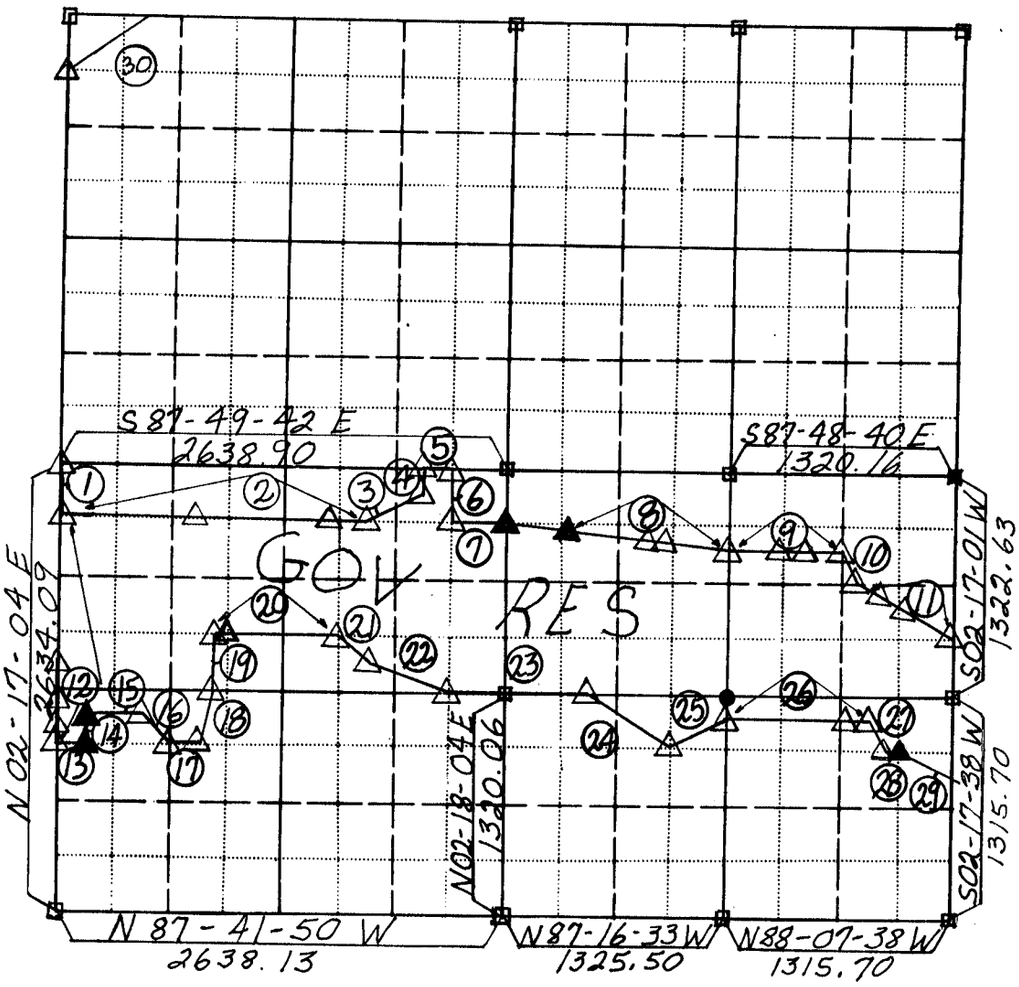

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2218-3		1136.62	654,503.04	1,399,470.00	△ with 30" I. rod
	1		S02-16-49 W	329.26			
		2218-4		1130.32	654,173.88	1,399,456.91	△ with 30" I. rod
	2		S87-49-50 E	805.09			
		2218-4A		1155.47	654,143.82	1,400,261.65	△
	2		S87-49-50 E	805.09			
		2218-4B		1157.30	654,112.71	1,401,065.60	△ with 30" I. rod
	2		S87-49-50 E	204.14			

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____
COUNTY, ARKANSAS

Field Book No. 68-B-7 TRANSIT, 68-B-8 CHAIN, 68-B-11 TRANSIT, 68-B-12 CHAIN, 68-B-4 LEVEL Date: _____

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 4

GN MN 01-10-40 07-13-45

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

PARTIAL BOUNDARY SURVEYS

BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 25, T 17 N, R 29 W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2218-5		1148.47	654,104.98	1,401,269.57	△ with 30" I. ROD
	3		N65-37-23 E	369.07			
		2218-6		1134.00	654,257.26	1,401,605.63	△ with 30" I. ROD
	4		N02-16-45 E	164.93			
		2218-7		1151.74	654,422.75	1,401,612.56	△ "
	5		S87-49-46 E	164.93			
		2218-8		1130.74	654,415.71	1,401,776.97	△ "
	6		S02-17-12 W	329.93			
		2218-9		1168.61	654,085.89	1,401,763.80	△ "
	7		S87-49-41 E	329.85			
		2218-10 2221-1		1173.73	654,073.39	1,402,093.38	▲ conc. mon.
	8		S80-08-57 E	356.36			
		2221-1A		1175.87	654,012.42	1,402,444.46	▲ conc. mon.
	8		S80-08-57 E	514.23			
		2221-1B		1192.64	653,924.45	1,402,951.08	△ with 30" I. ROD
	8		S80-08-57 E	84.88			
		2221-1C		1188.55	653,909.93	1,403,034.71	△ on steep bluff
	8		S80-08-57 E	366.11			
		2221-2 2301-1			653,848.82	1,403,394.84	△ 30" I rod on steep bluff
	9		S88-16-19 E	310.36			
		2301-1A		1189.29	653,836.64	1,403,718.65	△ with 30" I. rod
	9		S88-16-19 E	124.55			
		2301-1B		1174.56	653,832.92	1,403,843.13	△ "
	9		S88-16-19 E	230.33			
		2304-1		1134.71	653,826.05	1,404,073.33	△ with 18" I. rod
	10		S23-53-45 E	185.07			
		2304-2		1131.98	653,656.80	1,404,148.37	△ with 30" I. rod
	11		S58-43-01 E	120.65			
		2304-2A		1189.41	653,594.16	1,404,251.50	△ "
	11		S58-43-01 E	136.29			
		2304-2B		1210.12	653,523.41	1,404,368.00	△ "
	11		S58-43-01 E	410.25			
		2304-3		1207.49	653,310.42	1,404,718.69	△ with 24" I rod

SHEET 2 of 4

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 25, T 17 N, R 29 W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2219-2		1154.17	653,352.50	1,399,424.06	△ with 18" I. rod
	12		S02-17-06W	223.41			
		2219-2A		1188.28	653,129.27	1,399,415.15	△ "
	12		S02-17-06W	159.06			
		2219-2B		1190.37	652,970.34	1,399,408.81	△ "
	12		S02-17-06W	111.79			
		2219-3		1161.05	652,859.00	1,399,404.37	△ "
	13		S87-44-52E	164.91			
		2219-4		1146.76	652,852.52	1,399,569.15	▲ conc. mon
	14		N02-17-01E	164.65			
		2219-5		1139.64	653,017.04	1,399,575.71	▲ Conc. Mon
	15		S87-45-18E	329.81			
		2219-6		1136.84	653,004.12	1,399,905.27	△ with 30" I. rod
	16		S42-45-48E	233.00			
		2219-7		1136.48	652,833.06	1,400,063.47	△ with 30" I. rod
	17		N00-24-59E	153.70			
		2219-7A		—	652,834.18	1,400,217.17	
	17		N00-24-59E	7.26			
		2219-8		1123.94	652,834.23	1,400,224.43	△ with 30" I. rod Yielded to fence
	18		N16-16-51E	282.44			
		2219-9		1132.26	653,105.34	1,400,303.61	△ with 30" I. rod Yielded to fence
	19		N02-19-41E	385.28			
		2219-10= 2220-1		1127.19	653,490.30	1,400,319.26	△ with 30" I. rod Yielded to fence
	20		S88-00-20E	57.09			
		2220-1A		—	653,488.31	1,400,376.32	
	20		S88-00-20E	707.95			
		2220-2		1128.77	653,463.68	1,401,083.53	△ with 30" I. rod
	21		S42-59-29E	233.08			
		2220-3		1129.68	653,293.26	1,401,242.39	△ "
	22		S69-34-19E	521.18			
		2220-4		1130.01	653,111.44	1,401,730.56	△ "
	23		S87-14-16E	782.47			
		2220-5= 2300-1-1		1130.34	653,073.75	1,402,511.79	△ "
	24		S55-06-16E	622.84			

SHEET 3 of 4

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 25, T 17 N, R 29 W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2300-1-2			652,717.60	1,403,022.40	△with 30" I. rod
	25		N68-47-47E	343.44			
		2300-1-3 2303-2-1		1132.83	652,841.78	1,403,342.49	△ "
	26		S88-54-10E	700.01			
		2303-2-1A		1137.19	652,828.41	1,404,042.68	△ "
	26		S88-54-10E	139.87			
		2303-2-2		1131.08	652,825.73	1,404,182.58	△ "
	27		S29-21-14E	192.85			
		2303-2-3 2300-1-4		1139.19	652,657.55	1,404,277.16	△ "
	28		N89-52-44E	67.91			
		2300-1-5		1139.05	652,657.69	1,404,345.10	▲ Conc. Mon
	29		S57-09-42E	429.66			
		2300-1-5A		1139.31	652,424.59	1,404,706.29	▲ Conc. mon. in Sec 30, 17N, 28W
		2215-3A		1129.65	657,343.73	1,400,470.91	△ 30" I. rod in Sec. 24, T. 17N, R. 29W
	30		S59-33-02W	1038.12			
		2215-4		1128.68	656,817.59	1,399,575.86	△with 30" I. rod

SHEET 4 of 4

SWL FORM 136
REVISED FEB 66