PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS
CONTRACT NO. DACW03-67-0028

SEC. 28, T 20-N, R 29-W COUNTY BENTON

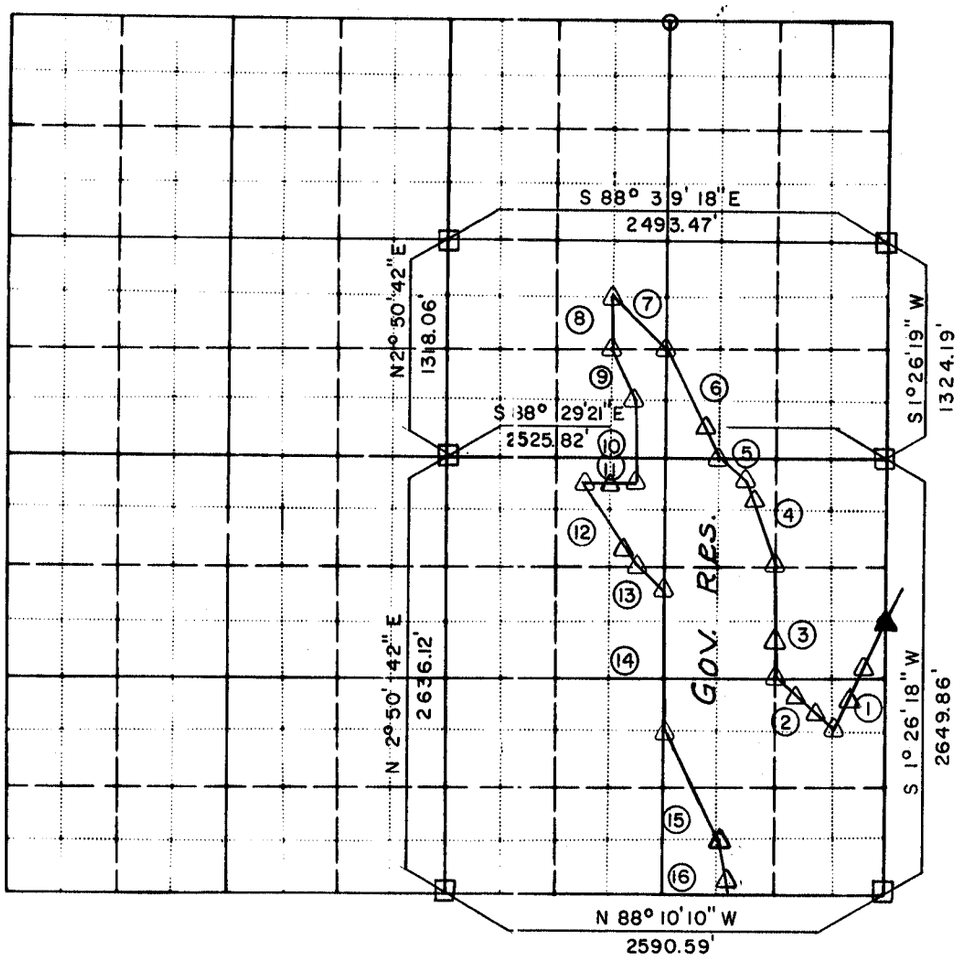

APPROX SCALE 1:12,000

TRACT NO	COURSE NO	MONUMENT NO	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		701-3		1135.93			CONCRETE POST WITH TYPE 1 CAP
			S46-45-24W	921.59			
		701-4 703-3		1181.78	748,692.57	1,392,929.72	" " "
	1		S27-19-42W	200.87			
		703-3A		1168.46			30" ROD + CAP TYPE 3
	1		S27-19-42W	327.94			
		703-3B		1159.35			30" ROD + CAP TYPE 3
	1		S27-19-42W	206.87			

Field Book No. TAKE LINE 66B-62 DIST. 66B-65 LEVELS 66B-71 COR. TIES 66B-70 Date: -66

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 28, T 20-N, R 28-W.

BENTON COUNTY, ARKANSAS

Lemuel Tull

LEMUEL TULL P.E. REG. NO. 1786

CRAFTON AND TULL CONSULTING ENGINEERS, INC.
UNDER THE SUPERVISION OF
U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 3

GN MN 1°11'35" 7°3'0" JAN.-67

LEGEND
- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 3
- ● FOUND I. P.
- ○ SET I. P.
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✱ OTHER

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 28, T-20-N, R-29-W COUNTY BENTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		703-4		1154.73	748,039.91	1,392,592.45	30" ROD + CAP TYPE 3
	2		N42-22-13W	165.37			
		703-4A		1178.58			17" ROD + CAP TYPE 3
	2		N42-22-13W	147.57			
		703-4B		1184.74			22" ROD + CAP TYPE 3
	2		N42-22-13W	147.57			
		703-5		1182.91	748,380.12	1,392,282.13	30" ROD + CAP TYPE 3
	3		N1-47-17E	275.73			
		703-5A		1207.30			" " "
	3		N1-47-17E	385.84			
		703-6 700-1		1222.98	749,041.36	1,392,302.78	30" ROD + CAP TYPE 3
	4		N15-54-42W	400.01			
		700-1A		1196.76			" " "
	4		N15-54-42W	120.08			
		700-2		1178.81	749,541.52	1,392,160.20	18" ROD + CAP TYPE 3
	5		N41-58-29W	227.87			
		700-3		1123.87	749,710.93	1,392,007.81	30" ROD + CAP TYPE 3
	6		N23-31-04W	235.71			
		700-3A		1129.19			" " "
	6		N23-31-04W	493.42			
		700-4		1130.20	750,379.49	1,391,716.88	22" ROD + CAP TYPE 3
	7		N41-38-40W	451.89			
		700-5		1129.51	750,717.18	1,391,416.59	30" ROD + CAP TYPE 3
	8		S2-18-59W	330.14			
		700-6		1128.11	750,387.31	1,391,403.27	" " "
	9		S23-19-18E	363.61			
		700-7		1124.87	750,053.41	1,391,547.22	" " "
	10		S2-13-45W	495.36			
		700-8		1127.42	749,558.42	1,391,527.97	" " "
	11		N88-28-07W	149.10			
		700-8A		1131.81			" " "
	11		N88-28-07W	167.14			
		700-9		1126.72	749,566.88	1,391,211.84	" " "
	12		S30-31-35E	431.82			

SHEET 2 of 3

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 28, T 20-N, R 29-W COUNTY BENTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		700-9A		1163.22			30" ROD + CAP TYPE 3
	12		S30-31-35E	152.63			
		700-10 703-7		1157.43	749,063.44	1,391,508.72	" " "
	13		S42-00-30E	228.08			
		703-8		1131.56	748,893.96	1,391,661.36	" " "
	14		S 2 · 08 · 27 W S 2 · 02 · 50 W	825.87 826.10			AS PER SEC. BREAKDOWN AS PER FIELD SURVEY
		703-9		1151.70	748,068.66	1,391,630.52	YIELD TO PREVIOUSLY SET POINT
	15		S 23 · 57 · 57 E S 23 · 55 · 38 E	733.57 734.27			AS PER SEC. BREAKDOWN AS PER FIELD SURVEY
		703-10		1130.51	747,398.34	1,391,928.50	30" ROD + CAP TYPE 3
	16		S11-02-58E	379.47			
		703-10A		1138.54			In Sec. 33
	16		S11-02-58E	296.50			
		703-11		1135.61	746,734.90	1,392,058.06	In Sec 33

SHEET 3 of 3

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS
CONTRACT NO. DACW03-67-0028

SEC. 28, T-20-N, R-29-W COUNTY BENTON

EASEMENTS

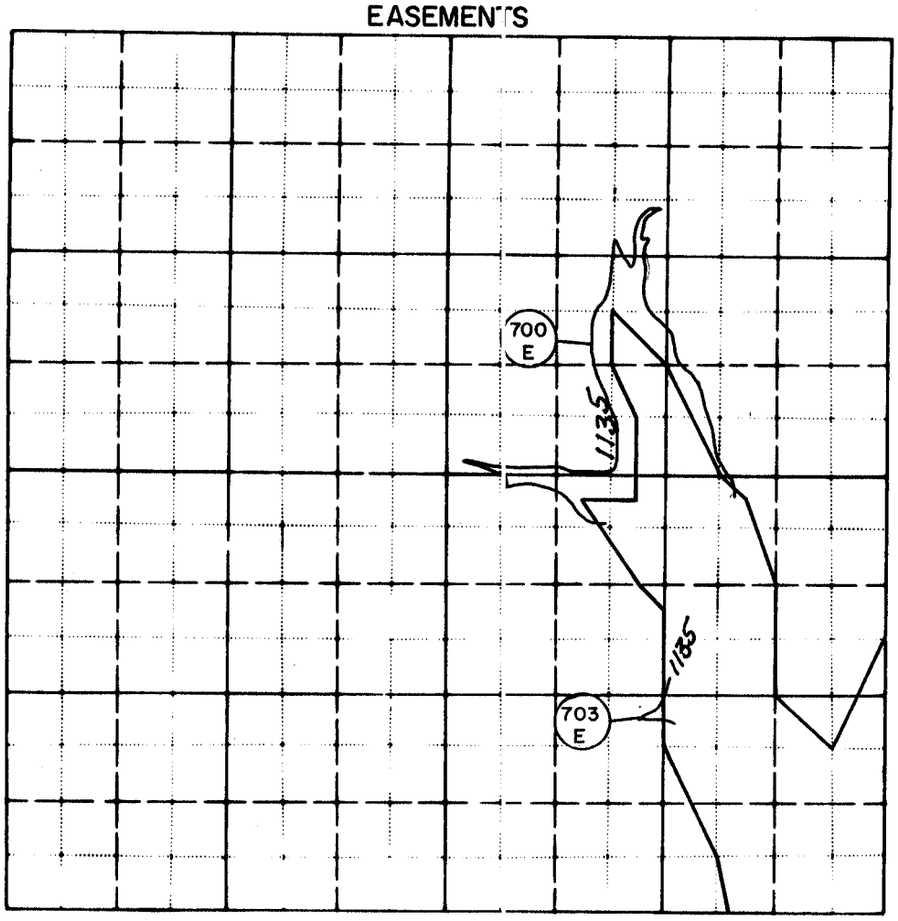

APPROX SCALE 1" = 2,000

TRACT NO	COURSE NO	MONUMENT NO	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS

Field Book No. 66B-73 Date: -66

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 28, T-20-N, R-28-W

BENTON
COUNTY, ARKANSAS

Lemuel Tull
LEMUEL TULL P.E. REG. NO. 1786

CRAFTON AND TULL CONSULTING ENGINEERS, INC.
UNDER THE SUPERVISION OF
U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 1

GN MN
1°11'35"
7°3'0"
JAN.-67

LEGEND
- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 3
- ● FOUND I. P
- ○ SET I. P
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✱ OTHER