BOUNDARY SURVEYS
CLEARWATER LAKE
BLACK RIVER, ARKANSAS & MISSOURI

SECTION 13 ,T 29 N ,R 2 E COUNTY REYNOLDS

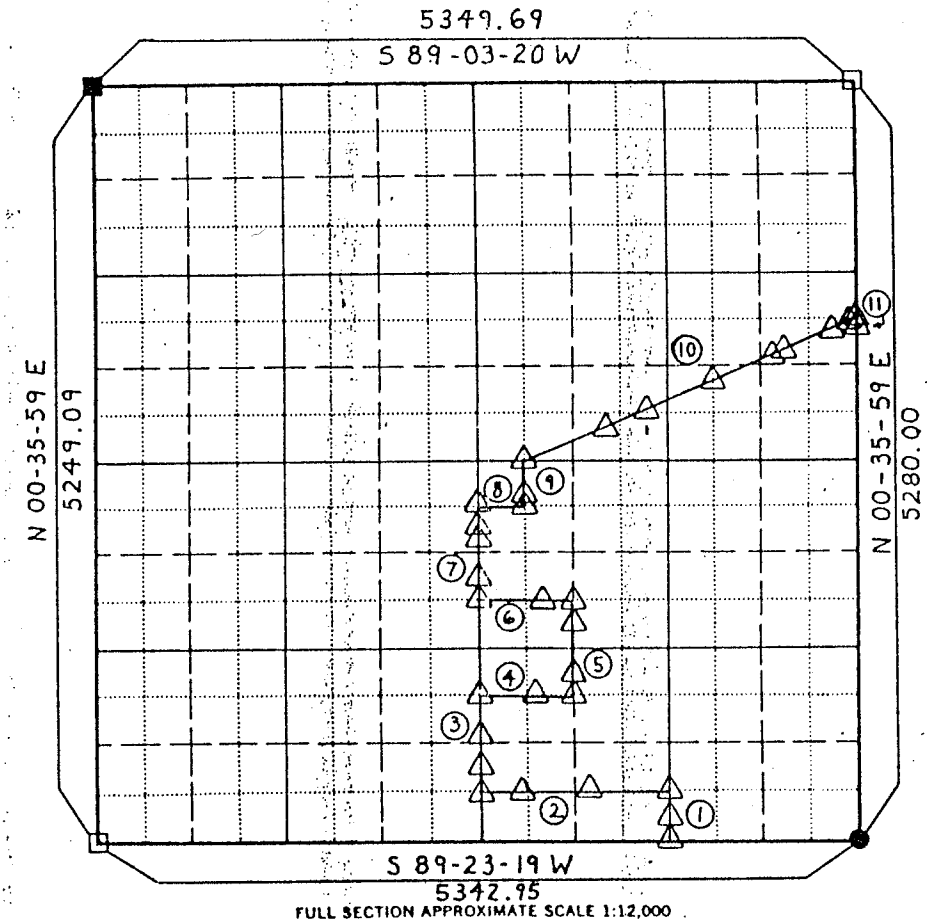

FULL SECTION APPROXIMATE SCALE 1:12,000

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	C-67-30			491,904.29	417,771.00	△ YIELD TO SUBD.
1		N 00-18-29 E	137.74			
	C-67-30A			491,042.01	417,771.11	△ 11
1		N 00-18-29 E	167.21			
	C-67-31			491,209.19	417,773.46	△ 11
2		S 88-56-00 W	576.07			
	C-67-31A			491,198.47	417,197.49	△ 11
2		S 88-56-00 W	519.65			

Field Book No. _____ Date: _____

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____ R _____.

_____

COUNTY, ARKANSAS

GN MN

LEGEND

- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 3
- ● FOUND I P
- ○ SET I. P
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✳ OTHER

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 OF 2

BOUNDARY SURVEYS
CLEARWATER LAKE
BLACK RIVER, ARKANSAS & MISSOURI

SECTION 13 , T 29 N , R 2 E COUNTY REYNOLDS

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	C-67-31B			491,188.79	416,677.93	△ YIELD TO SUBD.
2		S 88-56-00 W	181.68			
	C67-32 = C68-1			491,185.41	416,496.29	△ 11
3		N 01-54-58E	234.55			
	C-68-1A			491,419.83	416,504.13	△ 11
3		N 01-54-58E	162.94			
	C-68-1B			491,582.68	416,509.58	△ 11
3		N 01-54-58E	291.52			
	C-155-1			491,874.05	416,519.33	△ 11
4		N 88-56-16E	393.68			
	C-155-1A			491,881.35	416,912.94	△
4		N 88-56-16E	212.10			
	C-155-2			491,885.28	416,125.02	△
5		N 00-35-02E	131.63			
	C-155-2A			492,016.90	417,126.36	△
5		N 00-35-02E	400.52			
	C-155-2B			492,417.40	417,130.44	△
5		N 00-35-02E	126.41			
	C-155-3			492,543.81	417,131.73	△
6		S 89-15-41W	225.44			
	C-155-3A			492,540.90	416,906.31	△
6		S 89-15-41W	442.46			
	C-68-3 = C-155-4			492,535.20	416,463.88	△
7		N 00-34-19E	148.07			
	C-68-3A			492,683.26	416,465.36	△
7		N 00-34-19E	313.21			
	C-68-3B			492,996.45	416,468.49	△
7		N 00-34-19E	136.58			
	C-68-3C			493,133.03	416,469.85	△
7		N00-34-19E	60.22			
	C-156-1 = C-68-4			493,193.24	416,470.45	△
8		N 89-12-27E	333.96			
	C-156-2			493,197.86	416,804.38	△
9		N 00-33-36E	124.48			
	C-156-2A			493,322.34	416,805.60	△
9		N 00-33-36E	204.67			
	C-156-3			493,527.00	416,807.60	△
10		N 66-26-14E	632.08			
	C-156-3A			493,779.67	417,386.98	△

BOUNDARY SURVEYS
CLEARWATER LAKE
BLACK RIVER, ARKANSAS & MISSOURI

SECTION 13 , T 29 N , R 2 E COUNTY REYNOLDS

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
10		N 66-26-14 E	319.72			
	C-156-3B			493,907.48	417,680.04	△
10		N 66-26-14 E	491.95			
	C-156-3C			494,104.14	418,130.97	△
10		N 66-26-14 E	447.93			
	C-156-3D			494,283.20	418,541.55	△
10		N 66-26-14 E	36.03			
	C-156-3E			494,297.60	418,574.58	△
10		N 66-26-14 E	385.08			
	C-156-3F			494,451.54	418,927.55	△
10		N 66-26-14 E	182.71			
	C-156-3G			494,524.58	419,095.03	△
10		N 66-26-14 E	65.02			
	C-156-4			494,550.57	419,154.63	△
11		S 04-48-22 E	19.19			
	C-156-5			494,531.45	419,156.23	△