1 cap 4

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 12, T-7-N, R-22-W COUNTY LOGAN

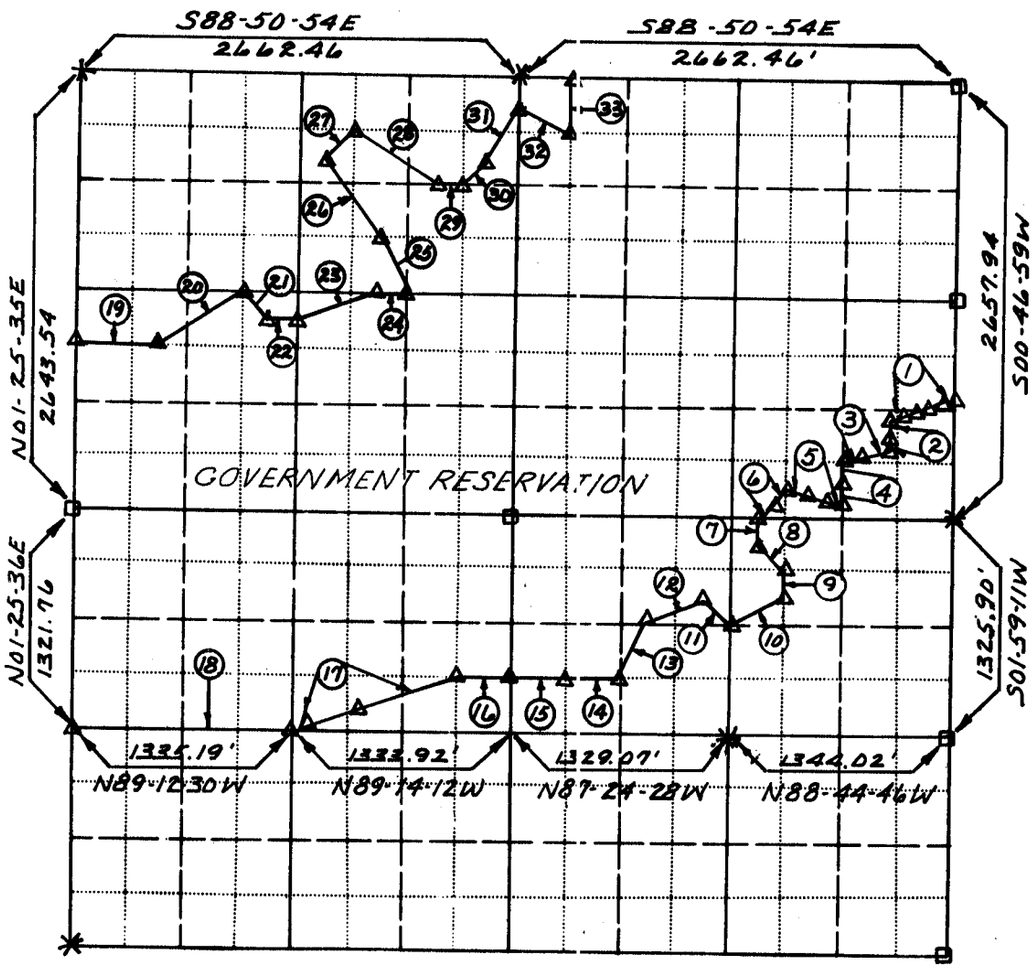

Revised April 1968

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		626-10= 611-1			347,021.06	1,618,349.05	In Lake
	1		S44-45-46W	19.69'			
		611-1A		340.26	347,007.08	1,618,335.18	
	1		S44-45-46W	101.51'			
		611-1B		352.90	346,935.01	1,618,263.70	
	1		S44-45-46W	216.36'			
		611-1C		345.69	346,781.39	1,618,111.35	
	1		S44-45-46W	108.01'			

Field Book No. 66D-4E5, 67D-6E7, 65A-20, 67D-10 Date: August 1967

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T_____, R_____.

_____

COUNTY, ARKANSAS

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 4

GN MN 0°-43'-04" 6°-05E

LEGEND

- ▲ · MONUMENT TYPE 1
- △ · MONUMENT TYPE 3
- ● · FOUND I. P.
- ○ · SET I. P.
- ■ · FOUND STONE
- □ · COMPUTED CORNER
- ✱ · OTHER

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 12, T. 7-N, R. 22-W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		611-1D		360.36	346,704.70	1,618,035.29	
	1		S44-45-46W	117.84'			
		611-2		352.12	346,621.02	1,617,952.31	
	2		S00-50-57W	100.05'			
		611-2A		352.23	346,520.98	1,617,950.83	
	2		S00-50-57W	59.95'			
		612-1		353.42	346,461.04	1,617,949.94	
	3		S73-07-19W	199.27'			
		612-1A		352.62	346,403.18	1,617,759.25	
	3		S73-07-19W	94.25'			
		612-2		347.68	346,375.82	1,617,669.06	
	4		S00-55-11W	137.35'			
		612-2A		361.87	346,238.49	1,617,666.86	
	4		S00-55-11W	111.22'			
		612-3		360.85	346,127.28	1,617,665.07	
	5		N74-30-43W	111.22'			
		612-3A		354.03	346,156.98	1,617,557.89	
	5		N74-30-43W	137.30'			
		612-3B		349.74	346,293.69	1,617,425.58	
	5		N74-30-43W	98.40'			
		612-4		337.62	346,219.92	1,617,330.75	
	6		S49-29-14W	91.92'			
		612-4A		354.49	346,160.21	1,617,260.87	
	6		S49-29-14W S48-21-15W	157.35' 154.25'			Comp. Bearing & Dist Field Bearing & Dist.
		612-5- 613-1			346,057.99	1,617,141.24	Tie Point
	7		S01-06-56W	168.08'			
		613-2			345,889.94	1,617,137.96	
	8		S45-50-04E	233.97'			
		613-3			345,726.93	1,617,305.79	
	9		S01-04-41W	167.59'			
		613-4			345,559.46	1,617,302.64	
	10		S65-23-21W	379.46'			
		613-5			345,401.54	1,616,957.88	
	11		N24-54-22W	165.00'			

SHEET 2 of 4

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 12, T 7-N, R 22-W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		613-6			345,551.19	1,616,888.39	
	12		S75-50-21W	368.19'			
		613-7			345,448.71	1,616,534.75	
	13		S34-51-38W	431.93'			
		613-8			345,094.29	1,616,287.87	
	14		N87-27-35W	332.50'			
		613-9			345,109.01	1,615,956.05	
	15		N88-29-04W	330.46'			
		613-10= 616-1			345,117.75	1,615,625.71	
	16		N89-12-07W	333.45'			
		616-2			345,122.40	1,615,292.29	
	17		S72-36-24W	635.91'			
		616-2A			344,932.31	1,614,685.46	
	17		S72-36-24W	393.91'			
		616-2B			344,814.56	1,614,309.56	
	17		S72-36-24W	26.51'			
		616-3			344,806.63	1,614,284.26	
	18		N89-12-30W	1,335.19'			
		616-4= 617-1			344,825.08	1,612,949.20	
		615-1= 617-8			347,137.45	1,613,006.81	
	19		S89-00-16E	499.73'			
		615-2		347.31	347,128.77	1,613,506.46	Concrete Mon.
	20		N57-41-06E	600.70'			
		615-3		342.68	347,449.89	1,614,014.12	Concrete Mon.
	21		S44-04-44E	233.64'			
		615-4			347,282.04	1,614,176.65	
	22		S88-59-20E	166.56'			
		615-5			347,279.10	1,614,343.19	
	23		N72-48-02E	527.08'			
		615-6			347,434.96	1,614,846.70	
	24		S88-58-24E	166.54'			

SHEET 3 of 4

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 12, T 7-N, R 22-W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		615-7 = 614-1			347,431.98	1,615,013.21	
	25		N25-31-27W	368.27'			
		614-2			347,764.31	1,614,854.53	
	26		N32-41-09W	594.60'			
		614-3			348,264.75	1,614,533.43	
	27		N46-31-36E	234.75'			
		614-4			348,426.26	1,614,703.78	
	28		S55-24-30E	597.00'			
		614-5			348,087.33	1,615,195.24	
	29		S88-54-39E	166.47'			
		614-6			348,084.16	1,615,361.68	
	30		N46-32-49E	234.57'			
		614-7			348,245.49	1,615,531.97	
	31		N28-07-24E	369.29'			
		614-8			348,571.18	1,615,706.04	
	32		S62-28-57E	371.31'			
		614-9			348,399.63	1,616,035.34	
	33		N01-21-13E	330.50'			
		614-10 = 604-1			348,728.94	1,616,042.60	
		614-9					
	33		N01-15-46E	329.39'		By Sectional	Breakdown
		614-10 = 604-1					

SHEET 4 of 4

SWL FORM 136
REVISED FEB. 66