PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 21, T - 8-N, R - 20W COUNTY POPE

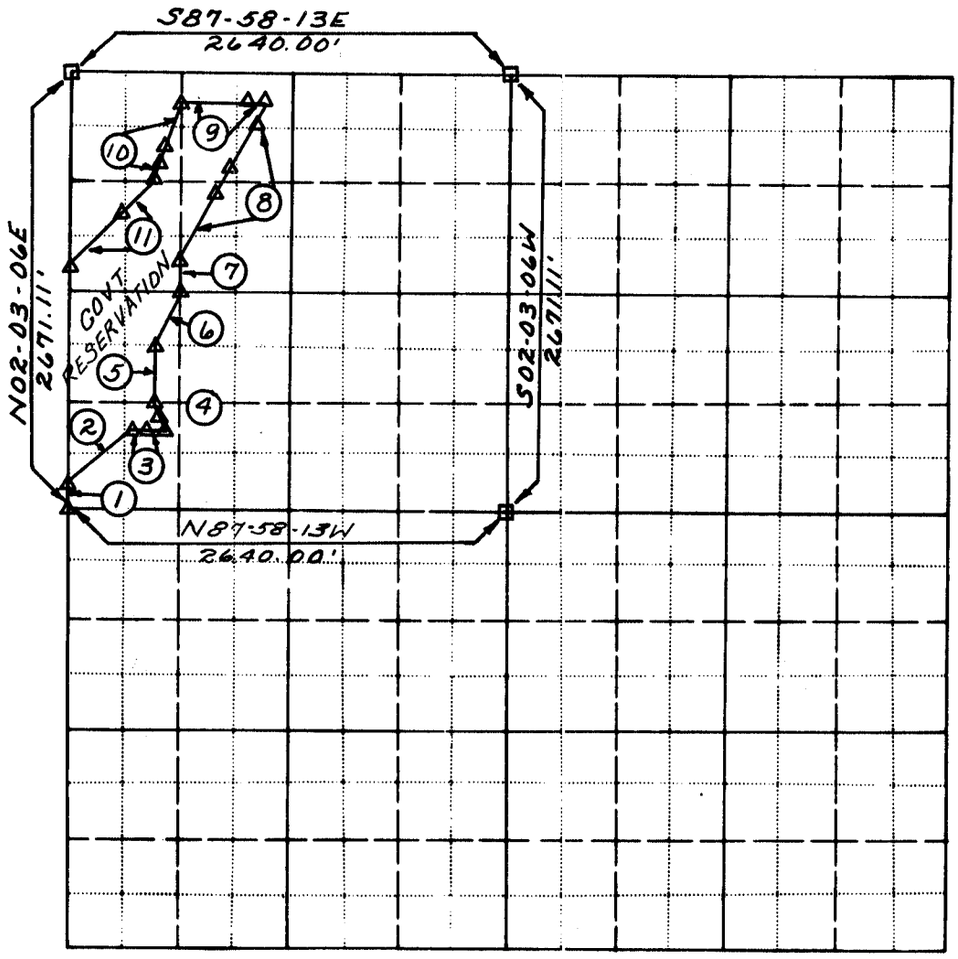

FULL SEC APPROX SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		243-2		343.20	364,541.53	1,660,958.14	
	1		N02-03-08E	166.95'			
		242-1		343.78	364,708.37	1,660,964.12	
	2		N49-41-52E	487.14'			
		244-2= 212-1		341.61	365,023.46	1,661,335.63	
	3		S87-58-13E	226.82'			
		212-1A		349.32	365,015.43	1,661,562.31	
	3		S87-58-13E	27.72'			

Field Book No. 67D11&12 Date: Sept. 67

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____

COUNTY, ARKANSAS

_____

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 2

GN MN
0°-43'-04" 6°-05E

LEGEND

- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 3
- ● FOUND I. P.
- ○ SET I. P.
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✱ OTHER

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 21, T - 8-N, R -20-W COUNTY POPE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		212-2= 242-3		344.08	365,014.45	1,661,590.01	
	4		N32-37-54W	102.78'			
		242-3A		347.80	365,101.00	1,661,534.59	
	4		N32-37-54W	107.29'			
		242-4		346.18	365,191.35	1,661,476.74	
	5		N02-03-03E	333.88'			
		242-5		340.49	365,525.02	1,661,488.69	
	6		N28-20-39E	372.50'			
		242-6		340.14	365,852.86	1,661,665.54	
	7		N02-03-11E	166.94'			
		242-7		339.02	366,019.69	1,661,671.52	
	8		N26-30-46E	450.34'			
		242-7A		340.77	366,422.67	1,661,872.55	
	8		N26-30-46E	191.47'			
		242-7B		342.25	366,594.00	1,661,958.01	
	8		N26-30-46E	339.15'			
		242-7C		341.93	366,897.48	1,662,109.42	
	8		N26-30-46E	119.68'			
		242-8		349.08	367,004.58	1,662,162.84	
	9		N87-58-13W	62.73'			
		242-8A		342.08	367,006.80	1,662,100.15	
	9		N87-58-13W	393.02'			
		242-9		342.52	367,020.72	1,661,707.38	
	10		S20-17-03W	373.84'			
		242-9A		341.57	366,670.06	1,661,577.78	TYPE III
	10		S20-17-03W	99.76'			
		242-9B		341.~~25~~ 92	366,576.49	1,661,543.20	TYPE III REBUT 11/99
	10		S20-17-03W	53.78'			
		242-10		340.96	366,526.05	1,661,524.55	TYPE III
	11		S46-42-19W	271.36'			
		242-10A		350.25	366,339.96	1,661,327.04	TYPE III
	11		S46-42-19W	432.95'			
		242-11= 243-4		350.87	366,043.07	1,661,011.93	

SHEET 2 of 2

SWL FORM 136
REVISED FEB. 66