BOUNDARY SURVEYS
LAKE DARDANELLE
ARKANSAS RIVER, ARKANSAS

SECTION 4, T 8N, R 26W COUNTY FRANKLIN

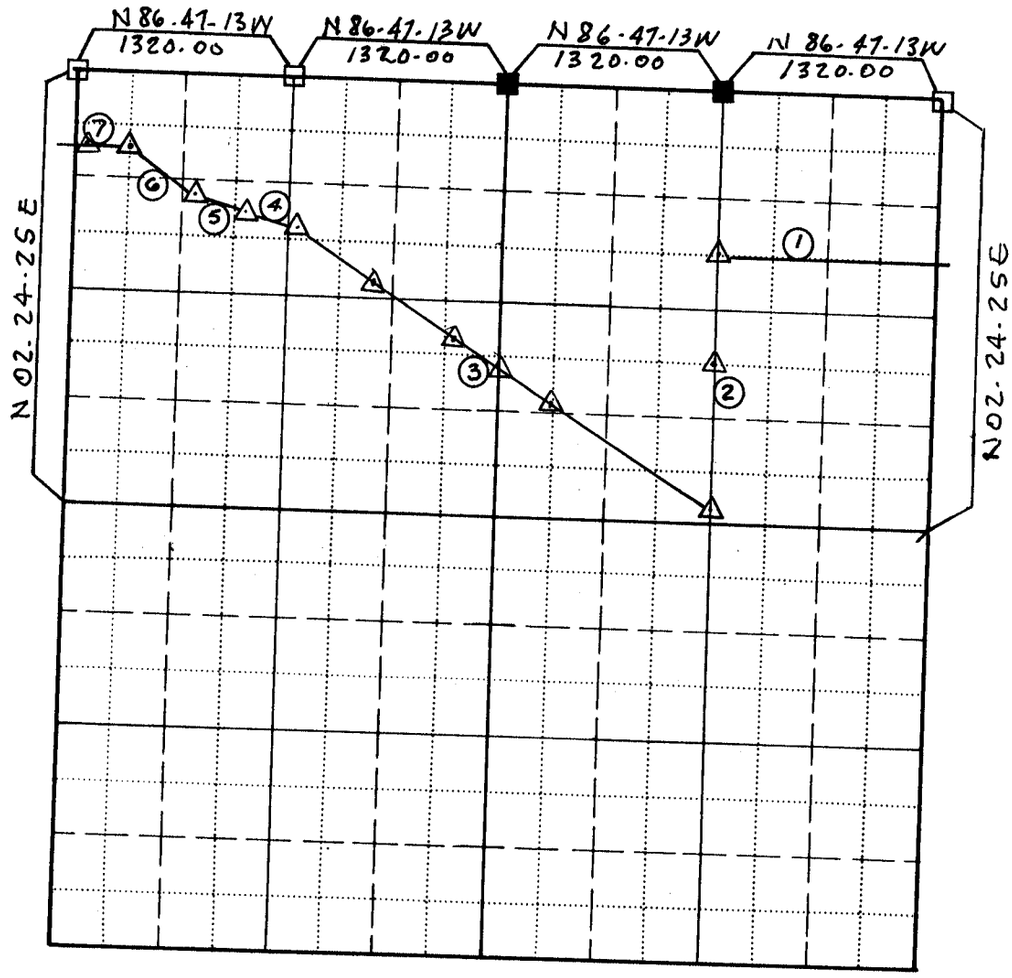

FULL SECTION APPROXIMATE SCALE 1:12,000

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	3014.1= 3015.4			389,327.30	1,474,702.68	NOT SET IN FIELD
1		N 86-58-07 W	1420.23			
	3014-2		356.06	389,402.40	1,473,284.44	TYPE III
2		S 02-18-33 W	846.00			
	3014.2A		363.19	388,557.98	1,473,250.75	TYPE III
2		S 02-18-33 W	687.00			
	3014-3= 3011-1		364.98	387,872.27	1,473,223.39	TYPE III
3		N 55-10-45W	1200.00			

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____
COUNTY, ARKANSAS

_____ _____
SURVEYOR REG. NO.

Field Book No. 73D-10-14 Date: MAY 1973
73D-10 LEVELS

GN MN

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS
SHEET 1 OF 2

LEGEND
- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 2
- ● FOUND I. P.
- ○ SET I. P.
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✳ OTHER

BOUNDARY SURVEYS
LAKE DARDANELLE
ARKANSAS RIVER, ARKANSAS

SECTION 4 , T 8N , R 26 W COUNTY FRANKLIN

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	3011-1A		366.57	388,557.33	1,472,237.82	TYPE I
3		N 55·10·38W	377.80			
	3011-1B		365.59	388,773.01	1,471,927.54	TYPE I
3		N 55·10·38W	600.00			
	3011-1C		365.43	389,116.59	1,471,435.35	TYPE III
3		N 55·10·38W	300.00			
	3011-1D		366.51	389,288.35	1,471,189.25	TYPE III
3		N 55·10·38W	661.13			
	3011·2		362.37	389,666.87	1,470,646.90	TYPE III
4		N 72·21.00W	341.40			
	3011-3 = 3010·1		366.94	389,768.58	1,470,320.88	TYPE III
5		N 72.49.59W	341.16			
	3010·2		362.09	389,869.37	1,469,994.82	TYPE III
6		N 53-17-13W	598.76			
	3010·3		364.04	390,227.47	1,469,514.67	TYPE III
7		N 86-42-47W	103.00			
	3010-3A		364.43	390,233.41	1,469,411.82	TYPE III
7		N 86·42.47W	62.00			
	3010·4		353.69	390,236.98	1,469,349.90	TYPE III

SHEET 2 OF 2

SWL FORM 136
REVISED OCT. 1971