PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 22, T -8-N, R -26-W COUNTY LOGAN

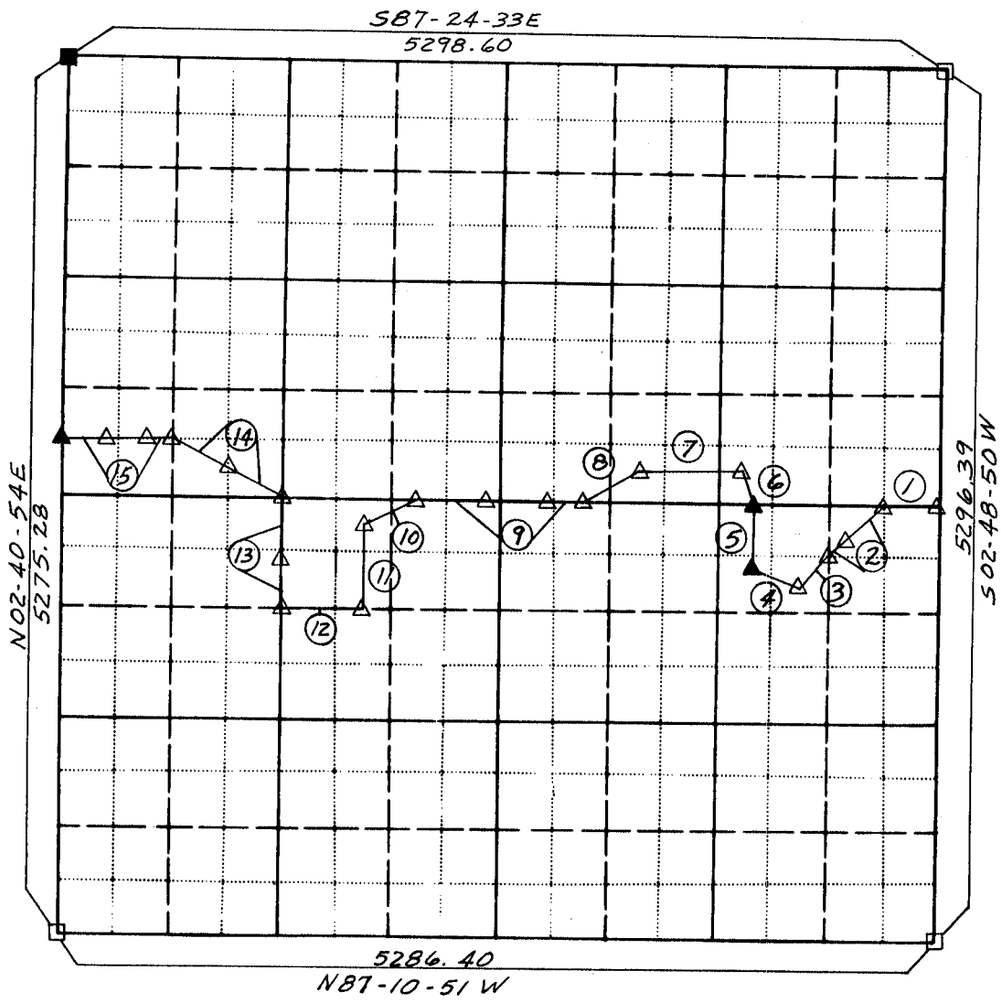

FULL SEC APPROX SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		3141-12		375.68	373,564.75	1,481,909.89	
	1		N87-16-35W	330.78			
		3141-13 = 3139-1		371.06	373,580.45	1,481,579.57	
	2		N47-45-06W	299.19			
		3139-1A		368.69	373,379.33	1,481,358.13	
	2		N47-45-06W	169.04			
		3139-2 = 3138-1		361.30	373,265.69	1,481,233.02	
	3		N47-45-06W	234.04			

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 22, T-8-N, R-26W.

COUNTY, ARKANSAS

Field Book No. 71D-13,E14 Date: 1971
Level Book No. 71D-15

GN MN
0°57'38" 6°46"04"

LEGEND

- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 3
- ● FOUND I. P.
- ○ SET I. P.
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✱ OTHER

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 2

BOUNDARY SURVEYS
LAKE DARDANELLE
ARKANSAS RIVER, ARKANSAS

SECTION 22 , T-8-N , R-26-W COUNTY LOCAN

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	3138-2		361.00	373,108.05	1,481,059.71	
4		N72-17-39W	294.52			
	3138-3		367.02	373,197.63	1,480,779.16	
5		N02-47-21E	420.00			
	3138-4= 3141-14		3138-4	373,616.87	1,480,799.61	
6		N12-49-38W	171.64			
	3141-15		364.72	373,784.13	1,480,761.54	
7		N87-18-38W	661.60			
	3141-16		366.60	373,815.24	1,480,100.59	
8		S62-23-22W	327.42			
	3141-17= 3135-1		366.69	373,663.46	1,479,810.32	
9		N87-17-38W	262.43			
	3135-1A		371.19	373,675.88	1,479,548.16	
9		N87-17-38W	378.05			
	3135-1B		361.11	373,693.78	1,479,170.49	
9		N87-17-38W	400.18			
	3134-2		365.74	373,712.74	1,478,770.72	
10		S66-11-22W	369.74			
	3134-3		359.61	373,563.47	1,478,432.29	
11		S02-43-22W	495.24			
	3134-4		363.10	373,068.48	1,478,408.66	
12		N87-16-38W	496.03			
	3134-5		362.79	373,092.14	1,477,913.13	
13		N02-41-52E	295.02			
	3134-5A		362.06	373,386.65	1,477,927.08	
13		N02-41-52E	370.05			
	3134-6= 3132-1		368.11	373,756.04	1,477,944.57	
14		N61-09-07W	345.16			
	3132-1A		377.08	373,922.62	1,477,642.34	
14		N61-09-07W	391.90			
	3132-2		365.08	374,111.77	1,477,299.18	
15		N87-19-07W	157.33			
	3132-2A		401.23	374,119.17	1,477,142.01	
15		N87-19-07W	183.93			
	3132-2B		400.69	374,127.83	1,476,958.26	
15		N87-19-07W	320.41			
	3132-3= 3130-1-1		366.79	374,142.92	1,476,638.17	

SHEET 2 OF 2

SWL FORM 136
REVISED OCT. 1971