PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 21, T 22 N., R 23 W. COUNTY STONE

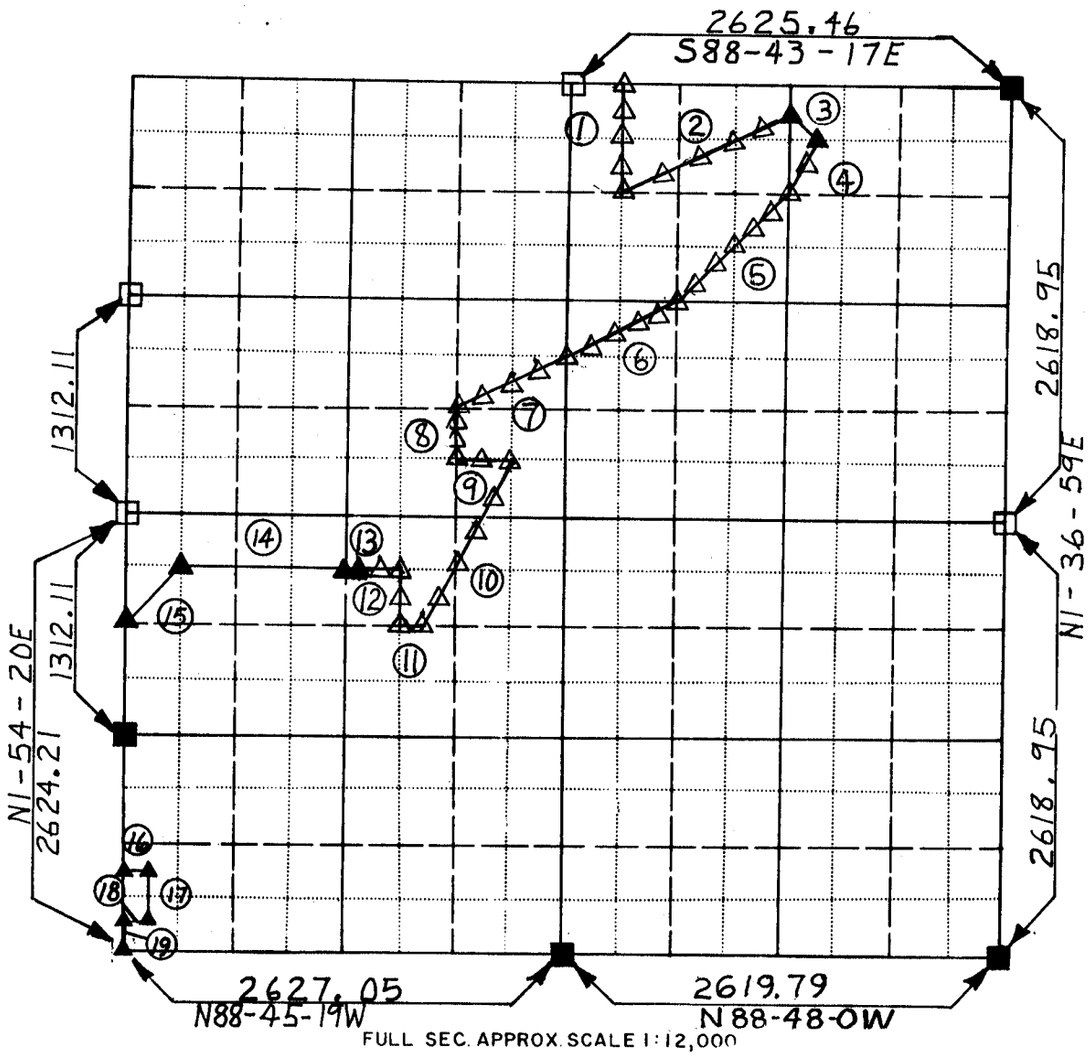

FULL SEC. APPROX. SCALE 1:12,000

MO. CENTRAL ZONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		609-6		1022.51	281,357.95	227,799.56	
	1		S1-33-31W	239.92			
		609-6A		1070.38	281,118.12	227,793.03	
	1		S1-33-31W	91.22			
		609-6B		1060.91	281,026.93	227,790.55	
	1		S1-33-31W	208.06			
		609-6C		989.08	280,818.94	227,784.89	
	1		S1-33-31W	115.53			

Field Book No. TR5, TR7, TR9 Date: 1971

LEVEL BOOK 71 TR11

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 21, T 22 N., R 23 W.

STONE COUNTY, MISSOURI

MISSOURI REG. NO. 1409

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 5

GN MN 0°32'54" 6°13'

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 21, T 22 N., R 23 W. COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		642-3-1		939.94	280,703.46	227,781.75	
	2		N64-53-15E	279.85			
		642-3-1A		948.40	280,822.23	228,035.15	
	2		N64-53-15E	204.22			
		642-3-1B		939.89	280,908.90	228,220.06	
	2		N64-53-15E	167.38			
		642-3-1C		929.21	280,979.94	228,371.62	
	2		N64-53-15E	179.32			
		642-3-1D		942.92	281,056.04	228,533.99	
	2		N64-53-15E	265.45			
		642-3-2		944.32	281,168.70	228,774.35	YIELD 1" BOLT
	3		S43-53-30E	233.48			
		642-3-3		1053.63	281,000.44	228,936.23	YIELD 1" BOLT
	4		S28-27-45W	177.23			
		642-3-3A		1052.93	280,844.63	228,851.76	
	4		S28-27-45W	191.45			
		642-2-4		1035.06	280,676.32	228,760.52	YIELD 1" BOLT
	5		S46-37-35W	174.56			
		642-2-4A		992.25	280,556.44	228,633.63	
	5		S46-37-35W	145.63			
		642-2-4B		996.49	280,456.43	228,527.77	
	5		S46-37-35W	145.08			
		642-2-4C		1028.86	280,356.80	228,422.31	
	5		S46-37-35W	155.27			
		642-2-4D		1034.41	280,250.17	228,309.44	
	5		S46-37-35W	162.50			
		642-2-4E		1085.77	280,138.57	228,191.32	
	5		S46-37-35W	148.67			
		609-11		1114.59	280,036.47	228,083.27	YIELD-SQ. PIN
	6		S64-53-40W	139.51			
		609-11A		1103.54	279,977.28	227,956.94	
	6		S64-53-40W	166.58			
		609-11B		1075.01	279,906.60	227,806.10	
	6		S64-53-40W	154.26			

SHEET 2 of 5

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 21, T 22 N., R 23 W. COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		609-11C		1069.52	279,841.15	227,666.41	
	6		S64-53-40W	115.68			
		609-11D		1052.36	279,792.07	227,561.66	
	6		S64-53-40W	148.53			
		652-1		1015.52	279,729.04	227,427.16	
	7		S64-41-04W	152.18			
		652-1A		1038.21	279,663.97	227,289.59	
	7		S64-41-04W	244.51			
		652-1B		1039.38	279,559.42	227,068.56	
	7		S64-41-04W	213.60			
		652-1C		1020.80	279,468.08	226,875.47	
	7		S64-41-04W	120.24			
		652-2		998.56	279,416.67	226,766.78	
	8		S1-38-22W	164.06			
		652-2A		1013.74	279,252.67	226,762.09	
	8		S1-38-22W	81.66			
		652-2B		1006.98	279,171.04	226,759.75	
	8		S1-38-22W	80.65			
		609-15		988.41	279,090.43	226,757.45	
	9		S88-42-26E	228.72			
		609-15A		1073.37	279,085.27	226,986.11	
	9		S88-42-26E	97.38			
		609-16		1100.82	279,083.07	227,083.46	
	10		S28-02-10W	255.63			
		609-16A		1014.67	278,857.44	226,963.31	
	10		S28-02-10W	208.31			
		609-16B		1018.38	278,673.57	226,865.40	
	10		S28-02-10W	257.67			
		609-16C		993.80	278,446.14	226,744.29	
	10		S28-02-10W	104.26			
		609-16D		1032.31	278,354.12	226,695.28	
	10		S28-02-10W	275.24			
		609-17		1062.84	278,111.17	226,565.91	
	11		N88-43-09W	163.43			

SHEET 3 of 5

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 21, T 22 N, R 23W COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		609-18		1110.12	278,114.83	226,402.52	
	12		N01-41-14E	163.06			
		609-18A		1063.22	278,277.82	226,407.32	
	12		N01-41-14E	163.65			
		609-19		1010.87	278,441.40	226,412.14	
	12		N86-53-50W	68.53			
		609-19A		1025.64	278,445.11	226,343.71	
	13		N86-53-50W	86.09			
		609-19B		1033.81	278,449.77	226,257.74	
	13		N86-53-50W	163.31			
		MON.#1		1026.47	278,458.61	226,094.68	YIELD MILL CREEK-CORPS MONUMENT
	14						
		MON.#2					
	15						
		MON.#3					
		MON.#8					In Sec. 20
	16						
		MON.#9					
	17						
		MON.#10					
	18						
		MON.#11					
	19						
		905-1		999.18	276,182.81	224,703.17	
		642-3-1			280,703.46	227,781.75	S.B.
	2		N64-49-30E	1102.30			
		642-3-2			281,172.36	228,779.35	S.B.
	3		S43-38-15E	231.14			
		642-3-3			281,005.08	228,938.86	S.B.
	4		S28-08-24W	366.96			

Set by local positions. Will be changed to T.M. System when fied.

S.B. = AS COMPUTED BY SECTIONAL BREAKDOWN

SHEET 4 of 5

SWL FORM 136
REVISED FEB 66

PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 21, T 22N, R 23W. COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		642-2-4			280,681.50	228,765.79	S.B.
	5		S46-29-09W	929.09			
		609-11			280,041.65	228,091.87	S.B.
	6		S64-48-46W	734.55			
		652-1			279,729.04	227,427.16	S.B.
		609-19			278,441.40	226,412.14	S.B.
	13		N88-43-31E	326.61			
		609-20			278,448.67	226,085.61	S.B.

S.B. = AS COMPUTED BY SECTIONAL BREAKDOWN

SHEET 5 of 5

SWL FORM 136
REVISED FEB. 66