PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 17, T 17N, R 28 W COUNTY WASHINGTON

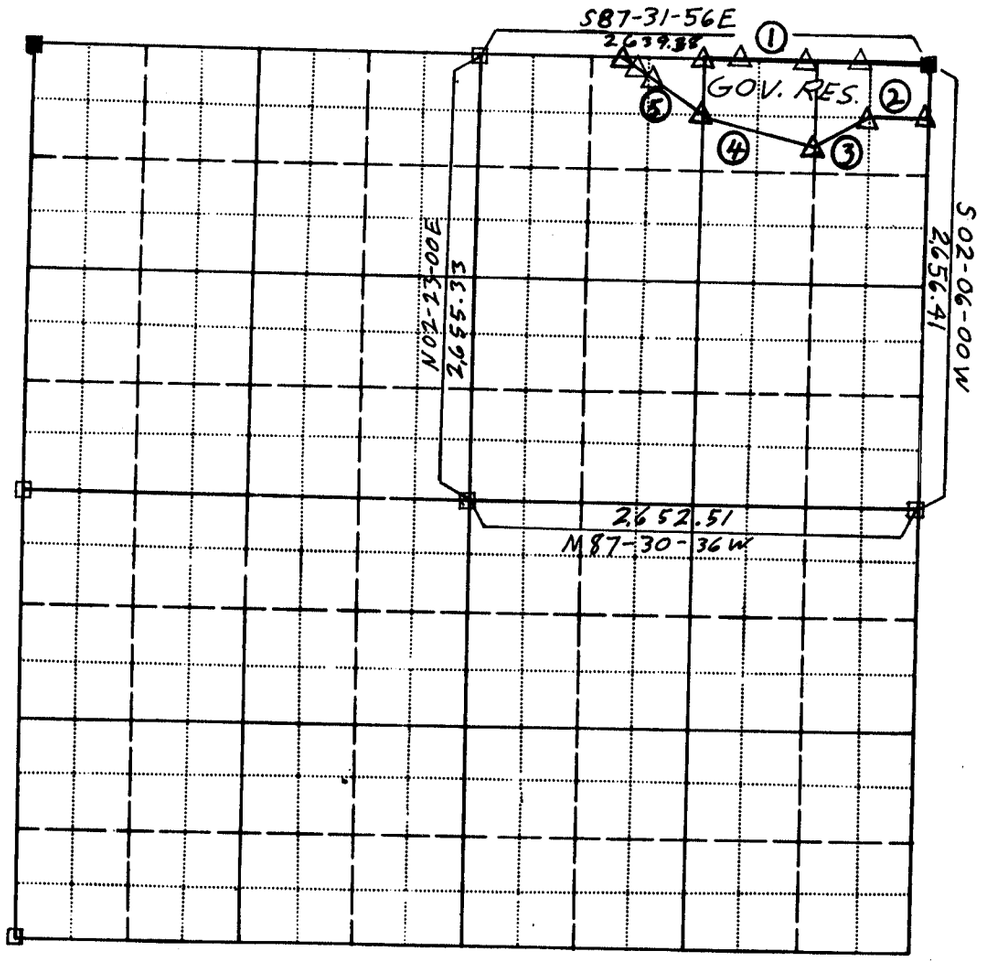

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2129-3 = 2131-1		1127.62	667,079.70	1,414,592.08	
	1		S87-30-12E	244.66			
		2131-1A		1156.10	667,069.10	1,414,836.51	
	1		S87-30-12E	367.08			
		2131-1B		1160.64	667,052.30	1,415,203.24	
	1		S87-30-12E	375.45			
		2131-1C		1173.19	667,035.49	1,415,578.33	
	1			332.51			

Field Book No. ~~67-B-116~~ TRANSIT 67-B-117 CHAIN 67-B-118 LEVEL Date: JAN 1968

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____

COUNTY, ARKANSAS

_____

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 2

GN MN 1°10' 7°04'E

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

PARTIAL BOUNDARY SURVEYS

SEC. 17, T -17-N, R -28-W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2131-1C		1173.19	667,035.49	1,415,578.33	
	1		S87-30-12E	332.51			
		2131-2 = 2132-1 = E-2			667,020.63	1,415,910.84	
		2132-5 = 2131-3		1125.68	666,688.56	1,415,898.81	
	2		N87-21-21W	330.13			
		2131-4		1127.66	666,703.78	1,415,569.23	
	3		S65-53-43W	368.74			
		2131-5		1141.17	666,553.30	1,415,232.92	
	4		N73-16-20W	681.64			
		2131-6 = 2130-1		1146.31	666,749.41	1,414,580.38	
	5		N53-35-30W	367.53			
		2130-1A		1191.95	666,967.55	1,414,284.59	
	5		N53-35-30W	120.89			
		2130-1B		1210.00	667,039.30	1,414,187.30	
	5		N53-35-30W	50.80			
		2130-1C		1201.13	667,069.45	1,414,146.42	
	5		N53-35-30W	57.80			
		2130-2 = 2129-4		1177.62	667,103.73	1,414,099.94	

SHEET 2 of 2

SWL FORM 136
REVISED FEB. 66