PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 22, T 17, R 29 COUNTY WASHINGTON

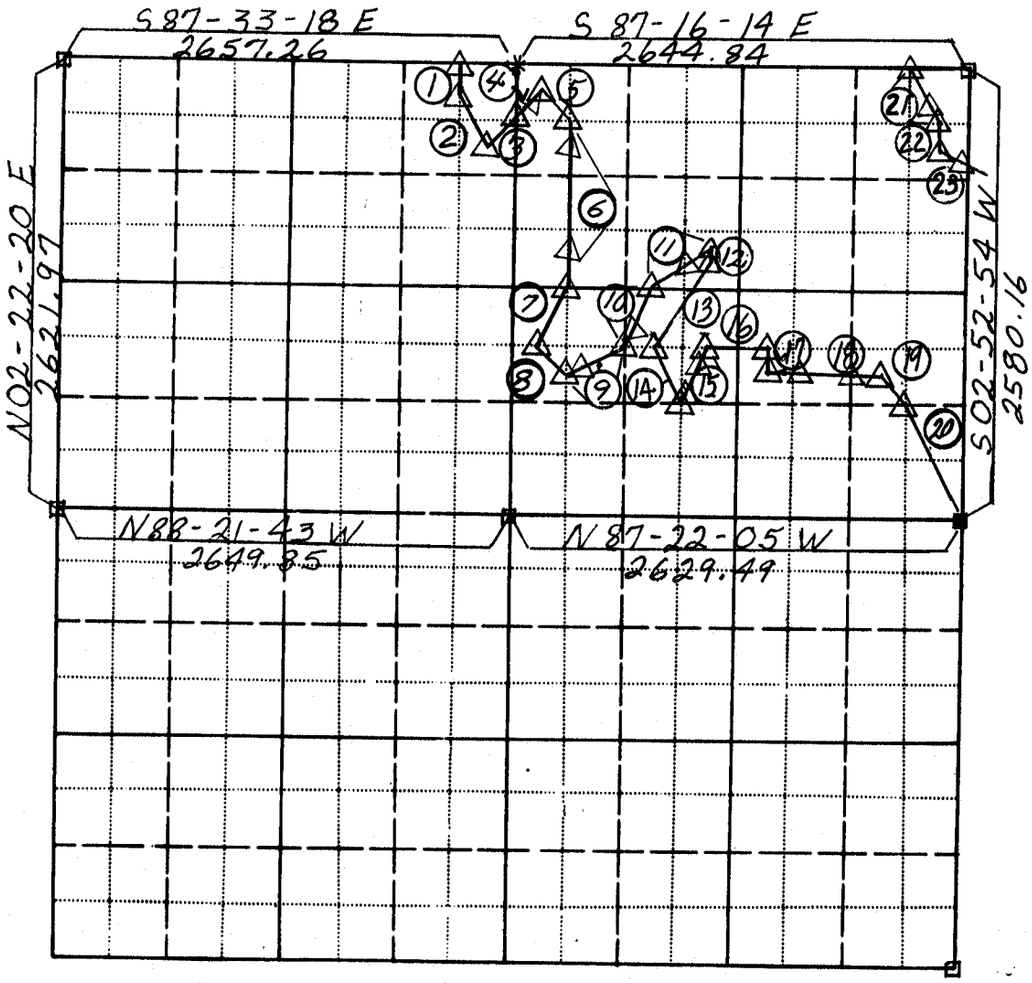

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2200-1		1127.84	662,736.69	1,391,565.70	
	1		S02-30-42W	161.84			
		2200-2		1127.95	662,575.26	1,391,557.09	
	2		S24-40-33E	363.16			
		2200-3		1128.28	662,245.40	1,391,708.64	
	3		N48-11-59E	232.12			
		2200-4 2201-1		1130.20	662,400.16	1,391,881.73	
	4		N48-17-53E	145.23			

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____
COUNTY, ARKANSAS

Field Book No. 68B-6 TRANSIT Date: JUN-SEP 1968
68B-5 CHAIN
68B-2 LEVEL
68B-4 LEVEL

GN MN
1°10'
7°04'E

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 4

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 22, T 17 N, R 29 W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2201-1A		1129.41	662,496.81	1,391,990.20	
	4		N48-17-53E	85.48			
		2201-2		1123.03	662,553.68	1,392,054.02	
	5		N42-59-14E	231.35			
		2201-3					POINT NOT SET IN WATER
	6		S02-36-48W	172.60	662,384.55	1,392,211.80	
		2201-3A		1130.24	662,212.13	1,392,203.93	
	6		S02-36-48W	617.37			
		2201-3B		1141.58	661,595.68	1,392,175.82	
	6		S02-36-48W	179.05			
		2201-4		1126.83	661,416.90	1,392,167.65	
	7		S29-39-39W	362.36			
		2201-5		1129.17	661,102.14	1,391,988.41	
	8		S42-52-57E	230.84			
		2201-6 2202-2-1		1131.31	660,933.05	1,392,145.44	
	9		N66-36-08E	113.48			
		2202-2-1A		1137.94	660,978.13	1,392,249.61	
	9		N66-36-08E	253.17			
		2202-2-2		1136.65	661,078.67	1,392,482.01	
	10		N22-16-44E	137.72			
		2202-2-2A		1138.30	661,206.16	1,392,534.24	
✓	10		N22-17-44E	204.91			
		2202-2-3		1135.62	661,395.85	1,392,612.01	
	11		N59-06-02E	273.41			
		2202-2-3A		1132.55	661,536.30	1,392,846.66	
	11		N59-06-02E	182.89			
		2202-2-4 2202-1-1		1125.72	661,630.24	1,393,003.64	
	12		S02-47-07W	91.63			
		2202-1-2		1124.60	661,538.76	1,392,999.19	
	13		S37-00-53W	585.77			
		2202-1-3		1129.03	661,071.20	1,392,646.67	
	14		S24-14-51E	362.46			
		2202-1-4 2203-1		1134.66	660,740.85	1,392,795.47	
	15		N29-49-44E	75.87			

SHEET 2 of 4

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 22, T 17 N, R 29 W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		2203-1A		1145.35	660,806.70	1,392,833.21	
	15		N29-49-44 E	199.90			
		2203-1B		1125.26	660,980.20	1,392,932.67	
	15		N29-49-44E	86.68	661,055.40	1,392,975.77	
		2203-2		~~WORK FOR STATION~~			POINT NOT SET IN WATER
	16		S87-11-00E	61.91			
		2203-2A		1136.33	661,052.34	1,393,037.66	
	16		S87-11-00E	208.79			
		2203-2B		1140.65	661,042.08	1,393,246.20	
	16		S87-11-00E	58.71			
		2203-3			661,039.21	1,393,304.83	POINT NOT SET IN WATER
	17		S02-53-44 W	161.38			
		2203-4		1124.45	660,878.07	1,393,296.69	
	18		S87-09-00E	200.63			
		2203-4A		1145.74	660,868.12	1,393,497.07	
	18		S87-09-00E	330.17			
		2203-4B		1150.21	660,851.71	1,393,826.83	
	18		S87-09-00E	127.79			
		2203-5		1131.64	660,845.34	1,393,954.46	
	19		S42-38-28E	230.14			
		2203-6		1130.00	660,676.10	1,394,110.31	
	20		S24-26-19E	719.55			
		2203-7		1141.58	660,021.28	1,394,407.87	
		2109-1-9		1133.14	662,613.38	1,394,210.73	
	21		S24-22-52 E	267.79			
		2109-1-9A		1129.66	662,369.47	1,394,321.27	
	21		S24-22-52 E	93.93			
		2109-1-10		1134.11	662,284.07	1,394,359.98	
	22		S02-46-19 W	161.41			
		2109-1-11		1124.76	662,122.96	1,394,352.18	
	23		S61-18-15 E	160.68			
		2109-1-11A		1134.87	662,045.54	1,394,493.19	

SHEET 3 of 4

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 22, T 17N, R 29W COUNTY WASHINGTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	233		S61-18-15E	206.79			
		2109-1-12		1164.19	661,946.50	1,394,674.50	IN SEC 23 T-17-N, R-29-W
		2201-2			662,553.54	1,392,053.95	AS PER SECTIONAL BREAKDOWN
	5		S42-59-59E	231.35			
		2201-3			662,384.34	1,392,211.73	AS PER SECTIONAL BREAKDOWN
	6		S02-35-01W	969.02			
		2201-4			661,416.30	1,392,168.05	AS PER SECTIONAL BREAKDOWN
		2203-1			660,740.42	1,392,796.56	AS PER SECTIONAL BREAKDOWN
	15		N29-41-46E	362.45			
		2203-2			661,055.27	1,392,976.12	AS PER SECTIONAL BREAKDOWN
	16		S87-19-58E	329.40			
		2203-3			661,039.94	1,393,305.16	AS PER SECTIONAL BREAKDOWN
	17		S02-43-52W	161.38			
		2203-4			660,878.74	1,393,297.47	AS PER SECTIONAL BREAKDOWN

SHEET 4 of 4

SWL FORM 136
REVISED FEB. 66