PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 17, T 19N, R 28W COUNTY BENTON

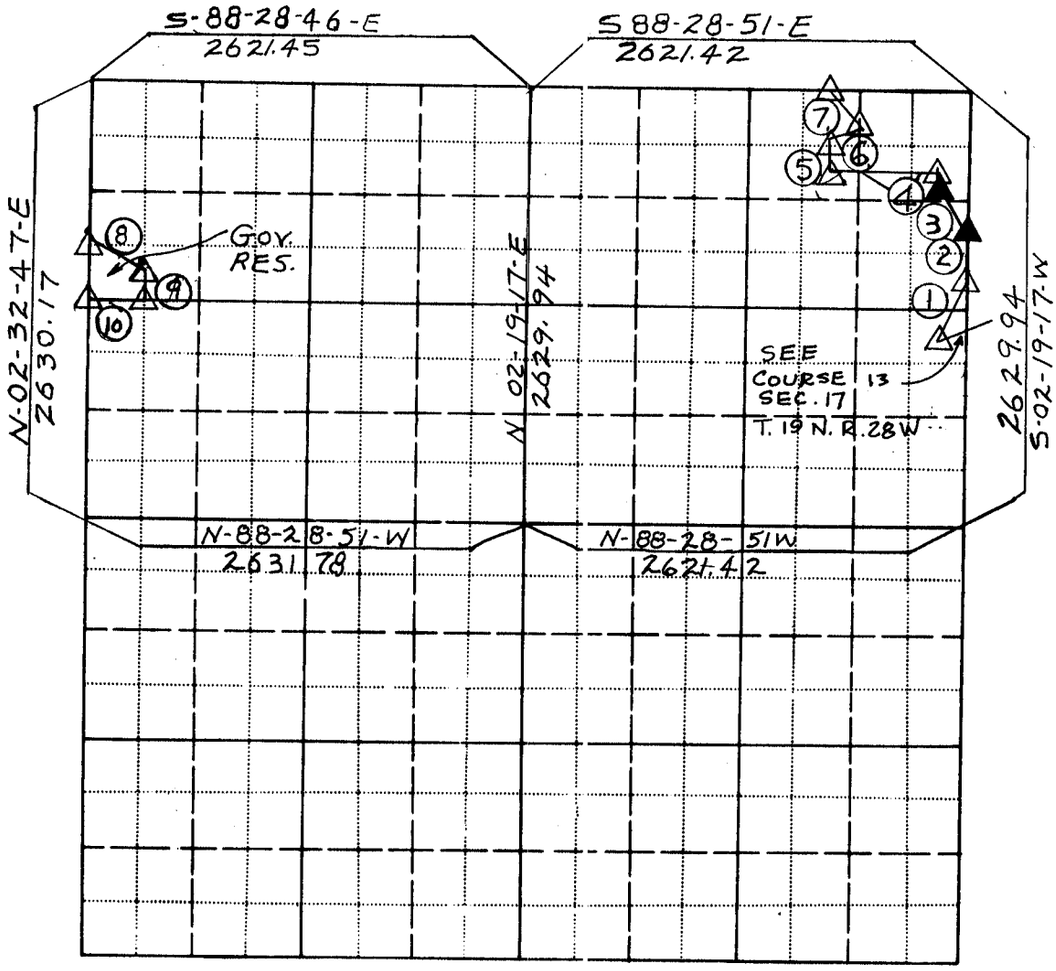

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		835-5-14		1127.89	728,706.90	1,418,198.47	
	1		N-28-36-52-E	293.05			
		835-5-14A		1157.48	726,964.16	1,418,338.81	
	1		N-28-36-52-E	76.29			
		835-5-15		1139.28	729,031.23	1,418,375.41	
	2		N-02-16-44-E	131.70			
		835-5-15A		1153.40	729,162.83	1,418,380.65	
	2		N-02-16-44-E	140.86			

Field Book No. TRANSIT-67B 11598 Date: JULY-1967
CHAIN-67B 99812
LEVEL-67B-100 819

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____
COUNTY, ARKANSAS

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 2

GN MN

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

BOUNDARY SURVEYS
BEAVER LAKE
WHITE RIVER, ARKANSAS

SEC. 17, T 19N, R 28W COUNTY BENTON

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		835-5-15B		1151.86	729,303.58	1,418,386.25	
	2		N-02-16-44-E	56.17			
		835-5-16		1143.81	729,359.79	1,418,388.48	CONC. MON.
	3		N-24-21-55-W	230.81			
		835-5-16A		1139.47	729,569.96	1,418,293.26	CONC. MON.
	3		N-24-21-55W	134.41			
		835-5-17		1130.83	729,692.55	1,418,237.78	
	4		N-88-30-55-W	102.02			
		835-5-17A		1144.36	729,695.19	1,418,135.79	
	4		N-88-30-55-W	553.25			
		835-5-18		1145.48	729,709.52	1,417,582.80	
	5		N-02-17-00-E	164.35			
		835-5-19		1135.91	729,873.79	1,417,589.35	
	6		N-46-47-35-E	233.69			
		835-5-20		1136.00	730,033.82	1,417,759.73	
	7		N-43-01-30-W	72.60			
		835-5-20A		1135.97	730,089.82	1,417,707.46	
	7		N-43-01-30-W	153.85			
		932-12		1131.97	730,202.31	1,417,602.47	
		811-1-8		1170.09	729,333.87	1,413,135.69	
	8		S-61-40-23-E	85.93			
		811-1-8A		1167.19	729,293.10	1,413,211.33	
	8		S-61-40-23-E	278.51			
		811-1-9		1131.71	729,160.94	1,413,456.49	
	9		S-02-31-12-W	164.36			
		811-1-10		1181.96	728,996.74	1,413,449.26	
	10		N-88-28-43W	92.10			
		811-1-10A		1183.09	728,999.19	1,413,357.19	
	10		N-88-28-43-W	174.46			
		811-1-10B		1164.54	729,003.82	1,413,182.79	
	10		N-88-28-43-W	61.70			
		811-1-11		1150.47	729,005.46	1,413,121.11	

SHEET 2 of 2

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

PERFORMED UNDER CONTRACT NO. DACW-03-67-C-0097

SEC. 17, T 19N, R 28W COUNTY BENTON

EASEMENTS

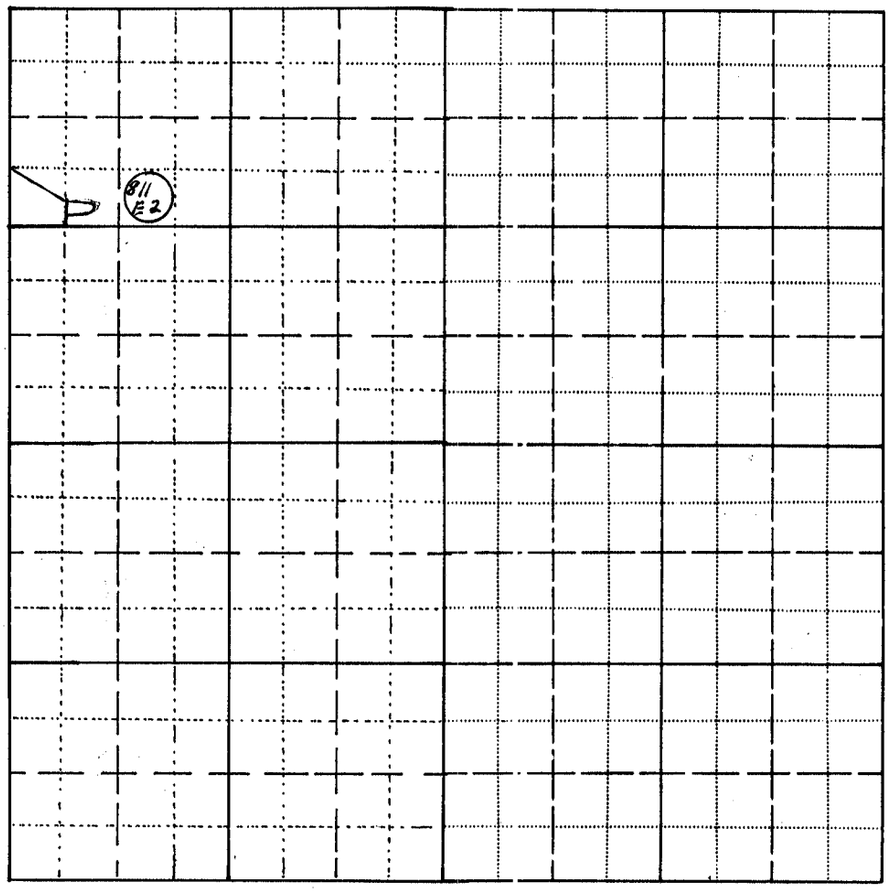

ALL MONUMENTS NOT NECESSARILY SHOWN

EASEMENT ELEV. 1135.0

APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 17, T 19N, R 28W.

BENTON COUNTY, ARKANSAS

Harold J. Pranter

REG. PROF. ENG NO. 1682

Field Book No. 67-B-22 Date: 11-67

UNDER THE SUPERVISION OF
U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS
HAROLD J. PRANTER,
CIVIL ENGINEERING AND LAND SURVEYING

SHEET ____ of ____

GN MN

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ COMPUTED COR.
- ✱ - OTHER