PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 34, T -20-N, R -28-W COUNTY Benton

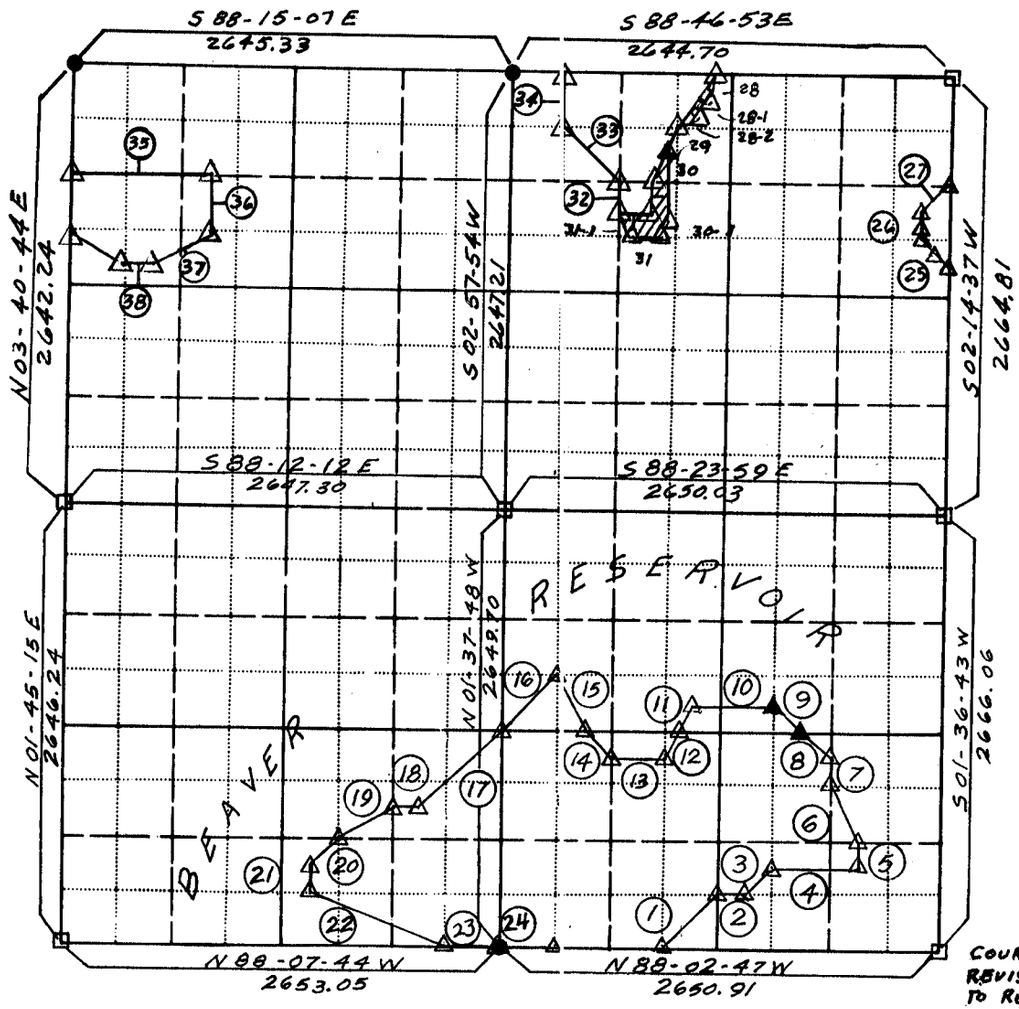

COURSES 28 THRU 31 REVISED MARCH 85 TO REFLECT A LAND EXCHANGE

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		533-1-2		1137.46	740,328.83	1,427,626.91	
	1		N46-42-30E	467.87			
		532-1		1138.47	740,649.64	1,427,967.45	
	2		S88-05-32E	165.68			
		532-2		1130.51	740,644.13	1,428,133.06	
	3		N46-39-35E	234.11			
		532-3		1126.69	740,804.80	1,428,303.32	
	4		S88-07-20E	342.74			

Field Book No. 718.7 (718.5) Date: Sept 67 (1972)
TRANSIT 67B-97 85B-1
CHAIN 67B-96
Level 67B-101
68B-13
68B-14

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____
COUNTY, ARKANSAS

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 7

GN MN 01°-07'-30" 6°-56'

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 34, T 20 N, R 28 W COUNTY Benton

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		532-3A		1131.47	740,793.57	1,428,645.69	
	4		S 88-07-20E	154.27			
		532-4		1127.39	740,788.51	1,428,800.13	
	5		N 01-19-30E	166.97			
		532-5		1128.54	740,955.40	1,428,803.98	
	6		N 24-49-26W	372.34			
		532-6		1124.82	741,293.27	1,428,647.70	
	7		N 01-35-14E	166.38			
		532-7		1118.26	741,459.54	1,428,652.31	
	8		N 43-11-50W	235.10			
		527-1		1129.08	741,630.01	1,428,491.40	CONC. MON
	9		N 43-13-02W	235.02			
		527-2		1133.14	741,802.16	1,428,330.48	CONC. MON.
	10		N 88-16-28W	314.84			
		527-2A		1144.00	741,811.64	1,428,015.78	
	10		N 88-16-28W	182.07			
		527-3		1130.21	741,817.13	1,427,833.75	
	11		S 28-07-14W	185.36			
		533-2-1		1138.69	741,653.61	1,427,746.36	
	12		S 28-08-02W	185.31			
		533-2-2		1151.80	741,490.15	1,427,658.96	
	13		N 88-14-10W	331.31			
		533-2-3		1141.24	741,500.35	1,427,327.78	
	14		N 43-18-00W	234.73			
		527-5		1149.78	741,671.16	1,427,166.82	
	15		N 24-56-18W	252.17			
		527-5A		1153.78	741,879.82	1,427,060.49	
	15		N 24-56-18W	118.77			
		527-6		1141.61	742,007.45	1,427,010.44	
	16		S 46-38-09W	203.10			
		527-6A		1149.80	741,867.99	1,426,862.79	
	16		S 46-38-09W	264.94			
		534-1		1138.91	741,686.00	1,426,670.09	
	17		S 46-41-51W	701.48			

SHEET 2 of 4

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
BEAVER RESERVOIR
WHITE RIVER, ARKANSAS

SEC. 34, T-20-N, R-28-W COUNTY Benton

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		534-2		1128.32	741,204.78	1,426,159.47	
	18		N88-12-51W	165.70			
		534-3		1122.15	741,209.94	1,425,993.84	
	19		S65-12-42W	370.01			
		534-4		1123.55	741,054.78	1,425,657.85	
	20		S46-44-30W	233.88			
		534-5		1127.69	740,894.46	1,425,487.48	
	21		S01-36-56W	165.51			
		534-6		1124.72	740,728.98	1,425,482.81	
	22		S66-27-52E	535.84			
		534-6A		1125.76	740,515.01	1,425,974.07	
	22		S66-27-52E	357.88			
		534-7		1120.57	740,372.09	1,426,302.19	
	23		S88-07-44E	331.58			
		916-1 = SY4 COR		—	740,363.37	1,426,632.63	
	24		S88-02-47E	271.29			
		916-2		1138.17	740,354.06	1,426,903.84	
		526-1-13 = 525-1		1136.59	744,437.20	1,429,399.01	
	25		N43-16-46W	122.36			
		525-1A		1157.59	744,526.28	1,429,315.13	
	25		N43-16-46W	112.36			
		525-2		1142.15	744,607.91	1,429,238.25	
	26		N01-38-17E	86.29			
		525-2A		1144.58	744,694.16	1,429,240.72	
	26		N01-38-17E	80.27			
		525-3		1139.51	744,774.40	1,429,243.01	
	27		N46-17-41E	235.31			
		525-4 = 526-3-1		1164.10	744,936.96	1,429,413.08	

SHEET 3 of 4

SWL FORM 136
REVISED FEB. 66

BOUNDARY SURVEYS
BEAVER LAKE
WHITE RIVER, ARKANSAS

SECTION 34 , T 20N , R 28W COUNTY BENTON

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	524.3		1135.90	745,967.26	1,427,950.41	IN SECTION 27
28		S15-49-26W	686.48			
	524-4		1138.08	745,306.80	1,427,763.08	
29		S 28-58-50W	374.39			REVISED MARCH 85 TO REFLECT A LAND EXCHNGE SEE SHEET 4B
	524-5		1143.60	744,979.29	1,427,581.69	
30		S02-51-20W	165.79			
	524-6		1143.68	744,813.70	1,427,573.43	
31		N 88-39-34W	85.39			
	524-6A		1143.76	744,815.63	1,427,488.55	
31		N88-39-24W	80.57			
	524-7		1131.24	744,817.52	1,427,408.00	
32		N02-47-02E	165.69			
	524-8		1139.38	744,983.02	1,427,416.05	
33		N 42-56-33W	294.22			
	524-8A		1137.82	745,198.40	1,427,215.60	
33		N 42-56-23W	168.00			
	524.9		1143.96	745,321.39	1,427,101.16	
34		N 02-53-33E	185.09			
	524-9A		1154.33	745,506.24	1,427,110.50	
34		N02-53-43E	146.02			
	524-10		1135.98	745,652.07	1,427,117.87	
	536-6 = 535-1		1148.27	745,080.10	1,424,100.53	
35		S 88-11-33E	391.31			
	535-1A		1168.78	745,067.76	1,424,491.65	
35		S 88-11-30E	253.04			
	535-1B		1169.61	745,059.77	1,424,744.56	
35		S 88-47-42E	186.14			
	535-2		1161.20	745,055.86	1,424,930.66	
36		S 03-27-00W	240.59			
	535-2A		1183.52	744,814.81	1,424,915.12	
36		S03-26-58W	89.88			
	535-3		1176.71	744,725.09	1,424,909.72	
37		S65-42-55W	138.89			
	535-3A		1179.60	744,667.97	1,424,783.12	
37		S65-42-52W	149.23			
	535-3B		1168.39	744,606.60	1,424,647.09	
37		S65-42-49W	87.37			

SHEET 4 OF 4

SWL FORM 136
REVISED OCT. 1971

BOUNDARY SURVEYS
BEAVER LAKE
WHITE RIVER, ARKANSAS

SECTION 34 , T 20N , R 28W COUNTY BENTON

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	535-4		1153.38	744,570.66	1,424,567.45	
38		N88-11-13W	166.23			
	535-5		1142.67	744,575.92	1,424,401.31	
39		N61-24-16W	61.90			
	535-5A		1159.24	744,605.56	1,424,346.96	
39		N61-24-19W	304.44			
	535-6 = 536-2-1		1157.36	744,751.26	1,424,079.65	

SHEET 4A OF 4

SWL FORM 136
REVISED OCT. 1971

BOUNDARY SURVEYS
BEAVER LAKE
WHITE RIVER, ARKANSAS

SECTION 34 , T 20 N , R 28 W COUNTY BENTON

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	COURSES 28 THRU 31 REVISED MARCH 85 TO REFLECT					
	A LAND EXCHANGE					
	524-3-3		1137.19	745,794.06	1,427,901.24	TYPE-3 SET 1985
28		S 00-15-15 E	123.97			
	524-3-4		1135.85	745,670.07	1,427,901.78	" "
28-1		S 18-29-58 W	300.00			
	524-3-5		1136.15	745,385.57	1,427,806.59	" "
28-2		S 28-54-53 W	89.99			
	524-4		1138.08	745,306.80	1,427,763.08	" "
29		S 28-58-44 W	214.39			
	524-4-1		1137.55	745,119.25	1,427,659.21	" "
30		S 00-40-51 E	318.95			
	524-4-2		1128.37	744,800.32	1,427,663.00	" "
30-1		S 43-45-05 W	135.01			
	524-4-3		1128.96	744,702.80	1,427,569.64	" "
31		N 84-19-57 W	112.50			
	524-4-4		1130.87	744,713.91	1,427,457.69	" "
31-1		N 25-39-54 W	115.01			
	524-7		1131.24	744,817.57	1,427,407.88	TYPE-3

SHEET 4B OF 4

SWL FORM 136
REVISED OCT. 1971