BOUNDARY SURVEYS
CLEARWATER LAKE
BLACK RIVER, ARKANSAS & MISSOURI

SECTION 17, T 29N, R 2E COUNTY REYNOLDS, MO.

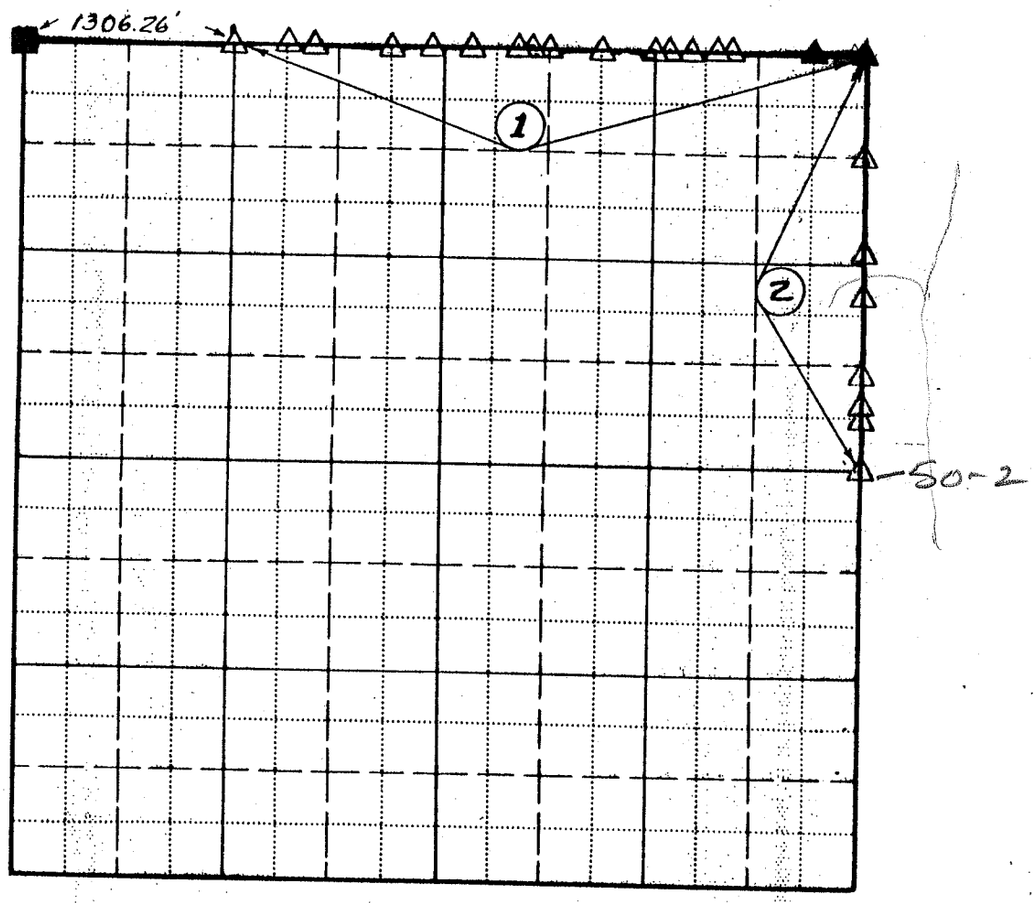

FULL SECTION APPROXIMATE SCALE 1:12,000

COORDINATES REVISED JULY 1980 FROM STA. LOGAN & L line

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	BM 52-1			496,659.19	393,922.45	
1		S87-45-13E	347.95			
	52-1-A			496,645.55	394,270.13	
1		S87-45-13E	151.06			
	52-1-B			496,639.63	394,421.08	
1		S87-45-13E	442.72			
	52-1-C			496,622.27	394,863.46	
1		S87-45-13E	280.26			

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

COUNTY, ARKANSAS

SURVEYOR REG. NO.

Field Book No. 69C-4, 80C-2 Date: 1969, 1980

GN MN

LEGEND
- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 2
- ● FOUND I. P.
- ○ SET I. P.
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✱ OTHER

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 OF 3

BOUNDARY SURVEYS
CLEARWATER LAKE
PIEDMONT, MISSOURI

SECTION 17 , T 29N , R 2E COUNTY REYNOLDS, MO.

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	52-1-D			496,611.29	395,143.50	
1		S87-45-13E	249.31			
	52-1-E			496,601.52	395,392.62	
1		S87-45-13E	249.31			
	52-1-F			496,591.74	395,641.74	
1		S87-45-13E	99.99			
	52-1-G			496,587.82	395,741.65	
1		S87-45-13E	99.99			
	52-1-H			496,583.90	395,841.59	
1		S87-45-13E	296.47			
	52-1-I			496,572.28	396,137.82	
1		S87-45-13E	381.91			
	52-1-J			496,557.31	396,519.43	
1		S87-45-13E	125.85			
	52-1-K			496,552.38	396,645.19	
1		S87-45-13E	150.04			
	52-1-L			496,546.50	396,795.11	
1		S87-45-13E	150.04			
	52-1-M			496,540.62	396,945.04	
1		S87-45-13E	98.66			
	52-1-N			496,536.75	396,043.62	Conc. Mon.
1		S87-45-13E	498.51			
	52-1-P			496,517.21	397,541.75	Conc. Mon.
1		S87-45-13E	296.75			
	BM 50-1-52-2			496,505.58	397,838.27	8/9 17/16
2		S01-39-54W	642.14			
	50-1-A			495,863.51	397,819.61	
2		S01-39-54W	619.11			
	50-1-B			495,244.86	397,801.62	
2		S01-39-54W	277.25			
	50-1-C			494,967.73	397,793.57	
2		S01-39-54W	494.93			
	50-1-D			494,473.01	397,779.19	
2		S01-39-54W	203.67			
	50-1-E			494,269.53	397,773.27	
2		S01-39-54W	97.11			
	50-1-F			494,172.36	397,770.45	
2		S01-39-54W	300.77			
	50-1-G			493,871.71	397,761.71	

SHEET 2 OF 3

SWL FORM 136
REVISED OCT. 1971

BOUNDARY SURVEYS
CLEARWATER LAKE
PIEDMONT, MISSOURI

SECTION 17 , T 29N , R 2E COUNTY REYNOLDS, MO.

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
2		S01-39-54W	3.28			
	BM 50-2 = 1/4 COR 17/16			493,868.43	397,761.62	TYPE-III

SHEET 3 OF 3

SWL FORM 136
REVISED OCT. 1971