BOUNDARY SURVEYS
LAKE DARDANELLE
ARKANSAS RIVER, ARKANSAS

SECTION 19, T-7-N, R-20-W COUNTY POPE

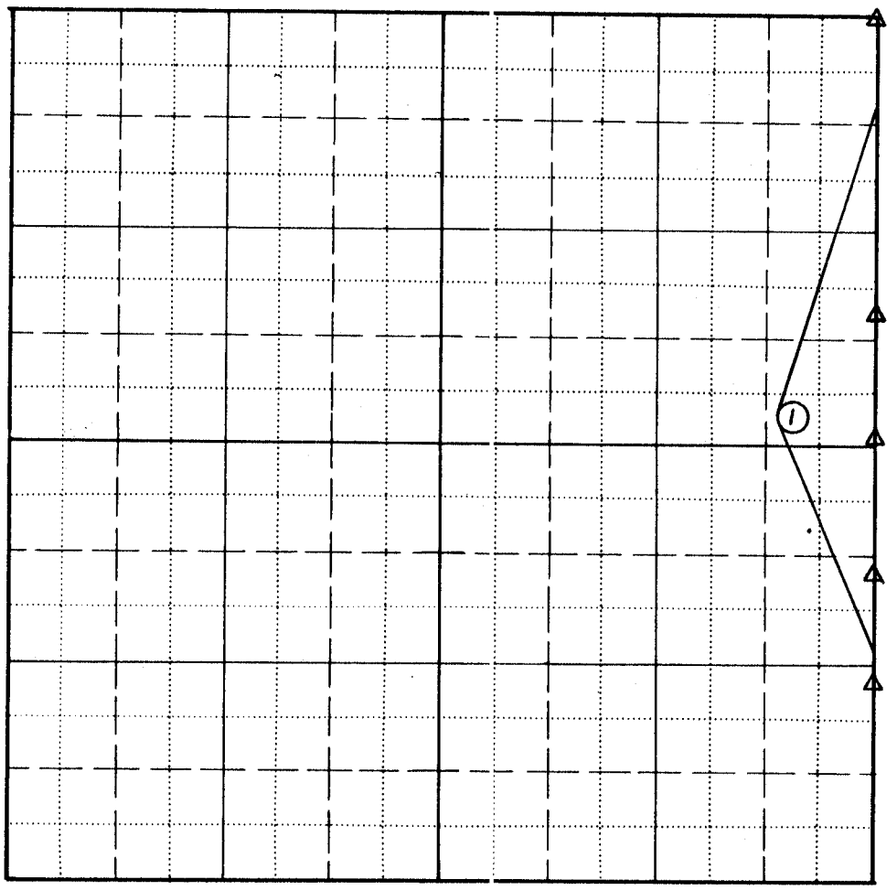

FULL SECTION APPROXIMATE SCALE 1:12,000

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	108-1A		—	332,062.24	1,654,494.83	
1		N02-13-11E	653.75			
	108-1B		—	332,715.50	1,654,520.15	
1		N02-13-11E	812.86			
	108-1C		—	333,527.75	1,654,551.63	
1		N02-13-11E	757.49			
	108-D		—	334,284.67	1,654,580.97	
1		N02-13-11E	1381.78			

Field Book No. 70D-4. Date: MAY 1970

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 19, T 7N, R 20.

COUNTY, ARKANSAS

SURVEYOR REG. NO.

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 OF 2

GN MN 0°43'04" 6°05'

LEGEND
- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 2
- ● FOUND I. P.
- ○ SET I. P.
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✳ OTHER

BOUNDARY SURVEYS
LAKE DARDANELLE
ARKANSAS RIVER, ARKANSAS

SECTION 19 , T-7-N , R-20-W COUNTY POPE

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	108-2		—	335,665.42	1,654,634.30	

SHEET 2 OF 2

SWL FORM 136
REVISED OCT. 1971