PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 3, T 7N, R 23W COUNTY LOGAN

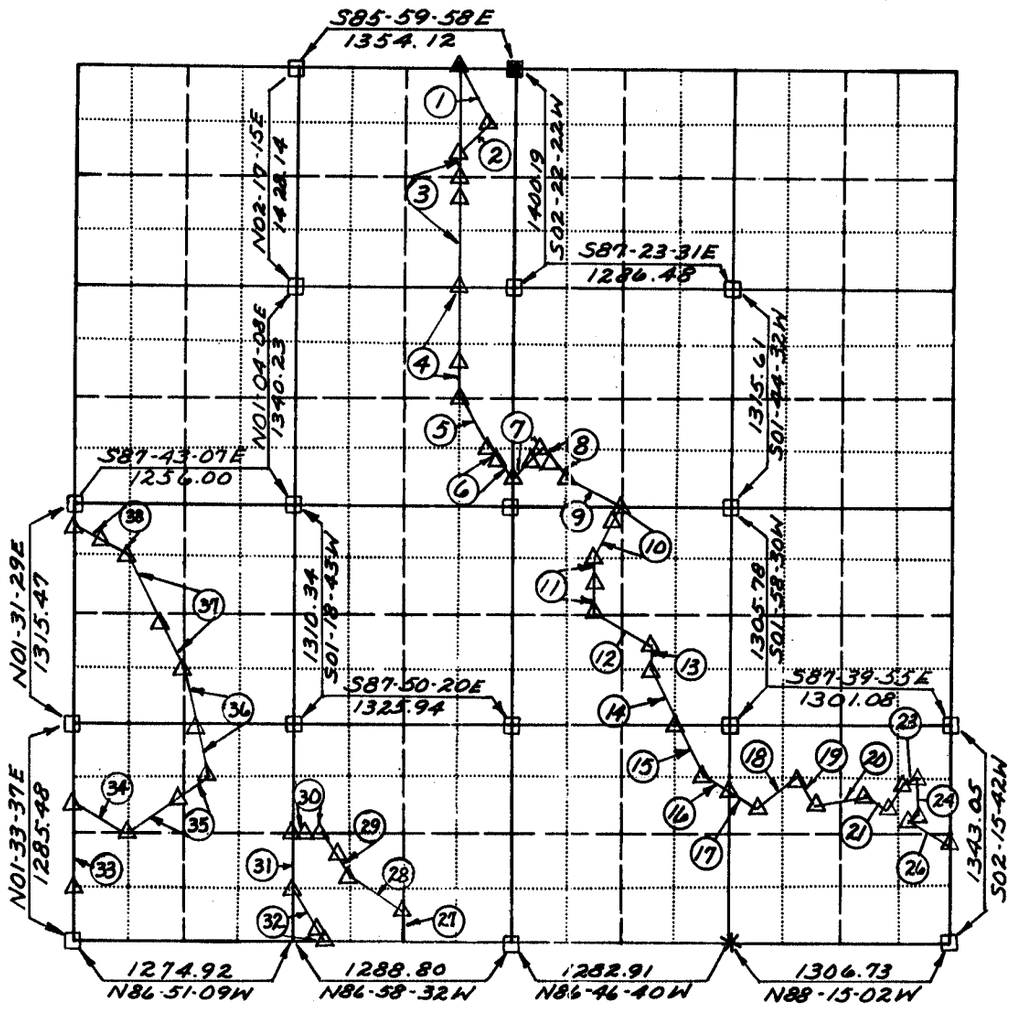

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE	ELEVATION	POSITION		REMARKS
			GRID BEARING	DISTANCE	NORTH	EAST	
		1122-1= 1127-1		340.86	355,742.64	1,573,603.17	
	1		S19-23-44E	446.20'			
		1127-2		345.78	355,321.93	1,573,751.29	
	2		S47-48-07W	231.79'			
		1127-3		342.63	355,166.41	1,573,579.76	
	3		S02-03-18W	138.98'			
		1127-3A		347.59	355,027.62	1,573,574.76	
	3		S02-03-18W	84.84'			

Field Book No. 67D11E17 Date: Sept. 1967
68D16E69D-2 Jan. 1969

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

Level Book Nos. 69D-13 Feb. 1969
67D-12 Sept 1967
69D-1 Jan. 1969
68D-17 Jan. 1969

GN MN 43'04' 6°41'

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____
COUNTY, ARKANSAS

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

SHEET 1 of 5

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 3, T 7-N, R 23W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		1127-3B		345.59'	354,942.90	1,573,571.73	
	3		S02-03-18W	601.09'			
		1127-4= 1128-1		352.88	354,342.64	1,573,550.26	
	4		S03-10-18W	453.23'			
		1128-1A		359.81	353,889.97	1,573,525.22	
	4		S03-10-18W	209.17'			
		1128-2		350.76	353,681.02	1,573,513.63	
	5		S24-27-20E	110.91'			
		1128-2A		357.26	353,580.08	1,573,559.54	
	5		S24-27-20E	261.18'			
		1128-3		349.61	353,342.37	1,573,667.64	
	6		S42-43-03E	234.43'			
		1128-4		344.98	353,170.23	1,573,826.58	
	7		N46-45-08E	203.02'			
		1128-4A		357.79	353,309.16	1,573,974.28	
	7		N46-45-08E	28.90'			
		1128-5		——	353,328.96	1,573,995.33	NOT SET IN STOCK POND
	8		S42-10-25E	28.90			
		1128-5A		355.53	353,307.55	1,574,014.70	
	8		S42-10-25E	27.00'			
		1128-5B		359.18	353,287.55	1,574,032.81	
	8		S42-20-25E	175.84'			
		1128-6		351.13	353,157.30	1,574,150.80	
	9		S60-50-08E	364.80'			
		1128-7= 1142-1-1		354.26	352,979.70	1,574,469.05	
	10		S28-02-23W	271.00'			
		1142-1-1A		358.97	352,740.27	1,574,341.54	
	10		S28-02-23W	92.33'			
		1142-1-2		356.65	352,658.70	1,574,298.09	
	11		S01-27-40W	206.67'			
		1142-1-2A		360.35	352,452.01	1,574,292.82	
	11		S01-27-40W	46.30'			
		1142-1-3		350.16	352,405.72	1,574,291.64	
	12		S42-58-59E	462.67'			

SHEET 2 of 5

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 3, T 7-N, R 23-W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		1142-1-4		351.95	352,067.44	1,574,606.88	
	13		S01-36-42W	74.12'			
		1142-1-5		346.18	351,993.31	1,574,604.80	
	14		S24-24-53E	364.88'			
		1142-1-6= 1141-1		346.31	351,661.08	1,574,755.52	
	15		S22-55-26E	372.98'			
		1141-2		342.18	351,317.61	1,574,900.78	
	16		S59-47-30E	180.97'			
		1141-3= 1142-2-1		344.28	351,226.60	1,575,057.00	
	17		S60-18-49E	183.14'			
		1142-2-2		342.43	351,135.98	1,575,215.95	
	18		N58-34-36E	291.33'			
		1142-2-3= 1155-1		348.63	351,287.66	1,575,464.22	
	19		S25-09-28E	181.08'			
		1155-2		345.98	351,123.83	1,575,541.17	
	20		N80-40-25E	332.67'			
		1155-3		350.17	351,177.79'	1,575,869.73	
	21		S58-18-23E	173.44'			
		1155-4		349.13	351,086.66	1,576,017.32	
	22		N31-41-34E	202.96'			
		1156-2		346.83	351,259.56	1,576,124.07	
	23		N36-08-32E	47.04'			
		1156-3		348.05	351,297.59	1,576,151.85	
	24		S04-14-29W	197.10'			
		1156-4= 1155-6		347.58	351,101.22	1,576,137.29	
	25		S23-12-23W	75.87'			
		1155-7		348.74	351,031.57	1,576,107.42	
	26		S58-19-37E	206.90'			
		1155-8= 1153-1		348.99	350,922.92	1,576,283.53	

SHEET 3 of 5

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 3, T 7-N, R 23-W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		1135-1-5		351.20	350,299.82	1,573,100.05	In Sec. 10
	27		N03-45-42E	251.92'			
		1135-1-6		353.99	350,551.00	1,573,116.63	
	28		N54-04-35W	417.62			
		1135-1-7		361.74	350,796.01	1,572,778.46	
	29		N28-45-21W	141.63'			
		1135-1-7A		359.61	350,920.17	1,572,710.33	
	29		N28-45-21W	184.44'			
		1135-1-8		343.77	351,081.86	1,572,621.60	
	30		N87-28-42W	54.12'			
		1135-1-8A		362.49	351,084.24	1,572,567.54	
	30		N87-28-42W	109.30			
		1135-1-9= 1133-1		355.00	351,089.04	1,572,458.36	
	31		S00-53-17W	327.55			
		1133-2= 1135-2-1		351.22	350,761.54	1,572,453.28	
	32		S24-53-59E	352.20			
		1135-2-1A		345.29	350,442.07	1,572,601.57	
	32		S24-53-59E	17.99'			
		1135-2-2		344.81	350,425.75	1,572,609.14	
		1132-2-3= 1133-4		346.38	350,823.35	1,571,185.91	
	33		N01-30-28E	482.06'			
		1133-5		349.32	351,305.65	1,571,198.60	
	34		S60-46-16E	357.96'			
		1133-6		346.11	351,130.97	1,571,510.82	
	35		N57-43-44E	391.40'			
		1133-6A		348.53	351,340.02	1,571,841.86	
	35		N57-43-44E	177.95'			
		1133-7		342.00	351,435.06	1,571,992.37	
	36		N12-15-19W	310.64'			
		1133-7A		346.66	351,738.89	1,571,926.37	

SHEET 4 of 5

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 3, T 7 N, R 23 W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	36		N12-15-19W	363.53'			
		1133-8		338.05	352,094.44	1,571,849.14	
	37		N24-03-07W	308.40'			
		1133-8A		348.41	352,376.30	1,571,723.34	
	37		N24-03-07W	423.36'			
		1133-9		341.64	352,763.24	1,571,550.65	
	38		N60-20-10W	185.57'			
		1133-9A		351.20	352,855.13	1,571,389.31	
	38		N60-20-10W	170.92'			
		1133-10= 1132-1-1		343.66	352,939.77	1,571,240.71	

SHEET 5 of 5

SWL FORM 136
REVISED FEB. 66