PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 11, T 7-N, R 23-W COUNTY LOGAN

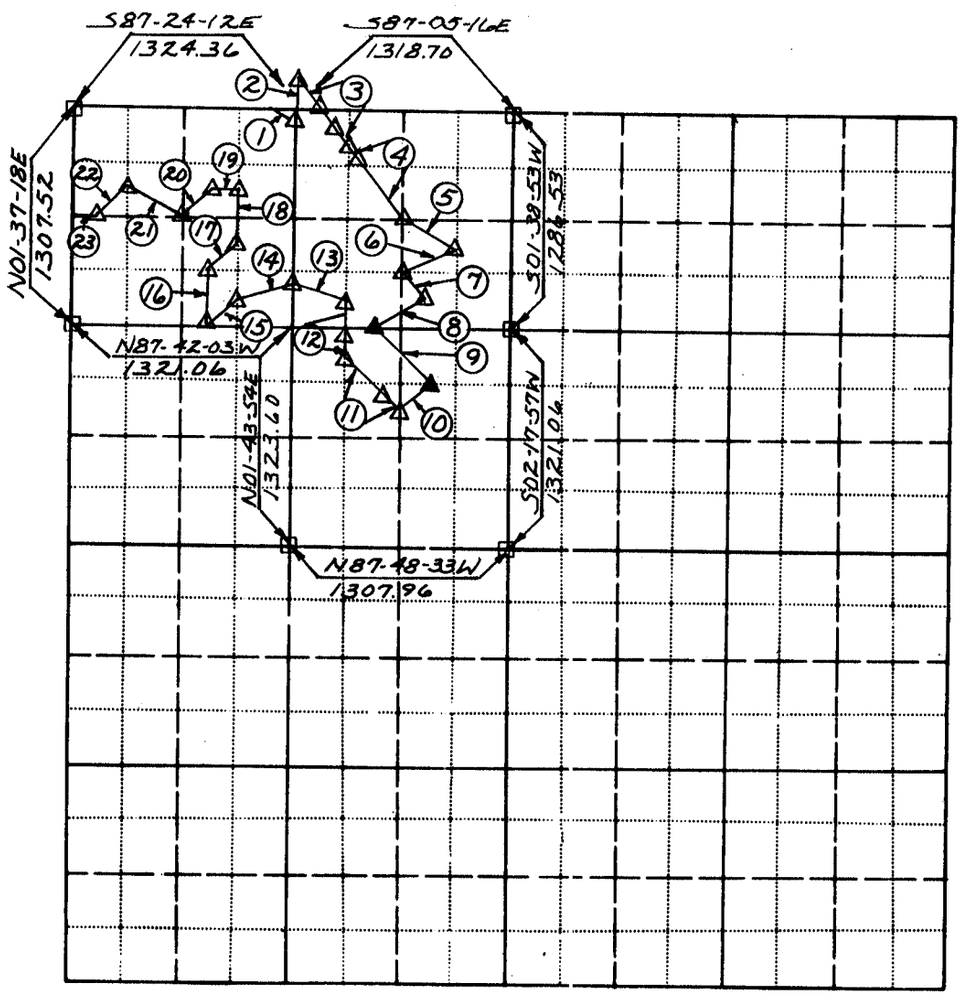

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		1152-1E		346.90	350,386.14	1,577,216.22	In Sec. 2
	1		S67-07-54E	465.55'			
		1152-2		349.94	350,205.17	1,577,645.30	
	2		N01-39-18E	160.00'			
		1152-3		345.49 ~~343.32~~	350,365.36	1,577,649.93	T-3 Reset 1977 In Sec. 2
	3		S42-39-30E	216.74'			
		1152-3A		369.31	350,205.90	1,577,796.87	In Sec. 2
	3		S42-39-30E	146.18'			

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____

COUNTY, ARKANSAS

Field Book No. 68D-16 / 69D-2 Date: Jan. 69

Level Book No 69D-1

GN MN 0°34'21" 6°37'

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 3

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 11, T 7-N, R 23-W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		1152-3B		351.70	350,098.35	1,577,895.97	
	3		S42-39-30E	108.80'			
		1152-4		——	350,018.27	1,577,969.73	INCORRECT RESET T-3 1977
	4		S32-11-09E	64.47'			
		1152-4A		343.39	349,963.67	1,578,004.09	℄ OF FENCE T-3 RESET 1977
	4		S32-11-09E	527.44'			
		1152-5		346.25	349,517.00	1,578,285.20	
	5		S61-33-52E	369.61'			
		1152-6		346.99	349,340.98	1,578,610.27	
	6		S66-14-17W	365.43'			
		1152-7		345.17	349,193.64	1,578,275.61	
	7		S36-04-42W	269.37			
		1152-8= 1149-1		348.90	348,975.93	1,578,434.24	
	8		S73-24-52W	347.77			
		1149-2		346.84	348,876.66	1,578,100.94	
	9		S42-48-56E	468.10'			
		1149-3		345.90	348,533.12	1,578,419.22	
	10		S47-00-58W	232.83'			
		1148-1		367.86	348,374.25	1,578,248.76	
	11		N42-48-53W	128.17'			
		1148-1A		365.78	348,468.23	1,578,161.69	
	11		N42-48-53W	339.93'			
		1148-2		384.32	348,717.48	1,577,930.78	
	12		N01-47-24E	136.04'			
		1148-2A		380.24	348,853.33	1,577,935.03	
	12		N01-47-24E	191.46'			
		1148-3		347.90	349,044.52	1,577,941.01	
	13		N73-50-18W	340.90			
		1148-4		347.12	349,139.41	1,577,613.58	
	14		S78-28-57W	339.43'			
		1148-5		345.67	349,071.60	1,577,280.83	RESET
	15		S58-23-59W	197.64'			
		1146-1		343.84	348,967.96	1,577,112.55	RESET
	16		N01-42-59E	273.25			

SHEET 2 of 3

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 11, T - 7-N, R - 23-W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		1151-1		349.10	349,241.09	1,577,120.73	
	17		N47-29-08E	230.68			
		1151-2		347.08	349,396.85	1,577,290.63	
	18		N01-43-47E	325.53'			
		1151-3		347.25	349,721.94	1,577,300.45	
	19		N87-30-19W	165.38'			
		1151-4		342.69	349,729.14	1,577,135.18	
	20		S47-30-19W	230.61'			
		1151-5		341.04	349,573.23	1,576,965.00	
	21		N61-26-32W	370.79'			
		1151-6		345.85	349,750.46	1,576,639.38	
	22		S47-25-37W	230.72'			
		1151-7		344.97	349,594.24	1,576,469.34	
	23		N87-54-14W	490.03'			
		1151-8		345.39	349,612.17	1,575,979.51	In Sec. 10

SHEET 3 of 3

SWL FORM 136
REVISED FEB. 66