PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 36, T - 8-N, R - 21-W COUNTY POPE

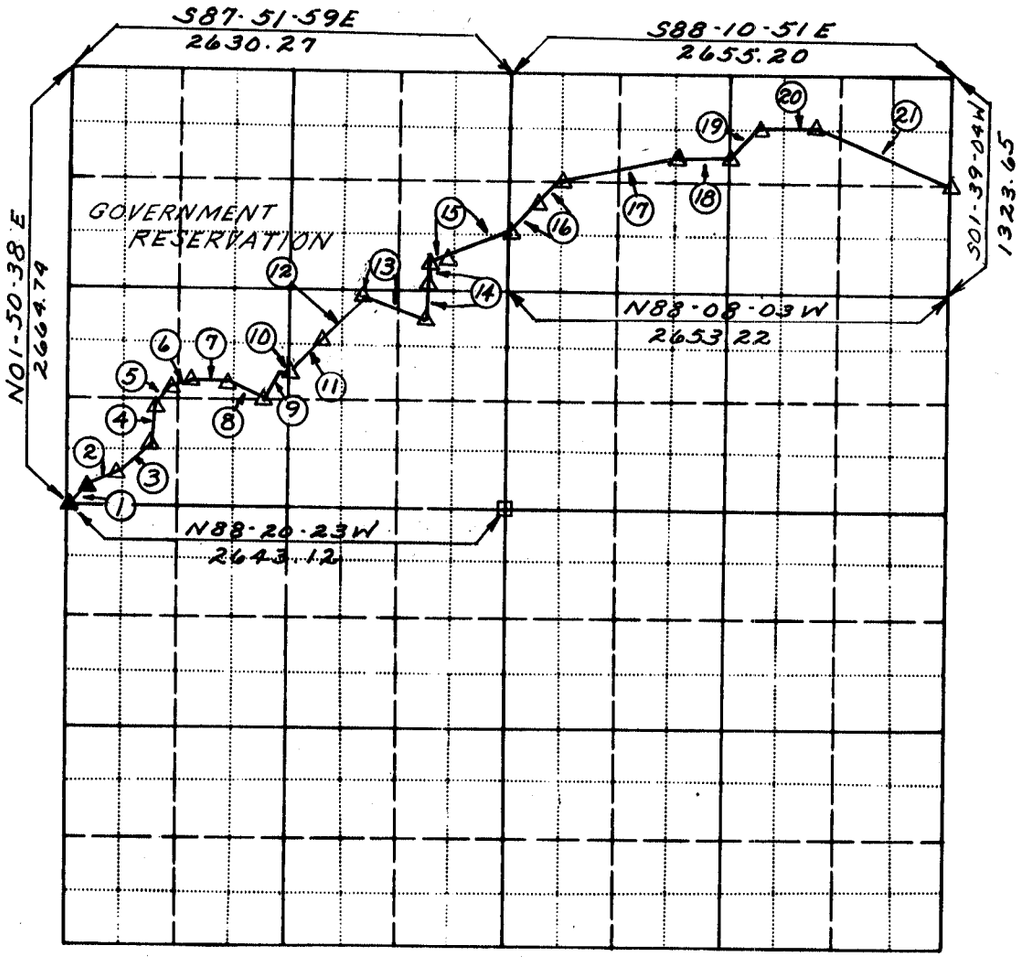

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		382-1	*	341.36	354,482.12	1,644,249.50	*
	1		N44-08-25E	175.00'			
		382-2	*	341.33	354,607.71	1,644,371.37	*
	2		N67-53-17E	190.00'			
		382-3	*	341.66	354,679.23	1,644,547.39	*
	3		N51-38-17E	275.00'			
		382-4	*	341.52	354,849.90	1,644,763.02	*
	4		N08-08-09E	225.00'			

Revised July 1971

Field Book No. 67D-15&16 Date: Oct. 67
64A-174 Mar. 66

* Reset by Hale-Martin Associates in 1980, New Elevations by same.

GN MN 0-43=04" 6°05E

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____
COUNTY, ARKANSAS

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 3

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 36, T -8-N, R -21-W COUNTY POPE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		382-5			355,072.64	1,644,794.86	
	5		N39-06-47E	150.00'			
		382-6	*	341.37	355,189.02	1,644,889.49	*
	6		N62-07-09E	125.00'			
		382-7	*	340.61	355,247.47	1,644,999.98	*
	7		N86-06-54E	240.00'			
		382-8			355,263.74	1,645,239.43	
	8		S57-53-21E	220.00'			
		382-9			355,146.79	1,645,425.78	
	9		N40-50-39E	163.59'			
		382-10	*	341.77	355,270.54	1,645,532.76	*
	10		S87-56-13E	60.02			
		386-1 382-11	*	343.51	355,268.39	1,645,592.74	*
	11		N57-01-05E	249.96			
		POT 386-1A	*	343.23			*
	12		N57-01-05E	494.21'			
		321-2-1= 386-2	*	342.28	355,662.49	1,646,200.02	*
	13		S69-37-43E	244.08'			
		321-2-2= 325-1		347.37	355,577.53	1,646,428.83	
	14		N01-37-03E	230.88'			
		325-1A		340.12	355,808.29	1,646,435.38	
	14		N01-37-03E	100.00'			
		325-2			355,908.28	1,646,438.17	IN LAKE NOT SET
	15		N73-24-30E	102.85'			
		325-2A		338.30	355,937.65	1,646,536.74	
	15		N73-24-30E	417.27'			
		325-3		342.63	356,056.80	1,646,936.63	
	16		N49-36-37E	254.58			
		325-3A		348.83	356,221.76	1,647,130.53	
	16		N49-36-37E	189.15'			
		325-4		350.23	356,344.33	1,647,274.60	
	17		N75-17-48E	693.18			
		200-1		348.58	356,520.27	1,647,945.08	
	18		S88-09-51E	331.80'			

* Reset by Hale-Martin Associates in 1980.
New Elevations by same.

SHEET 2 of 3

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 36, T -8-N, R -21-W COUNTY POPE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		200-2= 202-1		342.85	356,509.64	1,648,276.71	
	19		N46-49-30E	233.77'			
		202-2		341.65	356,669.59	1,648,447.19	
	20		S88-10-10E	331.83'			
		202-3		345.49	356,658.99	1,648,778.85	
	21		S66-26-58E	894.13'			
		202-4= 206-1			356,301.71	1,649,598.49	

SHEET 3 of 3

SWL FORM 136
REVISED FEB. 66