PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 1, T 8N, R 23W COUNTY JOHNSON

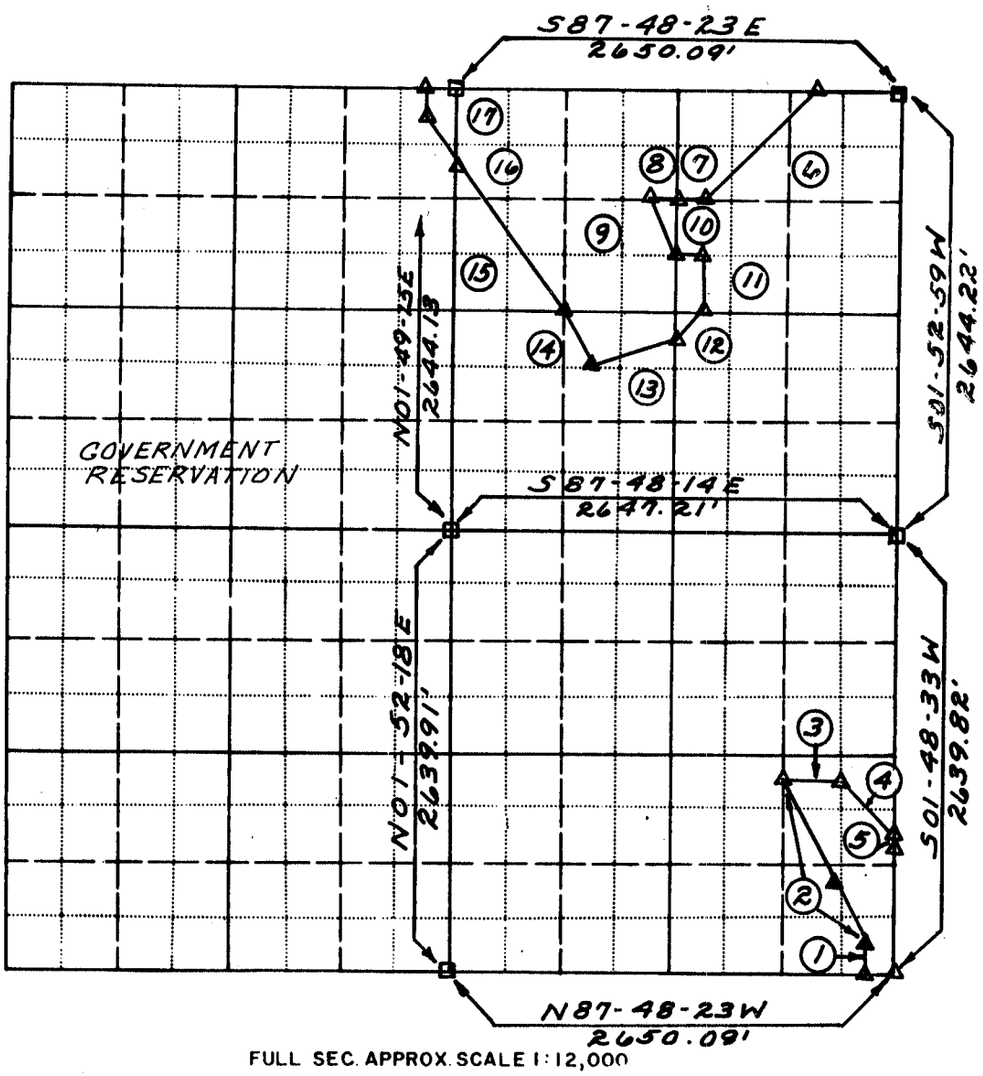

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		1402-1		350.99	379,723.98	1,586,318.04	
	1		N01-48-35E	165.00'			
		1402-2		355.97	379,888.90	1,586,323.25	
	2		N24-40-51W	407.09'			
		1402-2A		354.84	380,258.80	1,586,153.26	
	2		N24-40-51W	702.66			
		1402-3		339.74	380,897.27	1,585,859.86	
	3		S87-48-17E	330.00'			

Field Book No. 67D-17&18 Date: Oct. 1967

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____

COUNTY, ARKANSAS

_____

GN MN 0°51'47" 6°47'E

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 3

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 1, T 8 N, R 23 W COUNTY JOHNSON

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		1402-4		340.46	380,884.63	1,586,189.62	
	4		S42-59-55E	468.26			
		1402-5		344.30	380,542.16	1,586,508.96	
	5		S01-48-59W	73.88			
		1402-6		345.91	380,468.32	1,586,506.62	
		1408-8		352.97	385,017.97	1,586,156.62	
	6		S47-05-20W	933.14'			
		1408-9		355.03	384,382.63	1,585,473.18	
	7		N87-48-20W	165.59			
		1408-10= 1405-2-1		354.92	384,388.97	1,585,307.71	
	8		N87-26-37W	165.01'			
		1405-2-2		355.47	384,396.33	1,585,142.87	
	9		S24-32-10E	371.23'			
		1405-2-3= 1408-11		355.49	384,058.62	1,585,297.03	
	10		S87-48-19E	165.56'			
		1408-12		346.13	384,052.28	1,585,462.47	
	11		S01-51-19W	330.52'			
		1408-13= 1405-1-1		360.19	383,721.93	1,585,451.77	
	12		S47-07-12W	119.53'			
		1405-1-1A		372.14	383,640.59	1,585,364.18	
	12		S47-07-12W	113.49'			
		1405-1-2		363.43	383,563.37	1,585,281.02	
	13		S73-43-32W	520.84'			
		1405-1-3		361.41	383,417.41	1,584,781.05	
	14		N24-38-42W	369.84'			
		1405-1-4		363.79	383,753.56	1,584,626.83	
	15		N36-48-19W	183.53'			
		1405-14A		372.60	383,900.51	1,584,516.88	
	15		N36-48-19W	429.13'			
		1405-14B		353.08	384,244.10	1,584,259.79	
	15		N36-48-19W	336.89'			
		1405-1-4C		350.22	384,513.84	1,584,057.96	

SHEET 2 of 3

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 1, T 8 N, R 23 W COUNTY JOHNSON

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	15		N36-48-19W	114.65			
		1405-1-5			384,605.64	1,583,989.27	IN WATER
	16		N24-40-07W	135.00'			
		1405-1-5A		364.42	384,728.32	1,583,932.93	
	16		N24-40-07W	145.08			
		1405-1-5B		378.94	384,860.16	1,583,872.38	
	16		N24-40-07W	89.83			
		1405-1-6		379.66	384,941.79	1,583,834.88	
	17		N01-49-09E	100.22'			
		1405-1-6A		380.57	385,041.96	1,583,838.06	
	17		N01-49-09E	64.80'			
		1405-1-7= 1410-1-1		368.38	385,106.73	1,583,840.12	

SHEET 3 of 3

SWL FORM 136
REVISED FEB. 66