BOUNDARY SURVEYS
LAKE DARDANELLE
ARKANSAS RIVER, ARKANSAS

SECTION 25, T 8N, R 23 W COUNTY Logan

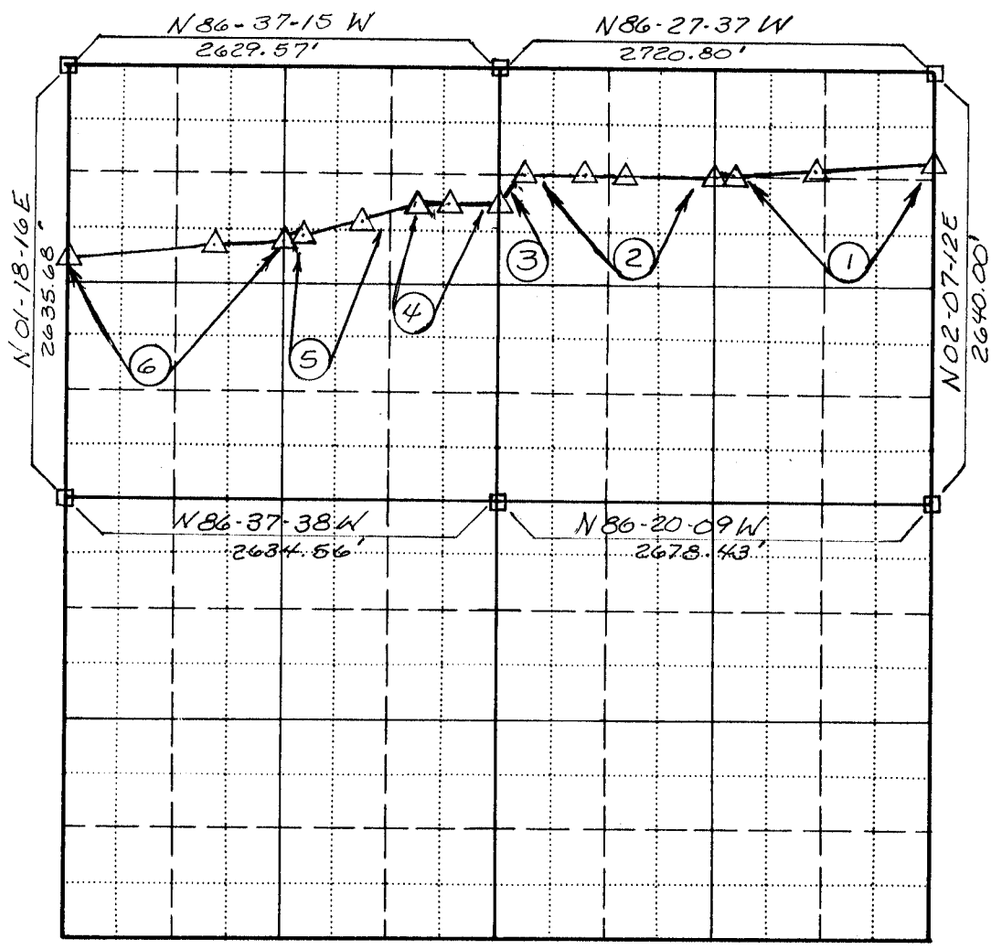

FULL SECTION APPROXIMATE SCALE 1:12,000

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	1307-2 = 1308-1		373.42	364,934.62	1,587,402.29	Type 3
1		S89-30-31 W	724.72'			
	1308-1-A		383.09	364,928.13	1,586,677.90	Type 3
1		S89-30-31 W	499.20'			
	1308-1-B		394.79	364,923.66	1,586,178.92	Type 3
1		S89-30-31 W	132.45'			
	1308-2		392.22	364,922.47	1,586,046.53	Concret Mon.
2		N86-20-40 W	562.42'			

Field Book No. 73D-7 / 72D-16-B Date: 1973

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

COUNTY, ARKANSAS

SURVEYOR REG. NO.

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 OF 2

GN MN

LEGEND
- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 2
- ● FOUND I. P.
- ○ SET I. P.
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✳ OTHER

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 25, T 8N, R 23W COUNTY Logan

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		1308-2-A		386.79	364,958.12	1,585,485.48	Concret Mon.
2			N86-20-40W	257.26'			
		1308-2-B		383.71	364,974.42	1,585,228.84	Type 3
2			N86-20-40W	371.07'			
		1308-3		375.10	364,997.94	1,584,857.67	Type 3
3			S47-27-24W	228.27'			
		1308-4		406.39	364,843.51	1,584,690.59	Type 3
4			N86-35-57W	308.18'			
		1308-4-A		402.73	364,863.68	1,584,383.07	Type 3
4			N86-35-57W	186.85'			
		1308-5		388.23	364,872.48	1,584,196.63	Type 3
5			S82-06-01W	355.59'			
		1308-5-A		392.91	364,823.68	1,583,844.55	Type 3
5			S82-06-01W	380.36'			
		1308-5-B		390.55	364,771.26	1,583,467.96	Type 3
5			S82-06-01W	98.13'			
		1308-6		377.88	364,757.72	1,583,370.80	Type 3
6			S86-09-10W	446.08'			
		1308-6A		377.88	364,727.63	1,582,925.91	Type 3
6			S86-05-07W	874.49'			
		1308-7		385.50	364,667.53	1,582,053.46	

SHEET 2 of 2

SWL FORM 136
REVISED FEB. 66