PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 28, T 8-N, R 23-W COUNTY LOGAN

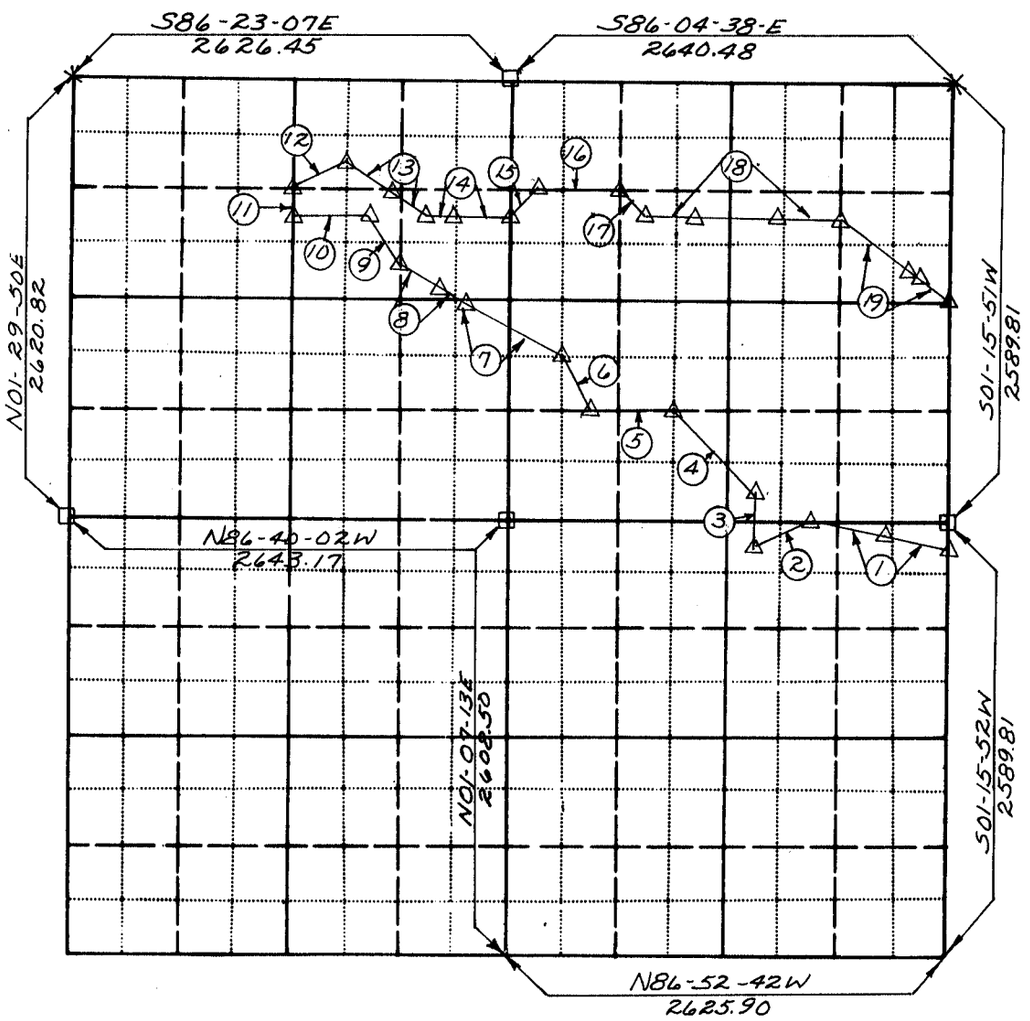

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		1204-5		352.76	363,660.85	1,571,499.43	
	1		N75-21-35W	394.12'			
		1204-5A		349.00	363,706.46	1,571,118.14	
	1		N75-21-35W	450.74'			
		1204-6		350.99	363,874.36	1,570,682.06	
	2		S66-54-34W	361.06'			
		1204-7		360.03	363,732.72	1,570,349.82	
	3		N01-17-31E	324.75'			

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____

COUNTY, ARKANSAS

Field Book No. 68D-14&15 Date: Sept. 68
Level Book No. 68D-17 Sept. 68
69D-1 April 69

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 3

GN MN
0°34'21" 6°37'

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 28, T -8-N, R -23-W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		1204-8		350.38	364,057.18	1,570,357.14	
	4		N42-53-33E	708.32'			
		1204-9		346.55	364,575.90	1,569,875.24	
	5		N86-17-36W	494.05'			
		1204-10		354.51	364,607.84	1,569,382.21	
	6		N25-04-39W	371.35'			
		1204-11		346.74	364,944.01	1,569,224.90	
	7		N60-30-27W	701.02'			
		1204-11A		346.28	365,289.05	1,568,614.87	
	7		N60-30-27W	46.48'			
		1204-12= 1206-1		352.60	365,311.92	1,568,574.42	Bolt Spike in ℄ of Road
	8		N60-32-30W	30.75'			
		1206-1A		346.75	365,327.01	1,568,547.71	
	8		N60-32-30W	342.55'			
		1206-2		345.46	365,495.46	1,568,249.46	
	9		N24-58-33W	371.42'			
		1206-3		345.34	365,831.96	1,568,092.72	
	10		N86-24-36W	493.44'			
		1206-4		349.48	365,862.86	1,567,600.22	
	11		N01-22-35E	163.41'			
		1206-5		355.17	366,026.12	1,567,604.15	
	12		N66-12-47E	362.14'			
		1206-6		365.94	366,172.14	1,567,935.42	
	13		S53-36-01E	356.96'			
		1206-6A		346.92	365,960.25	1,568,222.82	
	13		S53-36-01E	245.46'			
		1206-7		347.32	365,814.54	1,568,420.45	
	14		S86-24-22E	135.93'			
		1206-7A		349.10	365,806.02	1,568,556.11	
	14		S86-24-22E	357.50'			
		1206-8= 1205-1		345.03	365,783.62	1,568,912.90	
	15		N47-53-31E	226.36'			
		1205-2		348.53	365,935.33	1,569,080.75	
	16		S86-06-32E	494.74'			

SHEET 2 of 3

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 28, T -8-N, R -23-W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION / NORTH	POSITION / EAST	REMARKS
		1205-3		346.29	365,901.76	1,569,574.33	
	17		S42-48-35W	236.95'			
		1205-4		350.29	365,727.86	1,569,735.42	
	18		S86-07-42E	315.98'			
		1205-4A		351.28	365,706.51	1,570,050.67	
	18		S86-07-42E	516.54'			
		1205-4B		347.46	365,671.64	1,570,566.01	
	18		S86-07-42E	321.68'			
		1205-5		347.60	365,649.92	1,570,886.94	
	19		S50-40-09E	504.51			
		1205-5A		349.05	365,330.04	1,571,277.30	
	19		S50-40-09E	103.22			
		1205-5B		348.57	365,264.60	1,571,357.17	
	19		S50-40-09E	228.40			
		1205-6 = 1203-1		347.26	365,119.79	1,571,533.89	

SHEET 3 of 3

SWL FORM 136
REVISED FEB. 66