BOUNDARY SURVEYS
DARDANELLE LAKE
ARKANSAS RIVER, ARKANSAS

SECTION 14, T 8N, R 26W COUNTY Logan

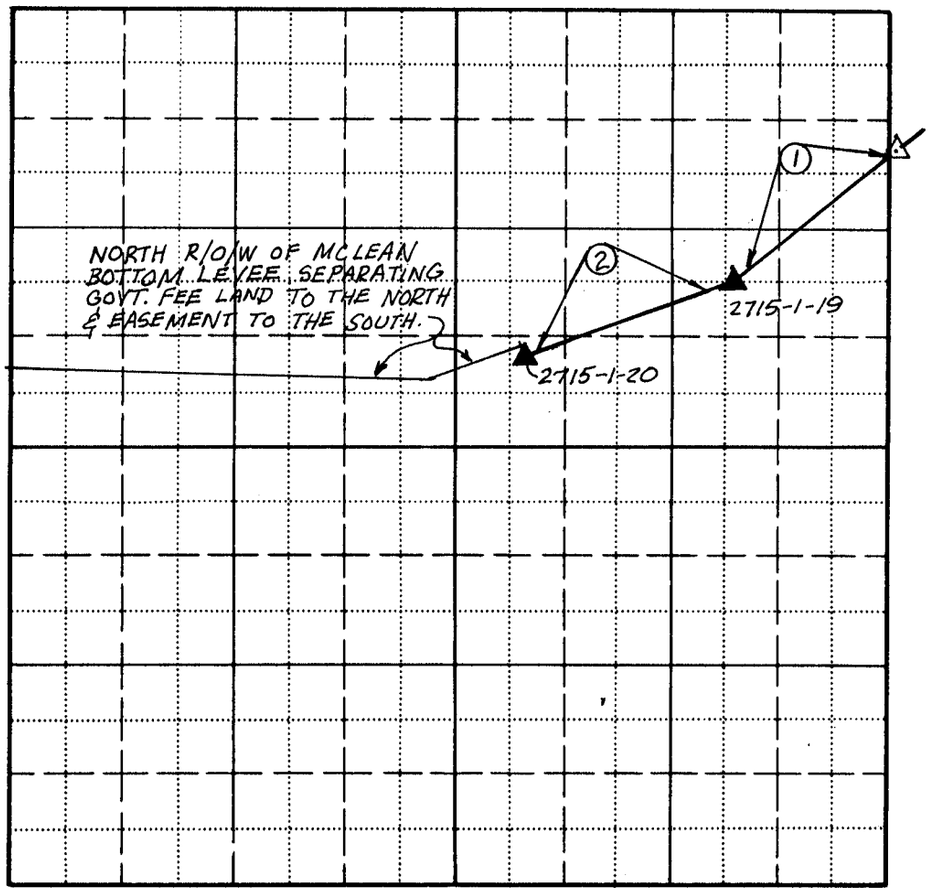

FULL SECTION APPROXIMATE SCALE 1:12,000

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	2715-1-18A			380,492.67	1,487,550.84	not in sec. 14 Falls in sec. 13
1		S56-43-24 W	1263.24			
	2715-1-19			379,799.55	1,486,494.73	conc. mon. Type I
2		S 71-13-39 W	1344.78			
	2715-1-20			379,366.79	1,485,221.49	conc. mon. Type I

Field Book No. 74D-1 Date: _____

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____
COUNTY, ARKANSAS

_____
SURVEYOR

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 OF 1

GN MN

LEGEND

- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 2
- ● FOUND I. P.
- ○ SET I. P.
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✳ OTHER