PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 32, T -8-N, R -26-W COUNTY LOGAN.

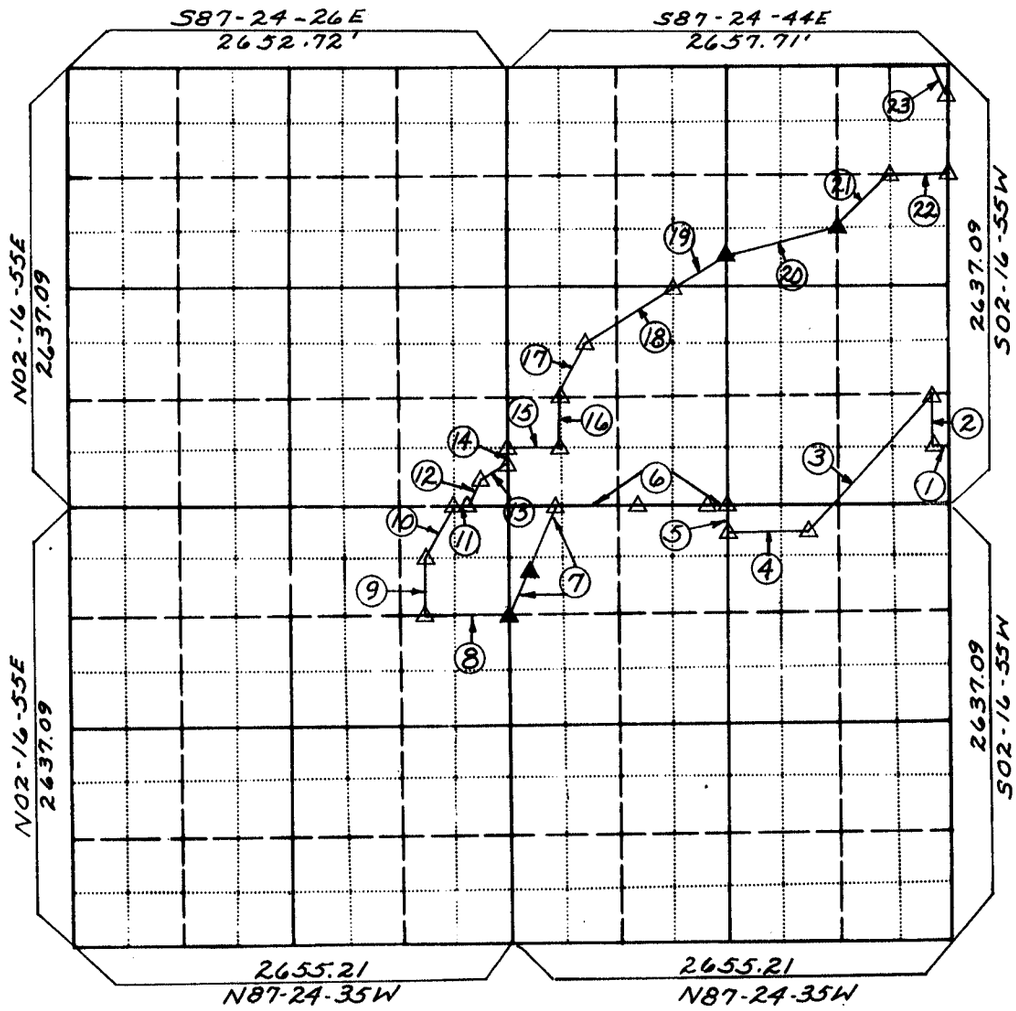

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		3303-11		364.80	363,926.32	1,471,015.67	In Sec. 33
	1		N87-13-03W	165.17'			
		3303-12		360.09	363,934.34	1,470,850.68	
	2		N02-10-04E	329.63'			
		3303-13		356.71	364,263.98	1,470,863.16	
	3		S44-29-11W	1109.12'			
		3303-14		358.69	363,473.08	1,470,086.31	
	4		N87-31-42W	497.85'			

Field Book No. 69D-11E12 Date: Nov. 1969
Level Book No 69D-12 Sept. 1969

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____
COUNTY, ARKANSAS

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 3



LEGEND
- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 32, T -8-N, R -26-W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		3303-15		359.78	363,494.56	1,469,588.86	
	5		N02-09-56E	164.82'			
		3303-16= 3301-1		358.87	363,659.38	1,469,595.09	
	6		N87-31-43W	106.95'			
		3301-1A		—	363,663.98	1,469,488.23	
	6		N87-31-43W	400.00'			
		3301-1B		359.13	363,681.38	1,469,088.56	
	6		N87-31-43W	488.76'			
		3301-2		359.31	363,702.49	1,468,600.19	
	7		S28-56-56W	430.50'			
		3301-2A		362.10	363,326.00	1,468,391.95	
	7		S28-56-56W	306.01'			
		3301-3		361.80	363,058.39	1,468,243.92	
	8		N87-31-22W	497.86			
		3301-4		359.57	363,079.91	1,467,746.46	
	9		N02-10-45E	329.63'			
		3301-5		362.19	363,409.54	1,467,759.00	
	10		N28-58-22E	368.26'			
		3301-6		361.54	363,731.91	1,467,937.49	
	11		S87-33-01E	26.31'			
		3301-7		360.29	363,730.69	1,467,963.93	Yield to Fence
	12		N36-46-29E	160.66'			
		3301-8		362.34	363,859.38	1,468,063.11	Yield to Fence
	13		N59-45-25E	253.61'			
		3301-9		360.08	363,987.12	1,468,279.20	Yield to Fence
	14		N02-07-50E	59.92'			
		3301-10		362.45	364,047.03	1,468,281.43	
	15		S87-30-03E	331.94'			
		3301-11		357.59	364,032.56	1,468,613.01	
	16		N02-09-34E	329.62'			
		3301-12		359.85	364,362.19	1,468,625.44	
	17		N28-57-42E	368.15'			
		3301-13		357.76	364,684.49	1,468,803.82	
	18		N58-54-49E	595.60'			

SHEET 2 of 3

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEYS
DARDANELLE RESERVOIR
ARKANSAS RIVER, ARKANSAS

SEC. 32, T -8-N, R -26-W COUNTY LOGAN

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		3301-14= 3303-17		359.45	364,992.10	1,469,314.04	
	19		N66-03-25E	369.85'			
		3303-18		361.65	365,142.23	1,469,652.14	
	20		N 78-38-03E N 78-34-25E	683.40' 680.72'			COMP BEAR & DIST Field BEAR & DIST
		3303-19		355.83	365,277.12	1,470,319.54	Tie Point
	21		N47-42-19E	466.64'			
		3303-20		368.30	365,591.21	1,470,664.78	
	22		S87-20-48E	332.14'			
		3303-21		366.08	365,575.83	1,470,996.64	
		3304-1= 3303-24		362.68	366,069.85	1,471,016.79	
	23		N24-47-21W	368.35'			
		3304-2		366.51	366,404.24	1,470,862.35	In Sec. 29

SHEET 3 of 3

SWL FORM 136
REVISED FEB. 66