BOUNDARY SURVEYS
LAKE DARDANELLE
ARKANSAS RIVER, ARKANSAS

SECTION 28, T 9N, R 24W COUNTY JOHNSON

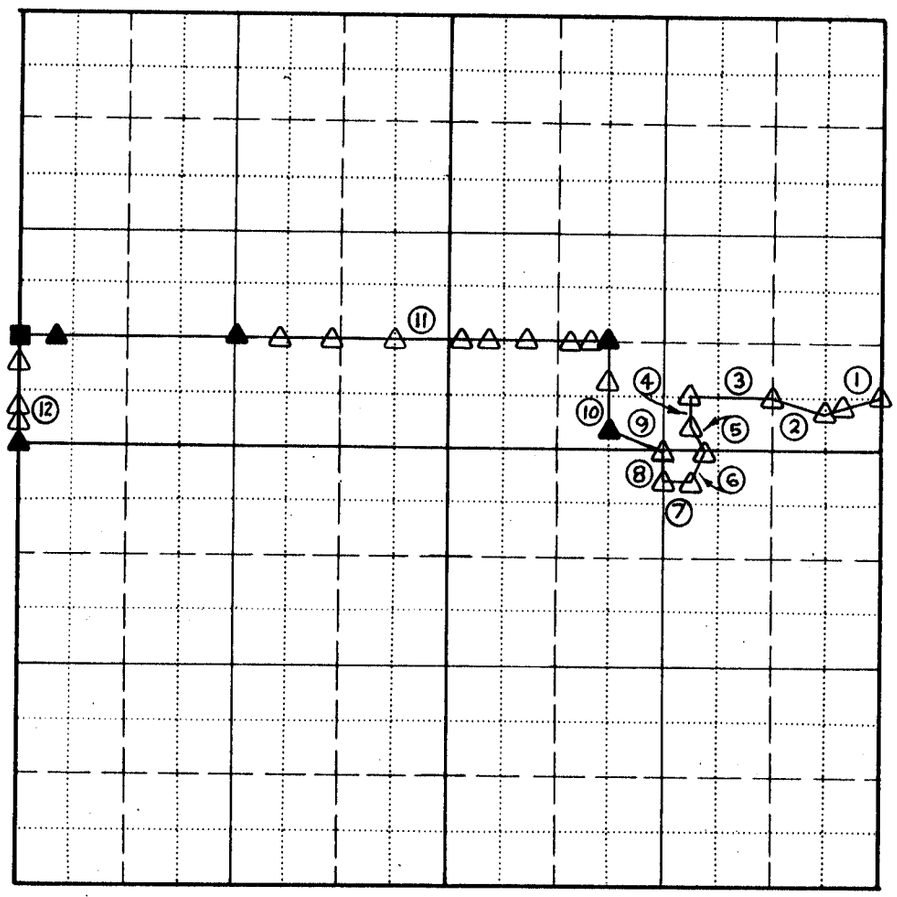

FULL SECTION APPROXIMATE SCALE 1:12,000

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	2403-7 = 2404-2-1		387.95	395,178.49	1,538,767.18	△
1		S 79-05-11W	234.01			
	2404-2-1A		379.91	395,134.19	1,538,537.40	△
1		S 79-05-11W	106.78			
	2404-2-2		362.78	395,113.97	1,538,432.55	△
2		N 72-24-49W	215.06			
	2404-2-2A		361.45	395,178.95	1,538,227.55	△
2		N 72-24-49W	129.53			

Field Book No. 71D-26, 27 & 28 Date: FEB., 1972
65A-60, 61, 62, & 63 MAY, 1965

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

COUNTY, ARKANSAS

SURVEYOR REG. NO.

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 OF 3

GN MN

LEGEND

- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 2
- ● FOUND I. P.
- ○ SET I. P.
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✳ OTHER

BOUNDARY SURVEYS
LAKE DARDANELLE
ARKANSAS RIVER, ARKANSAS

SECTION 28 , T 9 N , R 24 W COUNTY JOHNSON

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	2404-2-3		353.18	395,218.09	1,538,104.07	△
3		N 86-34-49W	498.22			
	2404-2-4		353.46	395,247.81	1,537,606.74	△
4		S 01-57-41W	168.31			
	2404-2-5		352.89	395,079.60	1,537,600.98	△
5		S 23-35-49E	130.39			
	2404-2-5A		363.14	394,960.11	1,537,653.18	△
5		S 23-35-49E	58.57			
	2404-2-6 = 2405-1		357.01	394,906.44	1,537,676.62	△
6		S 29-22-11W	183.38			
	2405-2		345.62	394,746.63	1,537,586.68	△
7		N 86-31-49W	165.00			
	2405-3		346.25	394,756.61	1,537,421.98	△
8		N 03-01-11E	167.10			
	2405-4		354.14	394,923.48	1,537,430.79	▲
9		N 54-49-49W	429.02			
	2404-3		351.29	395,170.60	1,537,080.09	▲
10		N01-01-29E	326.07			
	2404-2A			395,495.27	1,537,087.64	△
10		N01-01-29E	256.93			
	2404-2			395,752.16	1,537,092.23	▲
11		N 88-58-31W	76.97			
	2404-1D			395,753.54	1,537,015.27	△
11		N 88-58-31W	143.17			
	2404-1C			395,756.10	1,536,872.12	△
11		N 88-58-31W	265.33			
	2404-1B			395,760.85	1,536,606.83	△
11		N 88-58-31W	275.19			
	2404-1A			395,765.77	1,536,331.68	△
11		N 88-58-31W	163.73			
	2404-1			395,768.70	1,536,167.98	▲
11		N 88-58-31W	397.45			
	2405-1C			395,775.81	1,535,770.59	△
11		N 88-58-31W	391.61			
	2405-1B			395,782.81	1,535,379.04	△
11		N 88-58-31W	308.64			
	2405-1A			395,788.33	1,535,070.45	△
11		N 88-58-31W	295.51			
	2405-1 = 2407-4			395,793.58	1,534,773.69	▲

SWL FORM 136
REVISED OCT. 1971

BOUNDARY SURVEYS
LAKE DARDANELLE
ARKANSAS RIVER, ARKANSAS

SECTION 28 , T 9 N , R 24 W COUNTY JOHNSON

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
11		N 88-58-31W	1116.04			
	2407-3			395,813.57	1,533,659.13	▲
11		N 88-58-31W	228.12			
	2407-1			395,817.65	1,533,431.05	△ 6X6" STONE
12		N 01-01-29 E	106.35			
	2407-1A			395,711.32	1,533,429.15	△
12		N 01-01-29 E	338.85			
	2407-1B			395,372.52	1,533,423.09	△
12		N 01-01-29 E	113.57			
	2407-1C			395,258.97	1,533,421.06	△
12		N 01-01-29 E	101.23			
	2407-2			395,157.94	1,533,419.25	▲

SHEET 3 OF 3

SWL FORM 136
REVISED OCT. 1971