BOUNDARY SURVEYS
TABLE ROCK LAKE
WHITE RIVER, ARKANSAS & MISSOURI

SECTION 6, T 22, R 22 COUNTY STONE

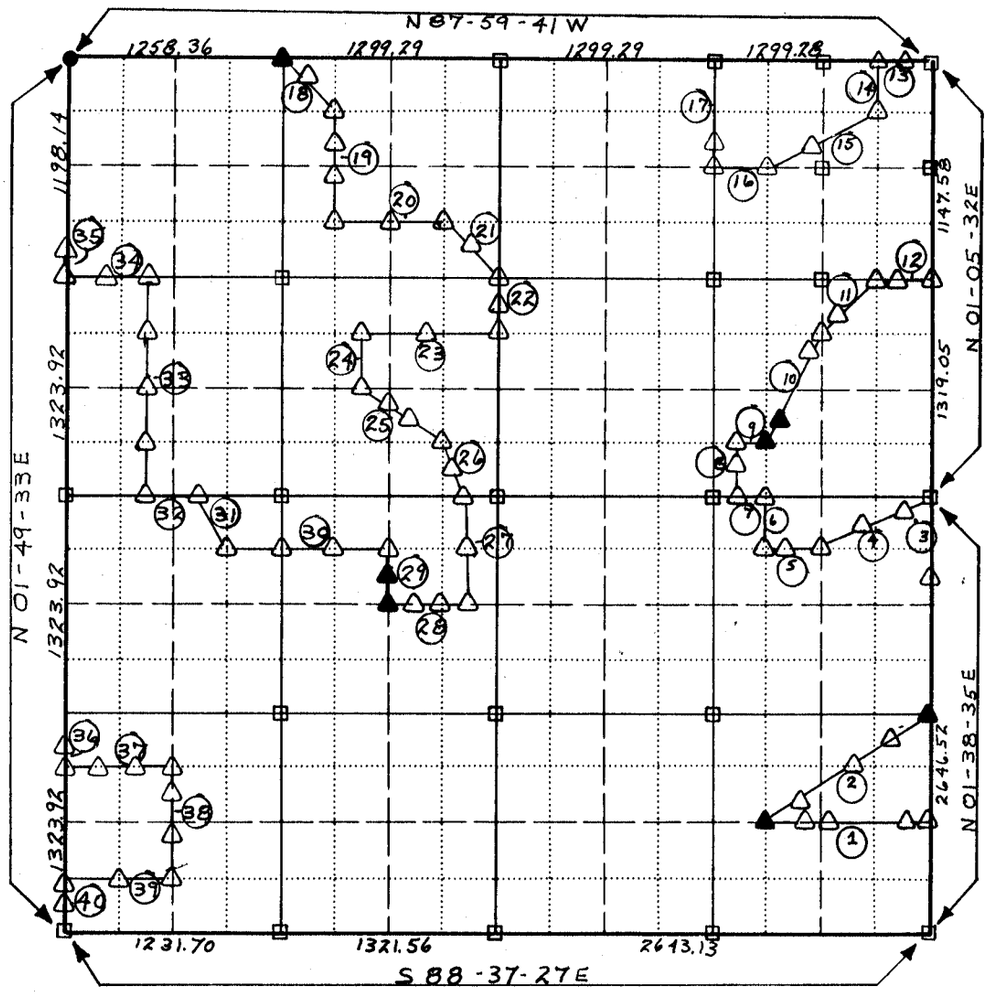

FULL SECTION APPROXIMATE SCALE 1:12,000

MO. CENTRAL ZONE

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	242-1 = 243-3			291,876.10	251,308.52	TYPE-3
1		N88-29-16W	88.85			
	242-1-A			291,878.55	251,219.71	"
1		N88-29-16W	528.38			
	242-1-B			291,893.07	250,691.54	"
1		N88-29-16W	131.27			
	242-1-C			291,896.69	250,560.33	"
		N88-29-16W	240.64			

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

COUNTY, _____

SURVEYOR _____ REG. NO. _____

Field Book No. 73TR26, 73TR27, 73TR28, 73TR30, 73TR7, 73TR9, ZW64 Date: OCTOBER, 1973 9-11-74

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 OF 7

GN MN

LEGEND
- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 2
- ● FOUND I. P.
- ○ SET I. P
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✳ OTHER

BOUNDARY SURVEYS
TABLE ROCK LAKE
WHITE RIVER, ARKANSAS & MISSOURI

SECTION 6 , T 22 , R 22 COUNTY STONE

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	242-2= BEAMAN 2		959.03	291,903.20	250,319.78	Type 1 Conc. Mon.
2		N57-16-48E	265.64			
	242-2A		960.03	292,046.78	250,543.27	
2		N57-16-48E	399.81			
	242-2B		942.14	292,262.90	250,879.64	
2		N57-16-48E	317.13			
	242-2C		977.55	292,434.32	251,146.45	
2		N57-16-48E	215.71			
	242-3= 206-4-1		964.99	292,550.92	251,327.93	Existing Iron Pipe Conc. Type 1
	240-1= 206-4-4		953.20	293,369.56	251,351.27	Existing Iron Pipe
3		N01-39-16E	492.49			
	240-2		961.56	293,861.84	251,365.49	Existing Iron Pipe
4		S64-56-10W	267.81			
	240-2A		961.44	293,748.39	251,122.90	
4		S64-56-10W	190.82			
	240-2B		965.95	293,667.56	250,950.06	
4		S64-56-10W	280.17			
	240-3		954.11	293,548.87	250,696.27	
5		N88-42-25W	204.92			
	240-3A		962.87	293,553.49	250,491.40	
5		N88-42-25W	125.08			
	240-4		955.71	293,556.32	250,366.35	
6		N01-38-24E	328.98			
	240-5		966.91	293,885.16	250,375.77	Yield to Existing Iron Pin
7		N89-09-38W	165.01			
	240-6= 224-1		941.96	293,887.58	250,210.78	
8		N01-47-28E	213.80			
	224-1A		946.03	294,101.27	250,217.46	
8		N01-47-28E	131.55			
	224-2		937.71	294,232.76	250,221.57	Yield To Existing Pipe
9		S87-30-16E	166.22			
	224-3		956.30	294,225.52	250,387.63	Yield To Exist. I.P. Conc. Type 1
10		N28-20-13E	205.09			
	224-3A		955.13	294,406.04	250,484.98	Conc. Type 1
10		N28-20-13E	396.44			
	224-3B		952.46	294,754.98	250,673.16	
10		N28-20-13E	135.05			
	224-4		933.18	294,873.84	250,737.26	Yield To Existing Iron Pin

SHEET 2 OF 7

SWL FORM 136
REVISED OCT. 1971

BOUNDARY SURVEYS
TABLE ROCK LAKE
WHITE RIVER, ARKANSAS & MISSOURI

SECTION 6 , T 22 , R 22 COUNTY STONE

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
11		N47-07-02E	195.79			
	224-4A			295,007.08	250,880.72	YIELD TO EXISTING IRON PIN
11		N47-01-42E	270.00			
	224-5		942.28	295,191.12	251,078.28	YIELD TO EXISTING IRON PIN
12		S88-09-17E	119.52			
	224-5A		953.14	295,187.27	251,197.74	YIELD TO EXISTING IRON PIN
12		S88-09-17E	210.15			
	224-6 = 206-5-1		946.21	295,180.50	251,407.78	YIELD TO EXISTING IRON PIN
	217-7-2 = 224-7		983.76	296,336.04	251,162.34	YIELD TO PLAT
13		N88-56-18W	43.51			
	224-8		990.45	296,336.85	251,118.84	YIELD TO EXISTING IRON PIN
14		S02-00-27W	286.92			
	224-9		939.14	296,050.10	251,108.79	YIELD TO EXISTING IRON PIN
15		S67-38-59W	423.61			
	224-9A		950.99	295,889.01	250,717.00	YIELD TO EXISTING IRON PIN
15		S69-11-00W	297.23			
	224-10		942.29	295,783.39	250,439.18	YIELD TO EXISTING IRON PIN
16		N88-37-38W	329.39			
	224-11		933.07	295,791.29	250,109.88	YIELD TO EXISTING CONC. TYPE 1
17		N02-01-47E	139.83			
	224-11A		942.41	295,931.03	250,114.34	YIELD TO LOT LINE CONC. TYPE 1
17		N02-01-47E	442.54			
	224-12 = 221-1		927.69	296,373.29	250,130.51	YIELD TO EXISTING IRON PIN
	222-1-3		943.37	296,464.08	247,560.52	YIELD 1/2" BAR
18		S45-50-40E	100.13			
	222-1-3A		954.94	296,394.33	247,632.36	
18		S45-50-40E	336.96			
	222-1-4		959.62	296,159.60	247,874.11	YIELD 1/2" BAR
19		S02-05-44W	99.96			
	222-1-4A		973.16	296,059.71	247,870.46	
19		S02-05-44W	200.20			
	222-1-4B		980.64	295,859.64	247,863.14	
19		S02-05-44W	290.00			
	222-1-5		963.64	295,569.83	247,852.53	YIELD 1/2" BAR
20		S88-40-21E	400.29			
	222-1-5A		962.21	295,560.56	243,252.51	
20		S88-40-21E	246.93			

SHEET 3 OF 7

SWL FORM 136
REVISED OCT. 1971

BOUNDARY SURVEYS
TABLE ROCK LAKE
WHITE RIVER, ARKANSAS & MISSOURI

SECTION 6 , T 22 , R 22 COUNTY STONE

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	222-1-6		952.55	295,554.84	248,499.38	YIELD ½" BAR
21		S45-36-20W	200.02			
	222-1-6A		959.51	295,414.91	248,642.30	
21		S45-36-20W	236.23			
	224-14		953.63	295,249.64	248,811.10	YIELD ½" BAR
22		S02-27-53W	224.78			
	224-14A		953.42	295,025.07	248801.43	
22		S02-27-53W	105.18			
	222-2-1		939.88	294,919.99	248,796.91	YIELD ½" BAR
23		N88-31-08W	250.00			
	222-2-1A		955.56	294,926.45	248,546.99	
23		N88-31-08W	562.78			
	222-2-2		989.47	294,941.00	247,984.40	YIELD ½" BAR
24		S03-05-30W	329.48			
	222-2-3		943.56	294,612.00	247,966.63	YIELD ½" BAR
25		S54-21-42E	99.95			
	222-2-3A		949.89	294,553.76	248,047.76	
25		S54-21-42E	192.25			
	222-2-3B		954.47	294,441.74	248,204.00	
25		S54-21-42E	292.39			
	222-2-4		948.35	294,271.38	248,441.63	YIELD ½" BAR
26		S24-17-42E	149.90			
	222-2-4A		958.61	294,134.76	248,503.30	
26		S24-17-42E	215.92			
	223-1		952.85	293,937.96	248,592.14	YIELD ½" BAR
27		S02-14-58	400.03			
	223-1A		964.17	293,538.24	248,576.44	
27		S02-14-58	259.83			
	223-2		963.90	293,278.61	248,566.24	YIELD ½" BAR
28		N 88-47-59 W	108.97			
	223-2A		974.83	293,280.89	248,457.29	
28		N 88-47-59 W	189.97			
	223-2B		967.70	293,284.87	248,267.36	
28		N 88-47-59 W	195.63			
	223-3		933.24	293,288.97	248,071.78	YIELD ½" BAR
29		N 02-21-05 E	99.75			
	223-3A		940.91	293,388.64	248,075.87	
29		N 02-21-05 E	230.03			
	223-4		970.64	293,618.47	248,085.31	YIELD ½" BAR

SWL FORM 136
REVISED OCT. 1971

BOUNDARY SURVEYS
TABLE ROCK LAKE
WHITE RIVER, ARKANSAS & MISSOURI

SECTION 6 , T 22 , R 22 COUNTY STONE

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
30		N 88-36-24 W	499.87			
	223-4A		988.36	293,630.62	247,585.59	
30		N 88-36-24 W	309.88			
	223-4B		968.46	293,638.15	247,275.80	
30		N 88-36-24 W	162.53			
	223-5		947.05	293,642.11	247,113.32	YIELD ½" BAR
31		N 23-23-20 W	363.22			
	223-6		956.72	293,975.49	246,969.13	YIELD ½" BAR
32		N 88-38-19 W	313.55			
	223-7		936.49	293,982.94	246,655.67	YIELD ½" BAR
33		N 01-49-35 E	174.99			
	223-7A		961.12	294,157.84	246,661.25	
33		N 01-49-35 E	225.07			
	223-7B		972.65	294,382.80	246,668.42	
33		N 01-49-35 E	300.22			
	223-7C		957.38	294,682.87	246,677.99	
33		N 01-49-35 E	618.42			
	223-8		950.01	295,300.97	246,697.70	YIELD ½" BAR
34		N 88-17-21 W	275.10			
	223-8A		969.78	295,309.18	246,422.72	
34		N 88-17-21 W	196.52			
	216-2-1		935.39	295,315.05	246,226.29	YIELD ½" BAR
35		N 01-45-48 E	39.85			
	216-2-2		939.32	295,354.68	246,227.51	½" BAR YIELD
	211-1-1		950.44	292,407.12	246,133.24	YIELD ½" BAR
36		S 00-50-53 W	49.32			
	211-1-2		957.45	292,357.81	246,132.51	YIELD ½" BAR
37		S 88-16-50 E	270.08			
	211-1-2A		955.49	292,349.71	246,402.47	
37		S 88-16-50 E	279.98			
	211-1-2B		947.24	292,341.31	246,682.32	
37		S 88-16-50 E	73.52			
	211-1-3		940.63	292,339.10	246,755.81	YIELD ½" BAR
38		S 02-21-16 W	149.77			
	211-1-3A		956.70	292,189.45	246,749.66	
38		S 02-21-16 W	200.11			

SWL FORM 136

BOUNDARY SURVEYS
TABLE ROCK LAKE
WHITE RIVER, ARKANSAS & MISSOURI

SECTION 6 , T 22 , R 22 COUNTY STONE

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	211-1-3B		958.04	291,989.51	246,741.44	
38		S 02-21-16 W	311.72			
	211-1-4		944.65	291,678.06	246,728.63	YIELD ½" BAR
39		N 88-06-37 W	99.92			
	211-1-4A		954.69	291,681.36	246,628.77	
39		N 88-06-37 W	517.84			
	211-1-5		970.08	291,698.43	246,111.21	YIELD ½" BAR
40		S 01-49-04 W	118.22			
	216-1-1		953.49	291,580.27	246,107.46	YIELD ½" BAR
	AS PER SECTIONAL BREAKDOWN					
	222-1-3			296,463.07	247,521.51	
18		S 45-39-34 E	439.02			
	222-1-4			296,156.23	247,835.50	
19		S 02-03-41 W	591.33			
	222-1-5			295,565.28	247,814.23	
20		S 88-24-59 E	651.56			
	222-1-6			295,547.27	248,465.54	
21		S 46-17-32 E	437.22			
	224-14			295,245.16	248,781.60	
22		S 01-52-32 W	330.38			
	222-2-1			294,914.96	248,770.79	
23		N 88-34-12 W	816.16			
	222-2-2			294,935.32	247,954.88	
24		S 02-01-47 W	330.58			
	222-2-3			294,604.95	247,943.18	
25		S 54-26-15 E	588.72			
	222-2-4			294,262.56	248,422.08	
26		S 24-31-54 E	367.41			
	223-1			293,928.31	248,574.63	
27		S 01-54-23 W	661.82			
	223-2			293,266.86	248,552.61	
28		N 88-36-50 W	492.37			
	223-3			293,278.77	248,060.39	
29		N 01-59-56 E	330.93			
	223-4			293,609.50	248,071.93	
30		N 88-36-44 W	966.70			
	223-5			293,632.91	247,105.51	

SWL FORM 136
REVISED OCT. 1971

BOUNDARY SURVEYS
TABLE ROCK LAKE
WHITE RIVER, ARKANSAS & MISSOURI

SECTION 6 , T 22 , R 22 COUNTY STONE

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
31		N 23-15-39 W	364.13			
	223-6			293,967.44	246961.71	
32		N 88-36-36 W	311.35			
	223-7			293,974.99	246,650.45	
33		N 01-56-14 E	1323.50			
	223-8			295,297.74	246,695.19	
34		N 88-33-23 W	469.59			
	216-2-1			295,309.57	246,225.75	
35		N 01-49-33 E	40.08			
	216-2-2			295,349.63	246,227.02	
	211-1-1			292,373.29	246,132.14	
36		S 01-49-33 W	41.05			
	211-1-2			292,332.26	246,130.83	
37		S 88-37-08 E	618.42			
	211-1-3			292,317.36	246,749.07	
38		S 01-58-28 W	661.93			
	211-1-4			291,655.81	246,726.27	
39		N 88-37-21 W	616.74			
	211-1-5			291,670.64	246,109.74	
40		S 01-49-33 W	124.17			
	216-1-1			291,546.53	246,105.78	

SHEET 7 OF 7

SWL FORM 136
REVISED OCT. 1971