PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 28, T 22 N., R 23 W. COUNTY STONE

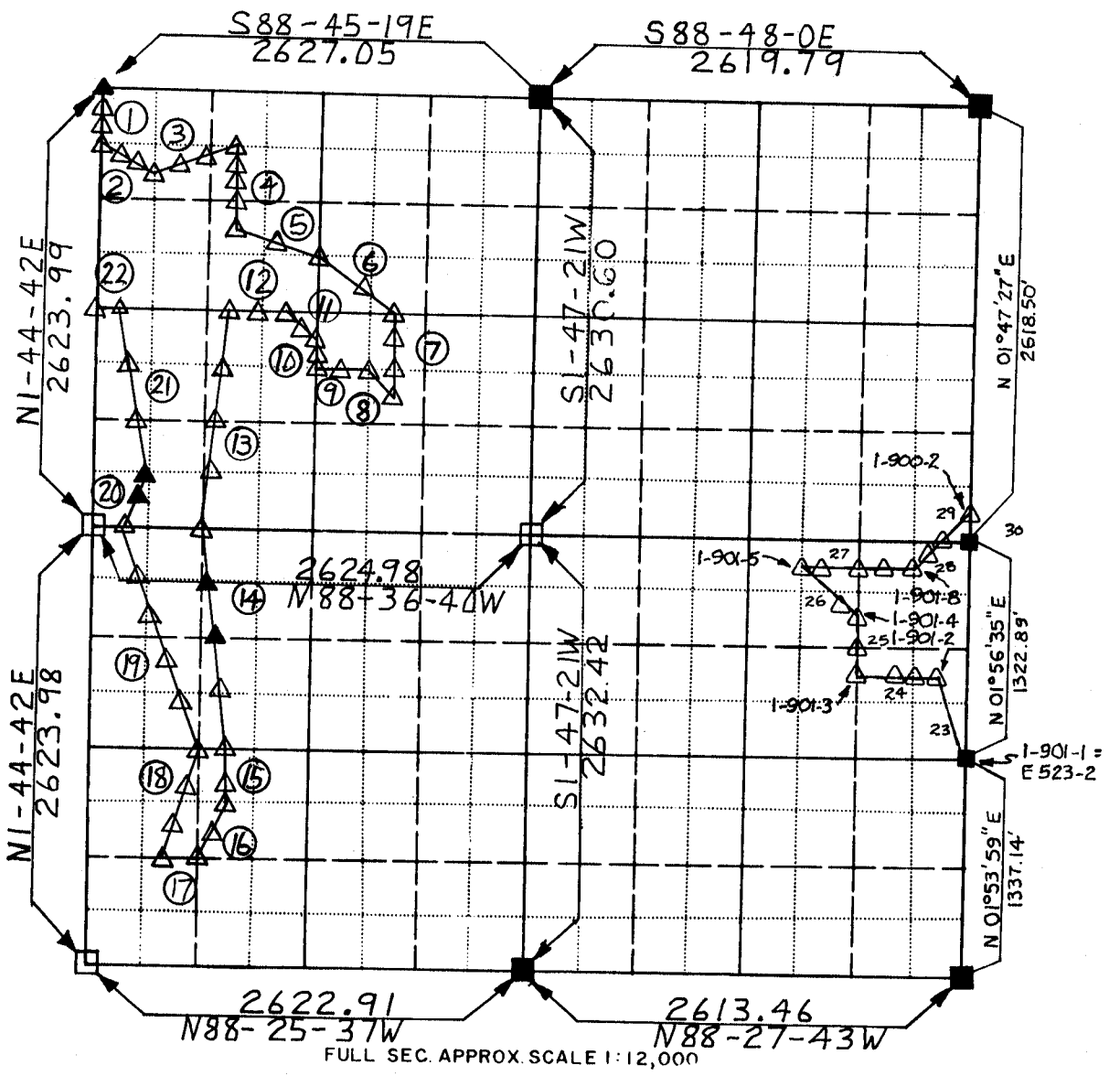

FULL SEC. APPROX. SCALE 1:12,000

MO. CENTRAL ZONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		905-1		999.18	276,182.81	224,703.17	
	1		S1-44-43W	98.91			
		905-1A		991.67	276,083.94	224,700.16	
	1		S1-44-43W	153.66			
		905-1B		957.06	275,930.36	224,695.48	
	1		S1-44-43W	75.43			
		905-2		931.51	275,854.96	224,693.18	
	2		S62-05-33E	64.73			

Field Book No. TR9, TR8 Date: 1971

LEVEL BOOK TR10

73-TR-139 Trav. 10-21-74
73-TR-146 11-25-74

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 28, T 22 N., R 23 W.

STONE COUNTY, MISSOURI

MISSOURI REG. NO. 1409

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 of 7

GN MN 0°32'54" 6°13'

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 28, T 22 N., R 23 W. COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		905-2A		940.31	275,824.66	224,750.38	
	2		S62-05-33E	216.24			
		905-2B		948.45	275,723.45	224,941.48	
	2		S62-05-33E	84.83			
		905-3		940.98	275,683.75	225,016.44	
	3		N72-53-24E	113.47			
		905-3A		939.71	275,717.13	225,124.89	
	3		N72-53-24E	200.10			
		905-3B		921.29	275,776.00	225,316.13	
	3		N72-53-24E	206.88			
		905-4		933.65	275,836.87	225,513.86	
	4		S1-45-32W	119.81			
		905-4A		969.86	275,717.12	225,510.18	
	4		S1-45-32W	142.11			
		905-4B		974.11	275,575.07	225,505.82	
	4		S1-45-32W	133.89			
		905-4C		953.91	275,441.25	225,501.71	
	4		S1-45-32W	96.58			
		905-5		924.90	275,344.72	225,498.74	
	5		S70-13-20E	340.73			
		905-5A		933.76	275,229.42	225,819.37	
	5		S70-13-20E	177.08			
		905-6		946.27	275,169.50	225,986.01	
	6		S54-50-31E	335.60			
		905-6A		944.28	274,976.25	226,260.38	
	6		S54-50-31E	254.10			
		904-1		944.53	274,829.94	226,468.13	
	7		S1-46-31W	106.48			
		904-1A		957.30	274,723.50	226,464.83	
	7		S1-46-31W	126.65			
		904-1B		951.44	274,596.91	226,460.91	
	7		S1-46-31W	259.72			
		903-1		925.40	274,337.33	226,452.86	
	8		N43-24-53W	231.31			

SHEET 2 of 7

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 28, T 22 N., R 23 W. COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		903-2		929.62	274,505.35	226,293.89	
	9		N88-39-55W	192.47			
		903-2A		998.83	274,509.83	226,101.47	
	9		N88-39-55W	135.75			
		904-3		1030.31	274,513.00	225,965.75	
	10		N1-46-02E	75.68			
		904-3A		1014.11	274,588.64	225,968.09	
	10		N1-46-02E	88.53			
		905-7		985.16	274,677.13	225,970.82	
	11		N43-26-38W	112.02			
		905-7A		967.77	274,758.46	225,893.79	
	11		N43-26-38W	119.23			
		905-8		942.29	274,845.03	225,811.80	
	12		N88-41-0W	178.87			
		905-8A		947.76	274,849.14	225,632.98	
	12		N88-41-0W	149.38			
		905-9		935.19	274,852.57	225,483.64	
	13		S8-52-31W	264.12			
		905-9A		958.24	274,591.62	225,442.89	
	13		S8-52-31W	427.55			
		905-9B		965.84	274,169.18	225,376.92	
	13		S8-52-31W	391.39			
		905-9C		951.67	273,782.48	225,316.54	
	13		S8-52-31W	241.23			
		905-10		953.46	273,544.14	225,279.32	
	14		S5-22-03E	416.93			
		905-10A		955.50	273,129.04	225,318.32	
	14		S5-22-03E	494.70			
		905-10B		959.94	272,636.51	225,364.60	
	14		S5-22-03E	205.42			
		905-10C		949.47	272,431.99	225,383.82	
	14		S5-22-03E	205.40			
		902-1		949.59	272,227.49	225,403.03	
	15		S1-45-32W	226.68			

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 28, T 22 N., R 23 W. COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		902-1A		952.62	272,000.92	225,396.07	
	15		S1-45-32W	101.65			
		902-2		971.37	271,899.32	225,392.95	
	16		S28-14-58W	269.64			
		902-2A		968.90	271,661.79	225,265.33	
	16		S28-14-58W	97.95			
		902-3		964.97	271,575.50	225,218.96	
	17		N88-28-23W	163.60			
		902-4		933.88	271,579.85	225,055.42	
	18		N15-45-0E	266.12			
		902-4A		922.87	271,835.98	225,127.65	
	18		N15-45-0E	249.33			
		902-4B		934.00	272,075.95	225,195.33	
	18		N15-45-0E	161.94			
		902-5		914.96	272,231.81	225,239.29	
	19		N18-52-0W	331.12			
		902-5A		921.41	272,545.14	225,132.21	
	19		N18-52-0W	211.93			
		902-5B		926.51	272,745.68	225,063.68	
	19		N18-52-0W	238.09			
		902-5C		952.57	272,970.98	224,986.69	
	19		N18-52-0W	341.45			
		902-5D		953.25	273,294.09	224,876.28	
	19		N18-52-0W	276.77			
		905-11		954.72	273,555.99	224,786.78	
	20		N28-12-0E	158.79			
		905-11A		952.38	273,695.93	224,861.82	
	20		N28-12-0E	209.02			
		905-12		925.81	273,880.14	224,960.59	
	21		N7-03-13W	451.92			
		905-12A		933.48	274,328.64	224,905.10	
	21		N7-03-13W	293.10			
		905-12B		935.76	274,619.52	224,869.11	
	21		N7-03-13W	319.61			

SHEET 4 of 7

SWL FORM 136
REVISED FEB. 66

PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 28, T 22 N., R 23 W. COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		905-13			274,936.71	224,829.86	NOTHING SET IN LAKE
	22		N88-37-45W	165.00			YIELD TO ELMORE WLY COR
		906-1-1		937.25	274,940.66	224,664.91	YIELD - 3/8" BAR
		905-12			273,880.14	224,960.59	S.B.
	21		N7-41-13W	996.46			
		905-13			274,867.65	224,827.30	S.B.
	22		N88-41-00W	164.13			
		906-1-1			274,871.43	224,663.22	S.B.

S.B. = AS COMPUTED BY SECTIONAL BREAKDOWN

SHEET 5 of 7

SWL FORM 136
REVISED FEB. 66

BOUNDARY SURVEYS

EASEMENT SURVEY OF
PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SECTION 28, T 22 N., R 23 W. COUNTY STONE

COURSE NO.	MONUMENT NO.	GRID BEARING	DISTANCE	NORTH	EAST	REMARKS
		SEC. 28, T 22 N., R 23 W. COUNTY STONE				
	1-901-1 = E-523-2		966.24'	272 116.06	229 823.53	YIELD TO STONE
23		N 17° 08' 14" W	521.03'			
	1-901-2		948.11'	272 613.96	229 670.00	YIELD TO 3/8" I.P.
24		N 88° 45' 18" W	134.20'			
	1-901-2A		962.01'	272 616.87	229 535.84	YIELD TO 3/8" I.P.
24		N 88° 45' 18" W	106.26'			
	1-901-2B		957.19'	272 619.18	229 429.60	YIELD TO 3/8" I.P.
24		N 88° 45' 18" W	454.46'			
	1-901-3		925.58'	272 624.71	229 175.20	YIELD TO 3/8" I.P.
25		N 01° 16' 39" E	178.40'			
	1-901-3A		949.00'	272 803.07	229 179.18	YIELD TO 3/8" I.P.
25		N 01° 16' 39" E	151.19'			
	1-901-4		945.68'	272 954.23	229 182.55	YIELD TO 3/8" I.P.
26		N 43° 43' 59" W	152.55'			
	1-901-4A		946.34'	273 064.46	229 077.09	YIELD TO 3/8" I.P.
26		N 43° 43' 59" W	313.61'			
	1-901-5		922.74'	273 291.06	228 860.29	YIELD TO 3/8" I.P.
27		S 88° 44' 24" E	109.41'			
	1-901-5A		948.06'	273 288.65	228 969.69	YIELD TO 3/8" I.P.
27		S 88° 44' 24" E	213.86'			
	1-901-5B		973.75'	273 283.95	229 183.49	YIELD TO 3/8" I.P.
27		S 88° 44' 24" E	154.03'			
	1-901-5C		973.57'	273 280.15	229 337.48	YIELD TO 3/8" I.P.
27		S 88° 44' 24" E	182.00'			
	1-901-6		948.62'	273 276.56	229 519.44	YIELD TO 3/8" I.P.
28		N 50° 16' 24" E	115.52'			
	1-901-6A		944.04'	273 350.39	229 608.29	YIELD TO 3/8" I.P.
28		N 50° 16' 24" E	124.35'			
	1-901-7 = 1-900-1		920.28'	273 429.87	229 703.93	YIELD TO 3/8" I.P.
29		N 44° 31' 33" E	241.17'			
	1-900-2		977.06'	273 601.81	229 873.04	YIELD TO 3/8" I.P.
30		S 01° 45' 48" W	163.66'			
	E-523-3		960.55'	273 438.23	229 868.01	YIELD TO STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	EAST	REMARKS

Field Book No. TR 11 Date: 1971

CERTIFICATE OF SURVEY
I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 28, T 22 N., R 23 W.

STONE B. SLACK
COUNTY, MISSOURI

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

GN MN 0°32'54" 7°30' E

LEGEND
- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER
- ✱ - OTHER

SHEET 6 of 7 SHEET 7 OF 7

SWL FORM 136
REVISED OCT. 1971