BOUNDARY SURVEYS
DARDANELLE LAKE
ARKANSAS RIVER, ARKANSAS

SECTION 8 ,T 8N ,R 25W COUNTY Logan

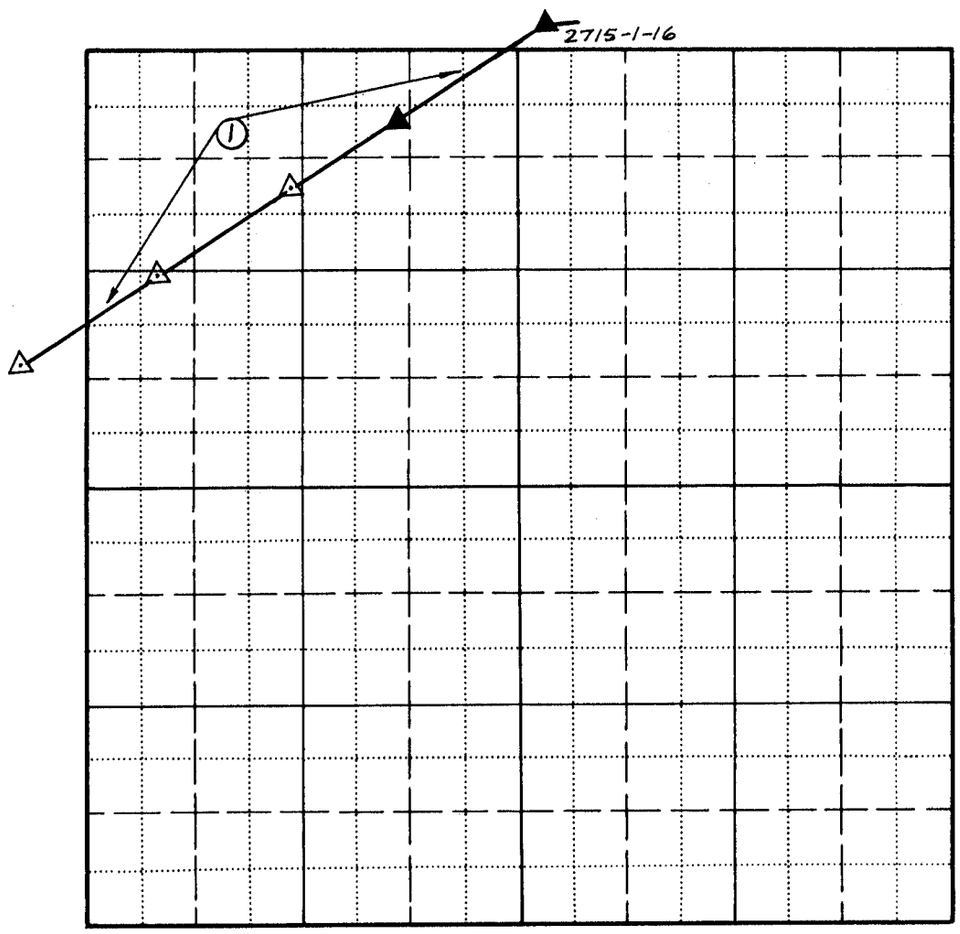

FULL SECTION APPROXIMATE SCALE 1:12,000

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	2715-1-16			386,055.01	1,500,896.13	Conc. Mon. Type I falls in Sec 5
1		S 59-39-07W	1025.93			
	2715-1-16A			385,536.66	1,500,010.78	conc. mon. Type I
1		S59-39-07W	772.24			
	2715-1-16B			385,146.48	1,499,344.36	Type III
1		S 59-39-07W	960.06			
	2715-1-16C			384,661.41	1,498,515.86	Type III
1		S59-39-07W	998.29			

Field Book No. 74-D-1 Date: _____

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T _____, R _____.

_____
COUNTY, ARKANSAS

_____ _____
SURVEYOR REG. NO.

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK
CORPS OF ENGINEERS

SHEET 1 OF 2

GN MN

LEGEND
- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 2
- ● FOUND I. P.
- ○ SET I. P.
- ■ FOUND STONE
- □ COMPUTED CORNER
- ✳ OTHER

LAKE DARDANELLE
ARKANSAS RIVER, ARKANSAS

SECTION 8 , T 8N , R 25W COUNTY Logan

COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	2715-1-16D			384,157.02	1,497,654.36	Not in sec. 8 falls in sec. 7

SHEET 2 OF 2

SWL FORM 136
REVISED OCT. 1971