PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 36, T 23 N, R 24 W COUNTY STONE

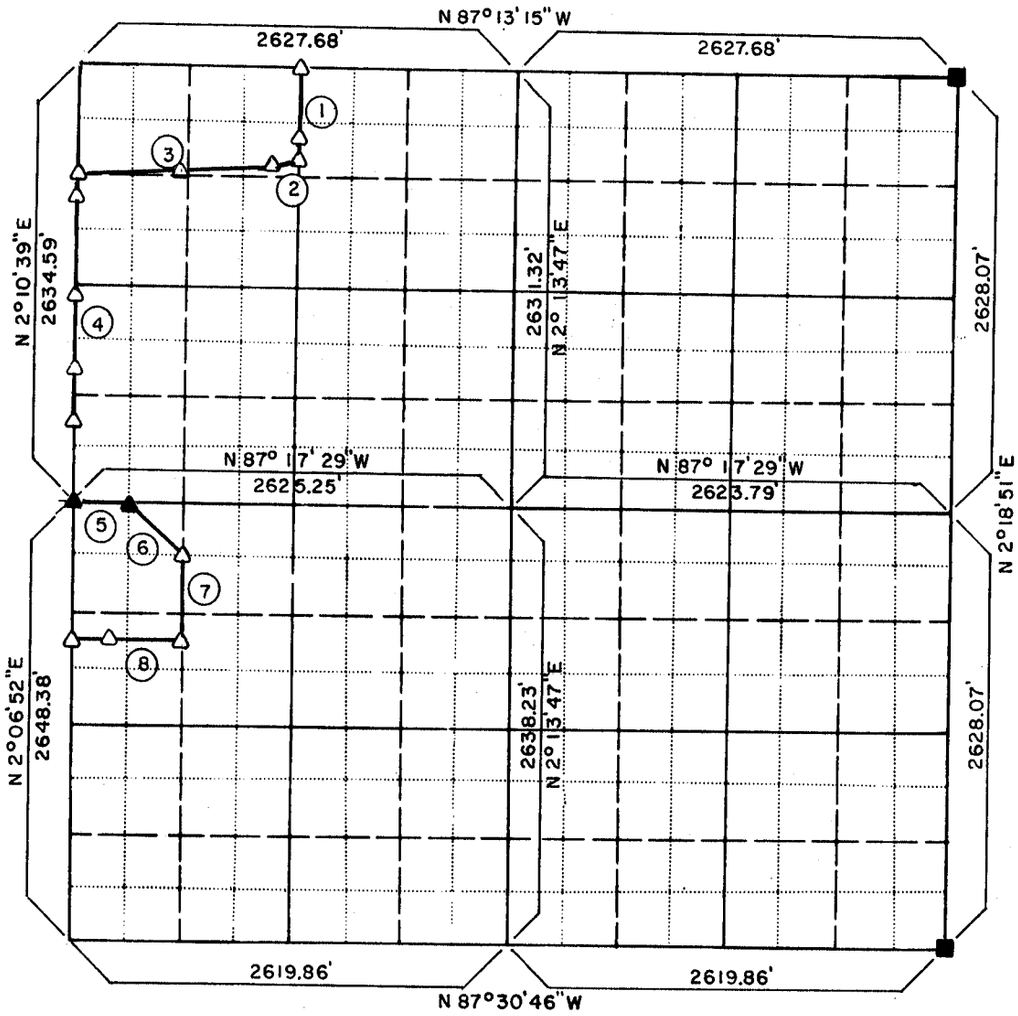

FULL SEC. APPROX. SCALE 1:12,000

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
G		727-1-7		950.62	303081.91	211051.25	T-3
	1		S 2° 12' 13" W	432.06'			
G		727-1-7A		962.55	302650.17	211034.64	T-3
	1		S 2° 12' 13" W	141.40'			
G		727-1-8		955.57	302508.86	211029.20	T-3
	2		S 79° 38' 44" W	141.21'			
G		727-1-9		962.96	302483.49	210890.29	T-3
	3		S 87° 41' 45" W	551.19'			
G		727-1-9A		985.70	302461.33	210339.55	T-3

Field Book No. MASTER 82-TR-46 Date: 1987

CERTIFICATE OF SURVEY

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION 36, T 23N, R 24W.

PREPARED BY

MIDWEST SURVEYORS

FOR

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK

GN MN 0° 20' 6°

LEGEND

- ▲ - MONUMENT TYPE 1
- △ - MONUMENT TYPE 3
- ● - FOUND I. P.
- ○ - SET I. P.
- ■ - FOUND STONE
- □ - COMPUTED CORNER

PARTIAL BOUNDARY SURVEYS
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 36, T 23 N, R 24 W COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
	3		S 87° 41' 45" W	628.07'			
G		727-1-10		995.45	302436.08	209711.98	T-3
	4		S 2°10'39"W	180.46'			
G		727-1-10A		966.46	302255.75	209705.13	T-3
	4		S 2°10'39"W	540.71'			
G		727-1-10B		1006.36	301715.43	209684.58	T-3
	4		S 2°10'39"W	399.96'			
G		727-1-10C		984.27	301315.75	209669.38	T-3
	4		S 2°10'39" W	309.44'			
G S		727-1-11= 1913-3-1		951.55	301006.54	209657.63	T-3
S G		1913-3-4= 727-1-12		954.61	300512.91	209638.85	T-1 Exist Mon.
	5		S 87°22'09"E	329.65'			
G		727-1-13		937.96	300497.78	209968.19	T-1 Exist Rebar
	6		S 42°29'50"E	466.02'			
G		727-1-14		934.93	300154.07	210283.05	T-3 Exist Rebar
	7		S 2°32'02"W	494.81'			
G		727-1-15		926.05	299659.59	210261.18	T-3 Exist Rebar
	8		N 87° 25' 36"W	456.05'			
G		727-1-15A		933.38	299680.06	209805.58	T-3
	8		N 87° 25'36"W	204.04'			
G		727-1-16		939.29	299689.23	209601.75	T-3 Exist Rebar
AS PER SECTION BREAKDOWN							
S G		1913-3-4= 727-1-12			300512.90	209638.85	T-3
	5		S 87°22'11" E	329.65'			
G		727-1-13			300497.77	209968.15	T-3
	6		S 42°11'02"E	467.47'			
G		727-1-14			300151.38	210282.06	T-3
	7		S 2°08'35"W	496.09'			
G		727-1-15			299655.63	210263.51	T-3
	8		N 87°21'38"W	655.89'			
G		727-1-16			299685.84	209608.32	T-3

BOUNDARY SURVEYS
TABLE ROCK LAKE
WHITE RIVER, ARKANSAS & MISSOURI

SECTION 36 , T 23N , R 24W COUNTY STONE

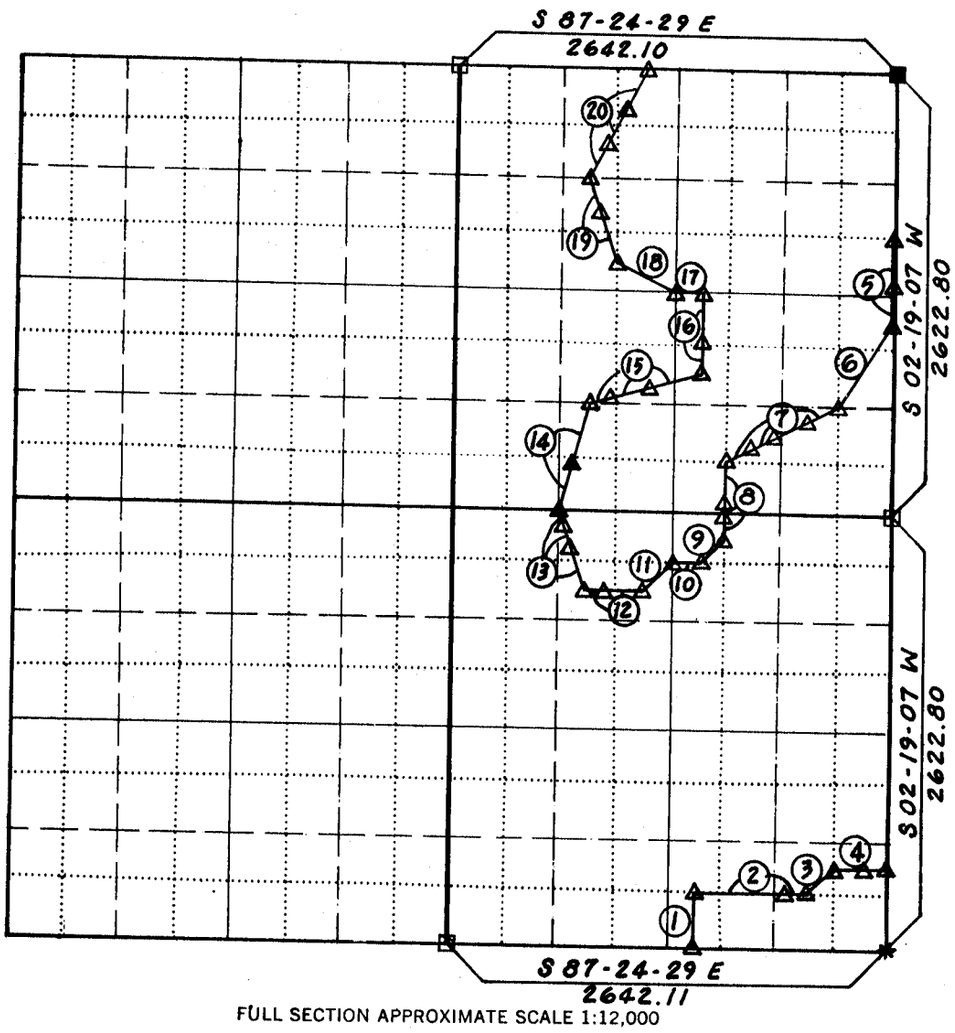

FULL SECTION APPROXIMATE SCALE 1:12,000

MO. CENTRAL ZONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		721-1			297,691.22	213,621.17	
	1		N 02-19-07 E	327.85			
		721-2			298,018.66	213,634.23	
	2		S 87-25-19 E	574.94			
		721-2A			297,992.76	214,208.59	
	2		S 87-25-19 E	85.43			
		721-3			297,988.92	214,293.91	
	3		N 47-37-42 E	232.13			
		721-4			298,145.67	214,465.74	

Field Book Number 69 TR 7,8,9,10 Date July 1971

I HEREBY CERTIFY THAT THE ABOVE PLAT IS A TRUE AND CORRECT REPRESENTATION OF THE SURVEY MADE IN SECTION _____, T_____ R

U. S. ARMY ENGINEER DISTRICT, LITTLE ROCK

GN MN

LEGEND
- ▲ MONUMENT TYPE 1
- △ MONUMENT TYPE 3
- ● FOUND I. P.
- ○ SET I. P.
- ⚑ FOUND STONE

BOUNDARY SURVEYS
TABLE ROCK LAKE
WHITE RIVER, ARKANSAS & MISSOURI

SECTION 36 , T 23 N , R 24 W COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	ANGLE / GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		721-4A			298,137.47	214,650.01	
	4		S 87-27-04 E	145.77			
		721-5 = 720-1			298,131.00	214,795.60	
		724-3-3			301,892.22	214,945.40	
	5		S 02-30-31 W	297.38			
		724-3-3A			301,595.11	214,932.38	
	5		S 02-30-31 W	197.62			
		724-2-1			301,397.66	214,923.73	
	6		S 36-11-21 W	594.85			
		724-2-2			300,918.19	214,572.94	
	7		S 65-56-01 W	172.11			
		724-2-2A			300,848.15	214,416.12	
	7		S 65-56-01 W	246.03			
		724-2-2B			300,748.03	214,191.95	
	7		S 65-56-01 W	144.57			
		724-2-2C			300,689.20	214,060.23	
	7		S 65-56-01 W	174.05			
		724-2-3			300,618.37	213,901.64	
	8		S 02-30-01 W	255.78			
		724-2-3A			300,362.82	213,890.48	
	8		S 02-30-01 W	73.90			
		724-2-3B			300,288.98	213,887.26	
	8		S 02-30-01 W	165.32			
		723-2			300,123.81	213,880.05	
	9		S 47-30-01 W	233.43			
		723-3			299,966.36	213,708.22	
	10		N 87-29-59 W	165.00			
		723-4			299,973.54	213,543.78	
	11		S 47-30-41 W	233.43			
		724-1-2			299,816.13	213,371.92	
	12		N 87-28-49 W	248.05			
		724-1-2A			299,827.01	213,124.70	
	12		N 87-28-49 W	81.94			

PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 36, T 23 N, R 24 W COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		724-1-3			299,830.61	213,043.04	
	13		N 15-54-49 W	218.93			
		724-1-3A			300,040.97	212,983.06	
	13		N 15-54-49 W	184.07			
		724-1-3B			300,217.84	212,932.63	
	13		N 15-54-49 W	118.25			
		724-1-4			300,331.47	212,900.24	
	14		N 16-32-31 E	263.00			
		724-1-4A			300,583.71	212,975.15	
	14		N 15-14-41 E	417.85			
		724-1-5			300,987.04	213,085.07	
	15		N 79-40-42 E	149.77			
		724-1-5A			301,013.56	213,233.01	
	15		N 78-22-57 E	254.96			
		724-1-5B			301,064.89	213,482.67	
	15		N 78-22-57 E	280.10			
		724-1-6			301,121.28	213,756.95	
	16		N 02-55-42 E	174.90			
		724-1-6A			301,295.89	213,765.88	
	16		N 02-55-42 E	321.63			
		724-1-7			301,616.99	213,782.30	
	17		N 87-24-15 W	165.12			
		724-1-8			301,624.47	213,617.32	
	18		N 61-03-32 W	369.50			
		724-1-9			301,803.29	213,293.94	
	19		N 16-13-27 W	318.45			
		724-1-9A			302,108.98	213,204.98	
	19		N 16-13-27 W	206.75			
		724-1-10			302,307.45	213,147.23	
	20		N 29-27-19 E	273.50			
		724-1-10A			302,545.51	213,281.67	
	20		N 29-27-19 E	257.95			
		724-1-10B			302,770.02	213,408.46	
	20		N 29-27-19 E	204.26			

PARTIAL BOUNDARY SURVEY
TABLE ROCK LAKE
WHITE RIVER, ARK. AND MO.

SEC. 36, T 23 N, R 24 W COUNTY STONE

TRACT NO.	COURSE NO.	MONUMENT NO.	GRID BEARING	ELEVATION / DISTANCE	POSITION NORTH	POSITION EAST	REMARKS
		724-1-11			302,947.81	213,508.87	T-1